


Bronze Series Corn Light Bulb 19w

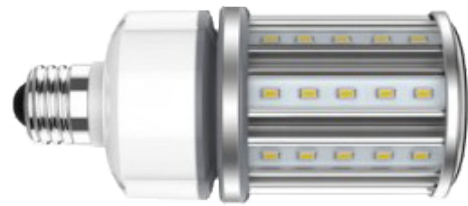

DESCRIPTION:

Touch-Plate's Corn Light Bulbs are designed to offer better security, more lumens, and higher cost savings. Our Corn Light Bulbs can offer energy savings of 70% or greater over traditional CFL or Incandescent lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Cooling heatsink fins
- Omni directional lighting
- >4kv surge protection
- Lifetime of 50,000 hrs or greater
- UL Listed (E364363)
- DLC Listed:
 - GKS28-19w-02D3 E39 (E39 Base Only)
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 19w
- Lumens: 2,500 (approx > 130m/w)
- Lighting Equivalence: 60w Incandescent
- IP Rating: IP64
- LED Chips: LG 5630
- PF: >0.9
- Beam Angle 360°(Standard)
- Color : White

PHYSICAL PARAMETERS:

- Dimensions
 - Diameter 2.52"
 - Height:
 - 6.14"(E26)
 - 6.73"(E39)
- Weight
 - 0.35 lbs

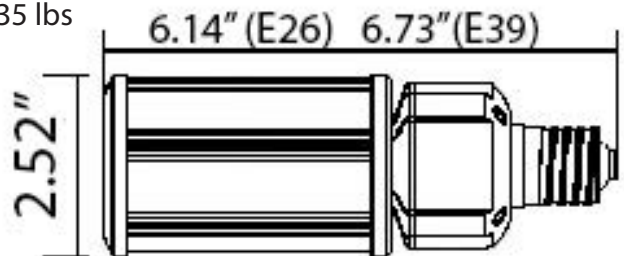




Bronze Series Corn Light Bulb

ORDERING GUIDE

LED Type XXX -	Lumens - Wattage XXX - XXX-	CCT XX	Voltage X -	Base X
<ul style="list-style-type: none"> CLB Corn Light Bulb 	<ul style="list-style-type: none"> 025 - 019 2,500lm - 19w 	<ul style="list-style-type: none"> 35 3500k 40 4000k 45 4500k 50 5000k 	<ul style="list-style-type: none"> U 100-277v 	<ul style="list-style-type: none"> 2 7\$ (% 7%+

PHOTOMETRIC

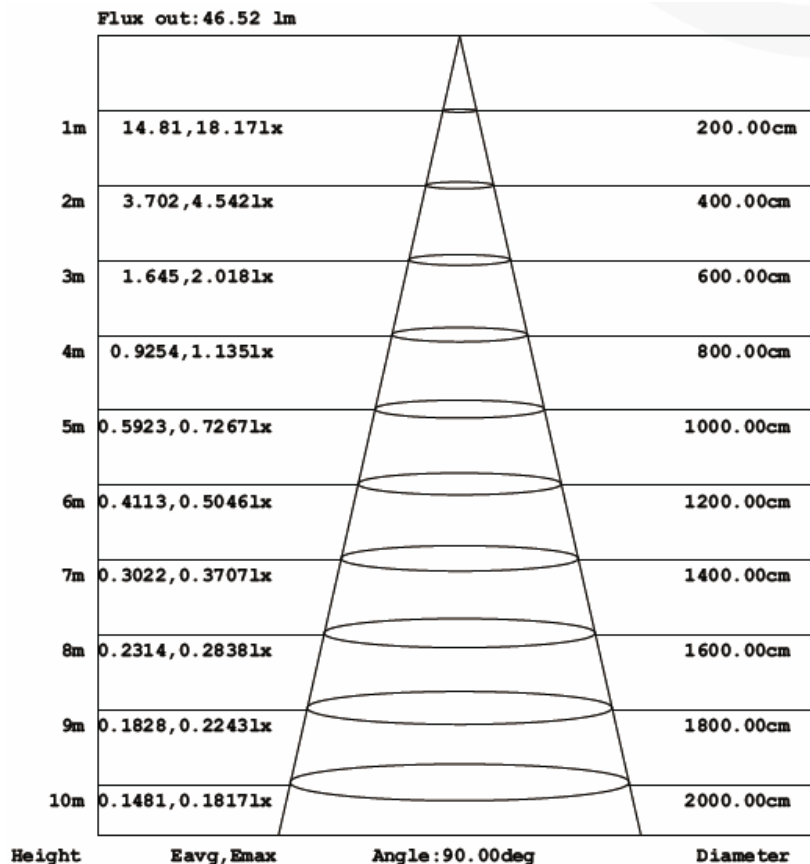

Bronze Series Corn Light Bulb


INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.


INSTALLATION INFORMATION

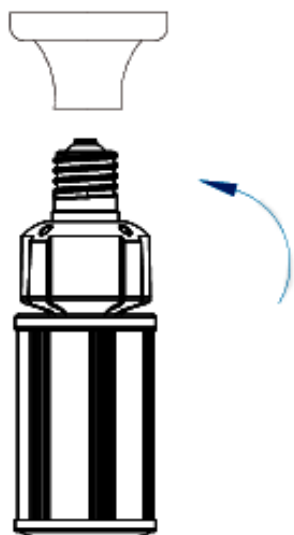

Step:1 Shown in figure 1


Turn off the power before installation.

Remove the old ballast, capacitor and ignitor. (If Existing)

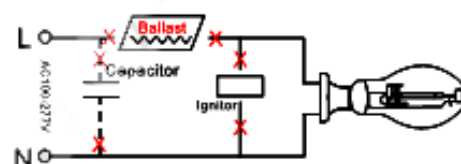

Step: 2 Shown in figure 2

Make sure the alternating Current Wires connect to the E26 or E39 socket directly. (Reattach or replace ground lead if one is needed)

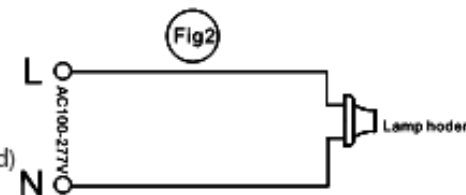

Step: 3 Shown in figure 3

Screw the LED lamp onto the corresponding socket.

