

Warranty and Disclaimer

Within One year after the purchase date, the original buyer may return any XKchrome controller that has failed due to a defect in materials or workmanship. LED strips and pods that have one or more LEDs fail to illuminate due to a defect in materials or workmanship are covered with a lifetime warranty for **the original buyer**.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.

Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 30 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

Instructions

Input & Output: 12V DC

Sensor Wire (optional): Sensor can be connected to any 12V + wire of the vehicle, such as brake light, reverse light, fog light. When that light is on, it will trigger the controller to run an app pre-defined pattern on the connected high power lights.


- For example, if you have a light bar pointing backwards and the sensor wire is connected to your reverse light, when shift gear to “R”, the light bar can automatically come on to illuminate the rear of the vehicle.
- More complicated patterns such as “strobe” or different reaction on each zone can also be defined via the app.

Switch: Short press the switch to select one of the three presets saved in the controller, which can be edited and saved via the app. Long press to turn the lights off. If the signal LED within the switch is breathing, it means the controller is not connected to the app. Once it's connected, the signal LED will turn to solid.

****Multiple XK TITAN controllers can be connected to the app simultaneously.**

To fully utilize all advanced functions of this product, please follow the following steps:


1. **Download the app “XK TITAN”.**
2. **Test controller:** Before mounting the controller, temporarily connect the lights to the desired output wires and attach sensor wire to desired 12V+ source following the below wiring diagram. Note that the bigger output wire is max 300w and other two smaller output wires are 100w each. Connect the input to 12V power. Test all functions using the app and the switch. If you encounter any issue or question, please feel free to contact us via xk@xkglow.com or 217-952-7027 and we will be happy to assist you.

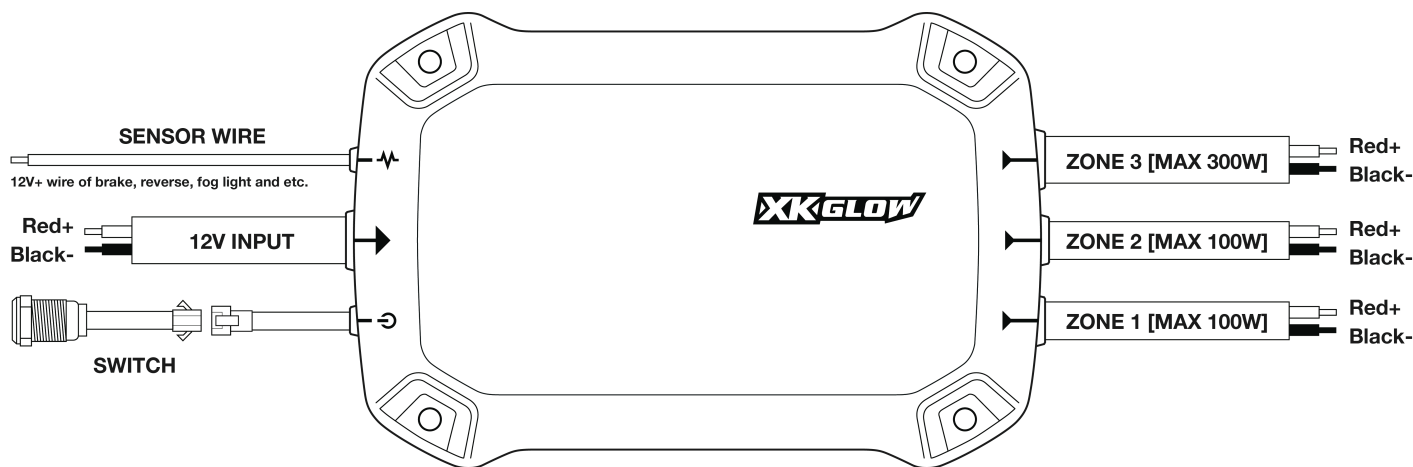

3. **Connect all wires:** Firmly and securely connect the output wires of the controller and the lights. Apply proper insulation. If you have purchased addition fuses, connect them to the “+” wires. Attach sensor wire to desired 12V+ source.
4. **Install the switch:** Choose a place that is secure and easy to access for the switch. If the switch is mounted in a drilled hole, unplug the connector and mount the switch, and then reconnect the connectors.
5. **Mount the controller:** Find a cool and dry location with best Bluetooth signal strength. Clean the mounting surface, and use the provided 3M tape to mount the controller. You can also screw-mount the controller using the four holes on the controller.
6. Firmly connect the input to 12V power and enjoy the light!

XK TITAN App & Controller Manual (v1.0)

Visit www.xkglow.com for latest update

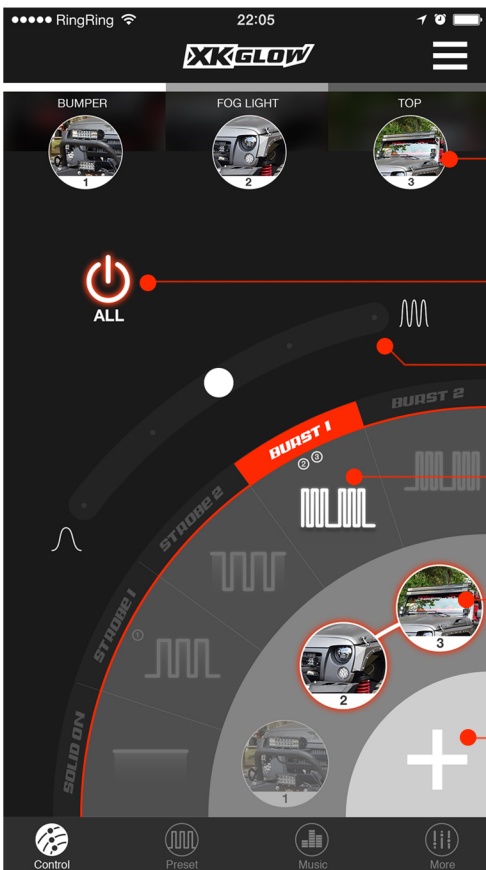

Control Page: This page controls all lights in real time. Changes made in this page can be saved to the controller.

Zone Icon: User can turn on/off each zone by tapping the round zone icon. The photo of each zone can be customized in Device List -> Edit Device.


Turn on/off all zones.

Speed Slide: Adjust the speed of selected pattern.

Pattern Wheel: Rotate the wheel and select pattern for each zone. The desired zones need to be selected first in the **Zone wheel**.

Zone Wheel: Select/unselect zone. Hold and drag zones to group/ungroup. Max 2 controllers (6 zones) can be connected at the same time.

Save the current pattern selection for each zone to the controller. The saved presets can be directly accessed with the switch, or set as the default start-up mode (even without app being connected).

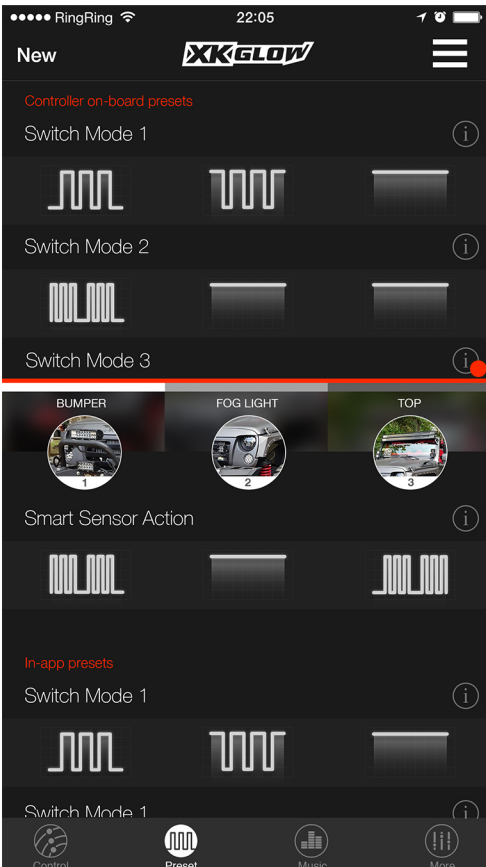

Preset Page: User can customize and save unlimited presets for different scenarios such as "off-road", "Emergency", "Search & Rescue"

Switch Modes: Three of the presets can be saved to the controllers and selected by pushing the provided flush-mounted switch.

Short click the switch to select saved Switch Modes. Hold the switch for 2s to turn off all lights.

Click "i" icon to edit preset.

Smart Sensor Action: When the sensor wire in the controller is triggered by a 12V+ signal, this preset will be activated while the sensor is being triggered. Depending on which 12V+ source the sensor is attached to, this preset can be used for "brake light", "Emergency Strobe", "additional reverse light", etc.

Once saved to controller, the four on-board presets can be accessed without app being connected.

In-app Presets: These presets are only saved in the app.

XK TITAN App & Controller Manual (v1.0)

Visit www.xkglow.com for latest update

Music Page:




Sync light to music in your phone.

Sound Source: Choose between songs in your phone or use mic to pick up sound.

Music Panel: Create your play list and play songs.

Note: Due to system limit, streaming music cannot be synced in this feature.

Control the zone that will sync to music and the zone that stays on patterns assigned in Control page.

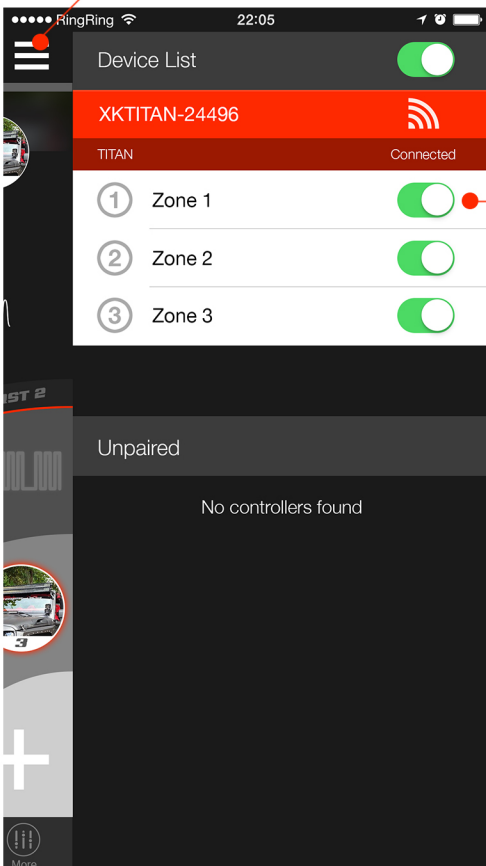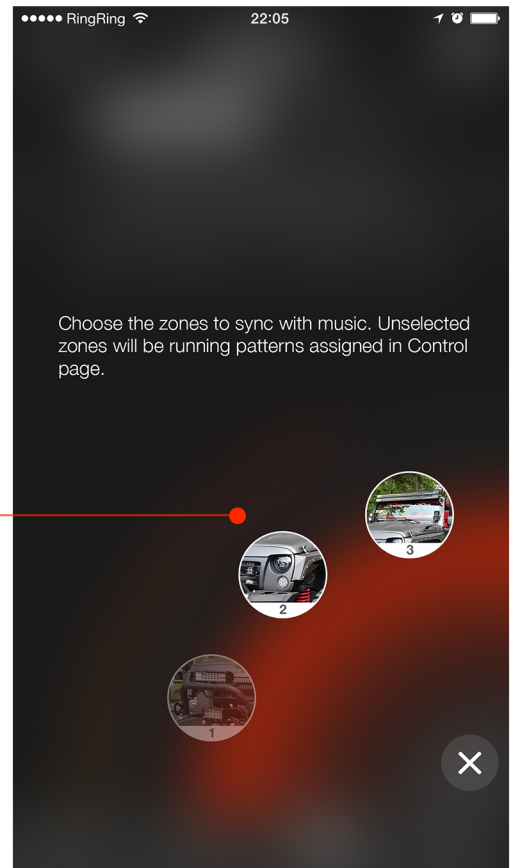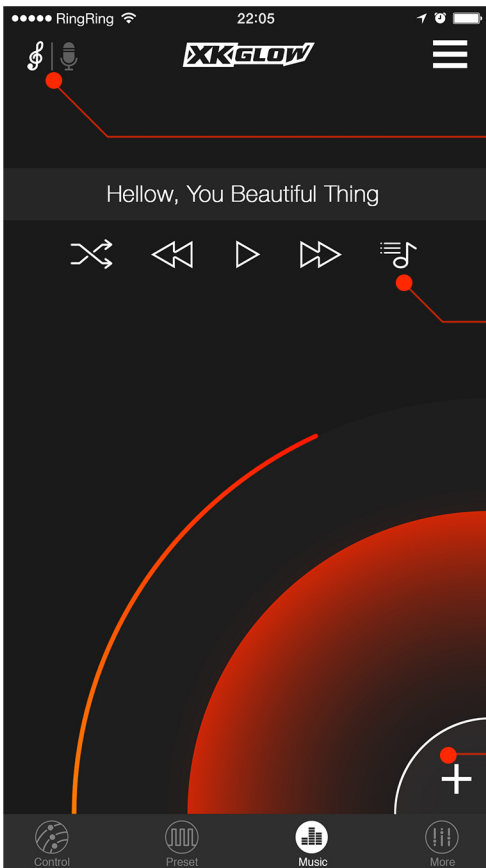

Click to open Device List

Click the title bar to open Edit Device page.

Each zone can also be turned on/off via the switches.

Customize the name and photo for each zone here.

