

Gold Series Linear Tri-Proof 4ft 40w



DESCRIPTION:

Touch-Plate's Linear Tri-Proof Lights are designed to offer better security, more lumens, and higher cost savings. Our Linear Tri-Proof Lights can offer energy savings of 70% or greater over traditional T12 and T8 bulbs. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Polycarbonate housing
- Flicker free
- Water proof
- Rust and corrosion free
- • UL Listed (E481307)
- DLC Listed
 - ZY-S4-40w
- Lifetime of 50,000 hrs or greater
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 40w
- Lumens: 4,800 & 5,200 (approx > 120-130lm/w)
- Equivalence: T12 or T8 Fixtures
- IP Rating: IP65
- LED Chips: SMT
- PF: >0.90

PHYSICAL PARAMETERS:

- Dimensions
 - Length: 47.24"
 - Depth: 2.87"
 - Width: 3.59"
- Weight
 - 4.87lbs

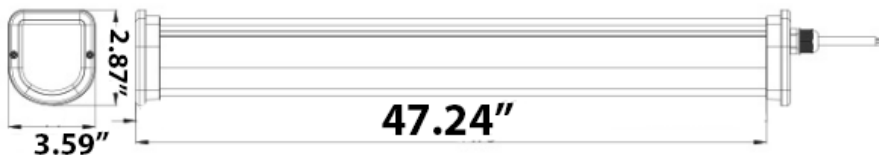



Gold Series Linear Tri-Proof

ORDERING GUIDE


LED Type XXX -	Lumens - Wattage XXX - XXX-	CCT XX	Voltage X -	
<ul style="list-style-type: none"> LT4 Linear Tri-Proof 4ft 	<ul style="list-style-type: none"> 048 - 040 4,800lm - 40w 052 - 040 5,200lm - 40w 	<ul style="list-style-type: none"> 30 3000k 40 4000k 50 5000k 57 5700k 	<ul style="list-style-type: none"> U 120-277v 	

ACCESSORIES

(specified at time of order)

- Emergency Backup
- Photocontrol Sensor
- S Hook Clip: Medium or Large
- Stainless Steel Magnetic 'O' Hook
- 3 Pin Splice Connector
- Wall Mount Installation Kit
- Suspended Mount Installation Kit
- Stainless Steel Cable: 2ft/.5m, 3ft/1m, 7ft/2m, 10ft/3m, or 20ft/6m
- No Plug Extension: 3ft/1m or 10ft/3m
- 3 Prong Plug: 7ft/2m

PHOTOMETRIC

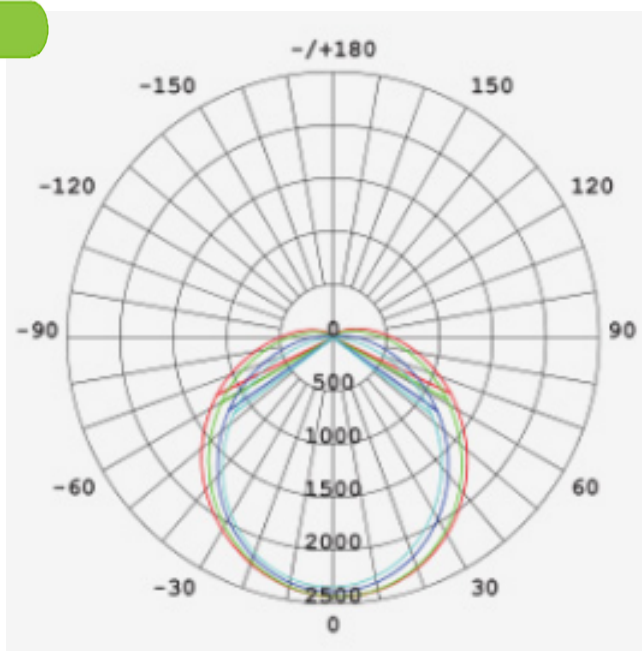

Gold Series Linear Tri-Proof

INSTALLATION INFORMATION (WIRING)


This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION


- Make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION


- Drill two holes in the ceiling/wall at the position you want the fixture to be installed
- Put in the dowels and screw on the mounting clamps
- Install the light by pushing it into the mounting clamps. Make sure the clamps click in
- Secure the mounting connection by screwing in the safety screws into the mounting clamps
- Open the end cap and connect the power line to the terminal block
- Close the end cap and tighten the cable screw to secure the cable
- If you use the light in a continuous line, open up the other side and connect the connection line to the internal terminal block
- Close the end cap and tighten the cable screw to secure the cable

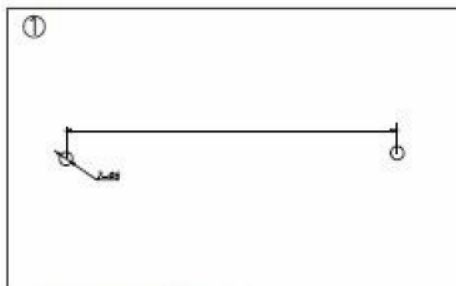


Drill holes in the ceiling/wall

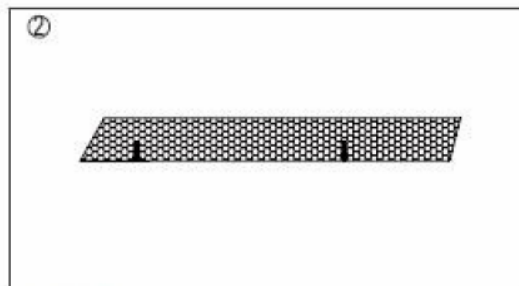

Put in dowels

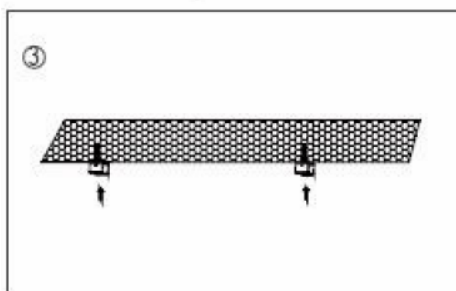

Screw on the mounting clamps

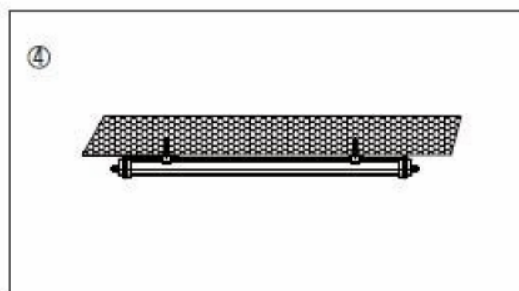

Install the fixture on the clamps

