

Retrofit Kit 150w & 200w



DESCRIPTION:

Touch-Plate's Retrofit Kit Lights are designed to offer better security, more lumens, and higher cost savings. Our Retrofit Kit Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for retrofit installations.

PRODUCT FEATURES:


- Diecast aluminum housing
- No flickering or humming
- Uniform Lighting
- Multiple mounting bracket options
- Lifetime of 50,000 hrs or greater
- UL Listed (E481307)
- DLC Listed
 - ZY-SRT-150W
 - ZY-SRT-200W
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 150w & 200w
- Lumens: 17,200 & 23,000 (approx > 115lm/w)
- Equivalence: 400w - 600w HID/HPS/MH
- IP Rating: IP65
- LED Chips: Philips 3030
- PF: >0.90
- Beam Angle: 120°

PHYSICAL PARAMETERS:

- Dimensions
 - Width 6.75"
 - Length: 10.5"
 - Height: 4.0"
- Weight
 - 5.20 lbs

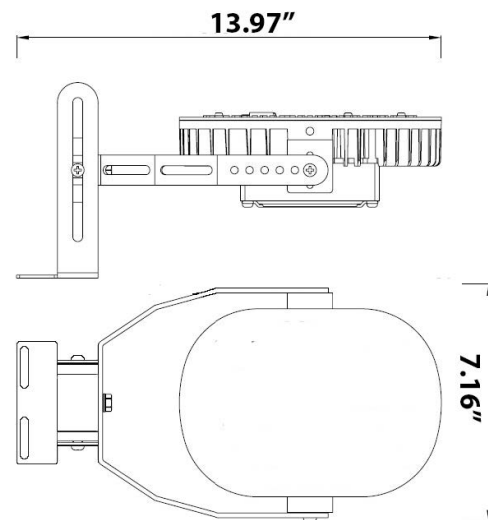




Retrofit Kit

ORDERING GUIDE

LED Type XXX -	Lumens - Wattage XXX - XXX -	CCT XX	Voltage X	
RKO Retrofit Kit (Oval)	172 - 150 17,200lm - 150w 230 - 200 23,000lm - 200w	40 4000k 45 4500k 50 5000k 57 5700k	U 120-277v	

PHOTOMETRIC

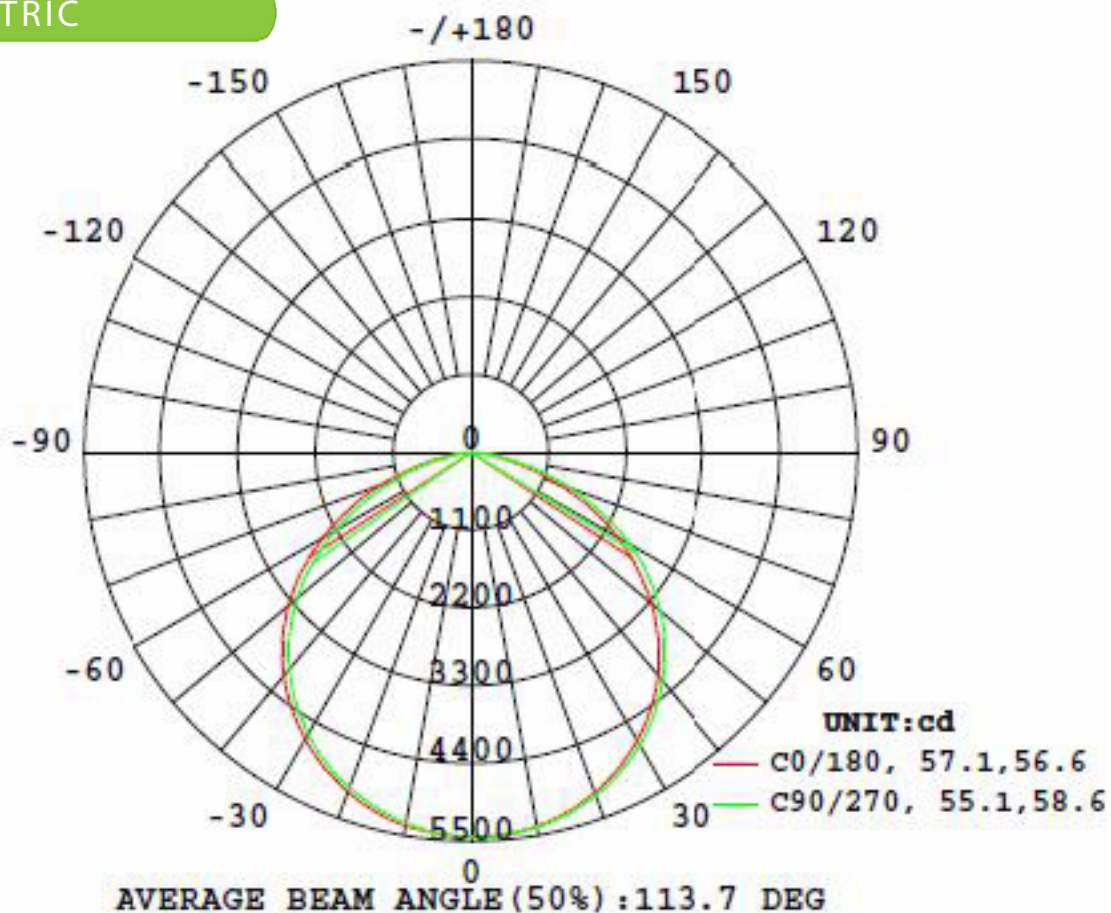

Retrofit Kit

INSTALLATION INFORMATION (WIRING)


This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION

- Remove the old ballast or disconnect the ballast from the existing fixture.
- Wire the load to the provided driver: Red (+) and Black (-).
- Wire the line to the provided driver: Brown (120V), Blue (Neutral), and Green/Yellow (Ground).

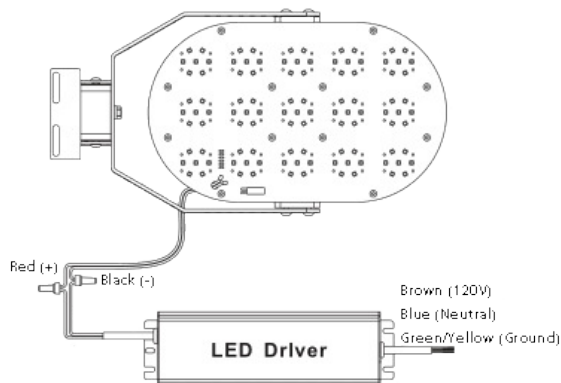

- Affix the Mounting Bracket onto the LED with the provided M6 screw, spring washer, and nut.
- Adjust the LED direction by moving the M6 screw and nut.
- Install the new LED.

