

MULTI-TONE PROGRAMMABLE SPEECH HOOTER



Emergency
alerts



Customizable
tones



Compact and
durable design



Visual
indicators



Loud and
clear audio



Instant
playback



Expandable
features

Product Datasheet

MT-PSH

Multi-Tone Programmable Speech Hooter



MSME
MICRO, SMALL & MEDIUM ENTERPRISES
सूक्ष्म, लघु एवं मध्यम उद्यम

Microcontroller-Based Pre-Recorded Voice Announcement

*Specifications are subject to change without notice.

Parshva Global

Technical Specifications

Feature


Specification

Tone Selection	4 programmable tones with latching push buttons and 1 reset button.
Audio Output	48W dual-channel (L/R), supports up to 2 P.A. horn speakers.
Audio Decoder	High-quality 24-bit decoder; supports MP3/WAV formats.
Inputs	- USB 2.0 port for programming. - 1 terminal for remote reset. - 3.5mm line-in jack for mobile/computer connections. - 2 terminals for Speaker connections.
Memory	16 MB internal flash memory.
Playback	Supports "Power-on Play" for immediate playback.
Power Requirements	230V AC, 50 Hz or 12V DC for backup operation. (110V AC on Request)
Sound Output	110-120 dB.
Visual Alerts (Optional)	Compatible with 12V warning lights; optional revolving LED available.
Enclosure	Red powder-coated sheet metal.
Enclosure Dimensions	228 x 188 x 95 mm (W x L x H), Weight: 2.3 kg.
Speaker Dimensions	315 x 165 x 320 mm (W x L x H), Weight: 2.0 kg.
Standard Package	Includes 1 control unit and 1 PA-type horn speaker.



*Specifications are subject to change without notice.

Parshva Global

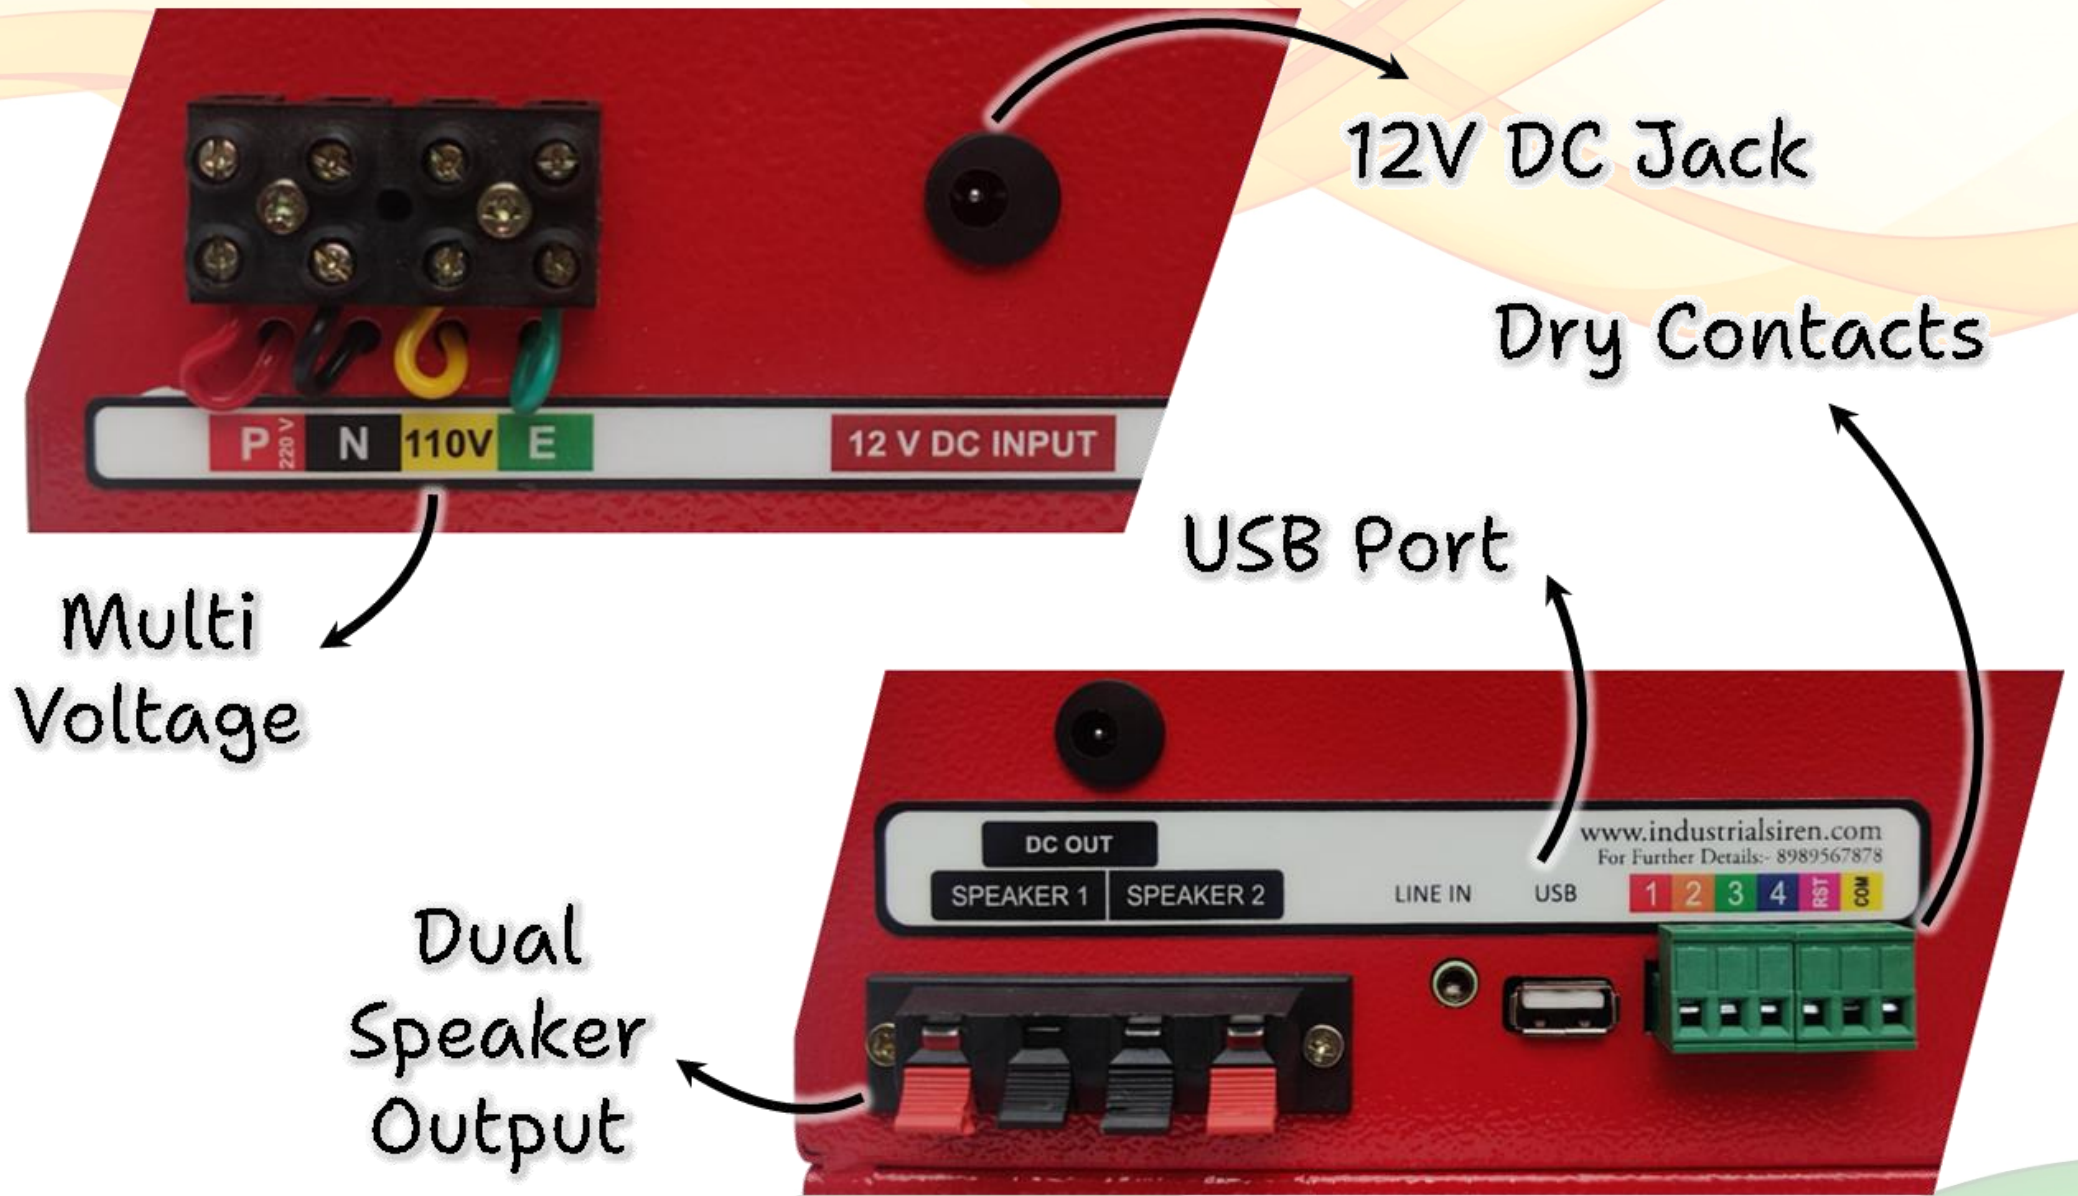

MSME
MICRO, SMALL & MEDIUM ENTERPRISES
सूक्ष्म, लघु एवं मध्यम उद्यम

*Specifications are subject to change without notice.

Parshva Global