

2x Single & JBOD RAID (1/0) functions 2.5" HDD Enclosure

User Manual

Version: 1.0

USB 3.1 Gen 2

10 Gbps


USB Type-C



Please visit our website for manual | www.mediasonicusa.com
 Online forum | <http://forum.mediasonic.ca/>


Quick Installation Guide

Step 1. Detach the screws, slide the upper and lower covers horizontally and then pull them up.

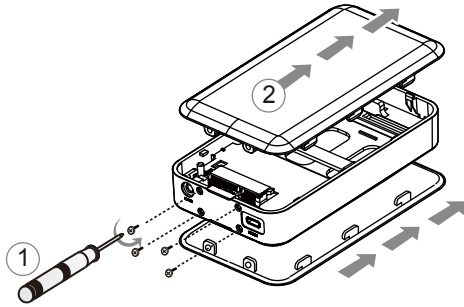


Step 2. Install the upper and lower hard drives gently.


* Stick the pad on the 7mm HDD to stabilize its position

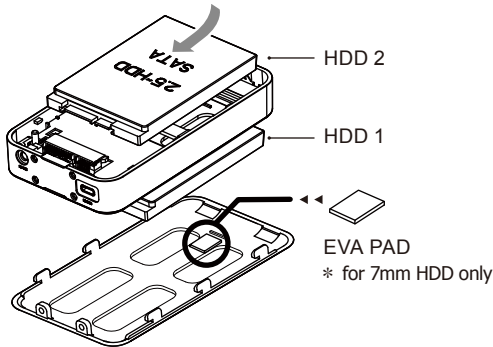

Step 3. Follow the direction to turn on the power.

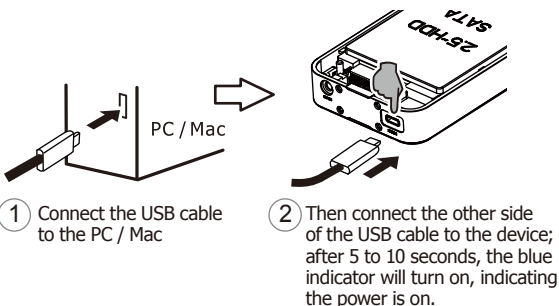

* If the blue indicator doesn't turn on, plug in the adapter and connect the DC power cable to the device (Providing extra power to the device).

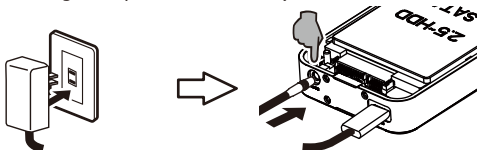


Step 4. Raid Mode configuration

4-1. Make sure the hard drives are properly installed. Power on the enclosure and make sure blue indication is on, before proceeding to setup the raid mode.


Changing the RAID mode may cause data loss. Backup your data before making changes.

Single	JBOD	RAID 1	RAID 0
<p>1 OFF 2 OFF</p>	<p>1 ON 2 ON</p>	<p>1 ON 2 OFF</p>	<p>1 OFF 2 ON</p>

4-2. After selecting the RAID mode, press and keep holding the CFM button till the purple indicator starts flashing. Then, let go of the CFM button. When the purple indicator stops flashing and changes back to blue, the setting is completed.

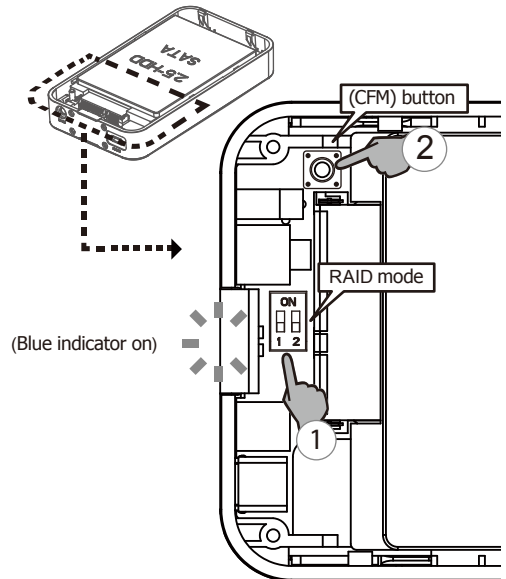


Step 5. Unplug the cables from the device. Put the covers back, then secure them with a screw driver.

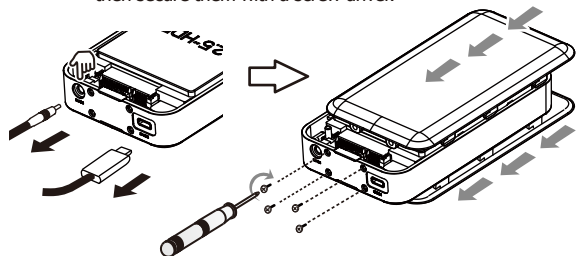

Step 6. Reconnect the USB cable to the PC / Mac and the device. Partition and format the drives to finish.

Overview

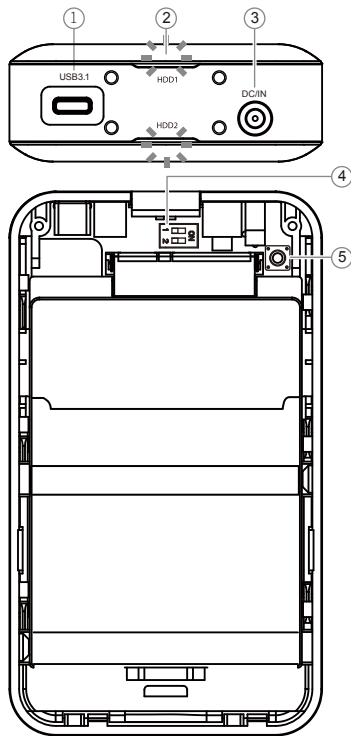

- USB 3.1 port**
Connect the device to computer (PC/Mac)
- HDD 1 / HDD 2 Status**

Link	Blue
Access	Purple
Error	Red (Steady)
Rebuild	Red (Blinking)
- DC/IN**
DC Main Power Socket
- RAID Mode Selection**

Single	JBOD	RAID 1	RAID 0
1 OFF 2 OFF	1 ON 2 ON	1 ON 2 OFF	1 OFF 2 ON

Button

- Confirmation Button**
After selecting the RAID mode, press and keep holding the CFM button till the purple indicator starts flashing. Then, let go of the CFM button. When the purple indicator stops flashing and changes back to blue, the setting is completed.

Cautions

- **Before using RAID enclosure**
 - 1. Changing RAID mode may cause data lost, backup your data before making changes.**
 - When both HDD are installed at the same time in any RAID mode, all data will be formatted.
 - When using "RAID function", HDD of the same capacity, model name and brand is strongly recommended.
 - Check for visible damage on unit, accessories and cables before using the device.

- **HDD format recommended**

Windows 7 ➔ NTFS or exFAT
Mac OS X ➔ HFS+ (Mac OS Extended)
Both Windows and Macintosh OS ➔ FAT32 or exFAT

Notes

- USB port of your PC must support power-off function so that the device would go to sleep mode. Setting up motherboard's (power management) in S3 is strongly recommended please refer to user guide of motherboard BIOS setting.
- For the hard drive compatibility list, please visit our website for detail information.
- We reserves the right to modify or revise the content at anytime without prior notice.
- Visit our website for more details at www.mediasonic.ca/product.php?id=1471385273



Compatibility list

Warning

- Follow all instructions.
- Do not place this device near water.
- Clean only with dry cloth.
- Do not block any ventilation openings.
- Install in accordance with the manufacturer's instructions.
- Do not place near any heat sources such as radiators, heat registers, stoves, or the devices (including amplifiers) that produce heat.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the devices.
- Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon them or against them.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the devices has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the devices, the devices has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Carefully read and follow the Quick Install Guide and User Manual.
- Do not drop or shake the device.
- Do not move the device when it is powered on.
- Do not overload wall outlets.