

NYB problem set 6 answers


Part 1

Question A


Let us consider 2 wires: I_1 and I_2 . The magnetic field of I_2 is out of the page to the left and into the page to the right,

If we consider the force that B_2 exerts on wire 1,

$$\vec{F}_{2 \rightarrow 1} = I_1 \vec{\ell} \times \vec{B}_2,$$

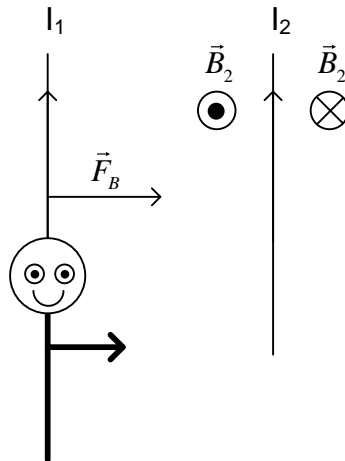


The magnetic field of I_1 is out of the page to the left and into the page to the right. If we consider the force that B_1 exerts on wire 1, $\vec{F}_{1 \rightarrow 2} = I_2 \vec{\ell} \times \vec{B}_1$, the right hand rule (see ED) tells us that the force is directed to the left

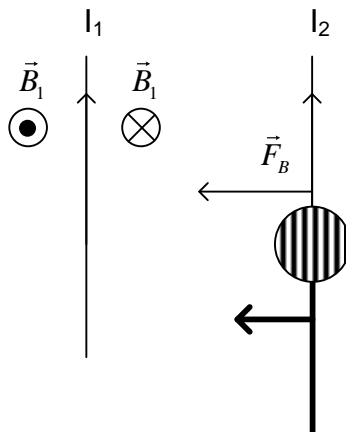


So the two wires attract each other.

Question B

First we consider the force on an electron in this conducting rod: $\vec{F}_B = q\vec{v} \times \vec{B}$ The right hand rule tells us that the force will be directed downward.

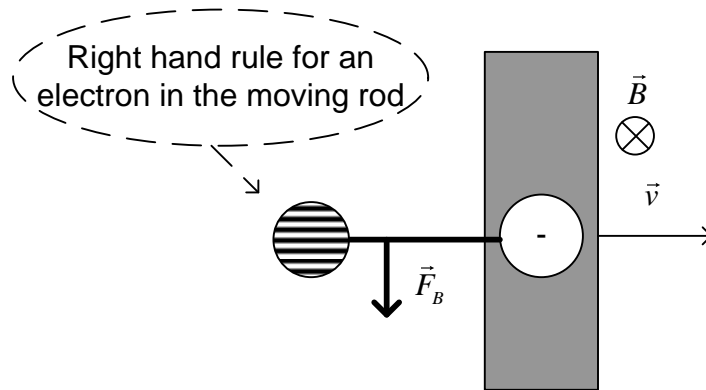


The electrons will accumulate at the bottom of the rod, creating a net negative charge and leaving a net positive charge at the top of the rod. This net charge creates an electric field as shown below.



Question C


a) The magnetic field created by the current is out of the page above the wire and into the page under the wire. The magnetic field gets stronger as we get closer to the wire. As the loop falls, the magnetic field going through the loop points out of the page and the flux increases as the loop falls.

The induced field opposes the increase so the induced field is directed into the page. The right hand rule (ED) gives us the direction of the induced current: clockwise.

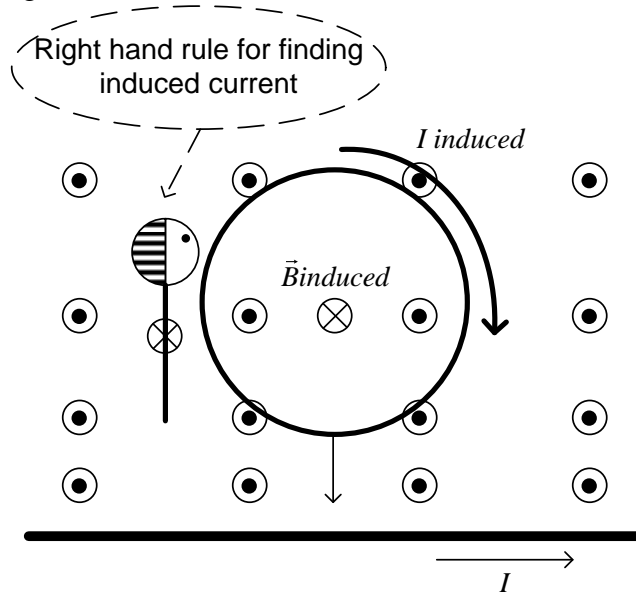


b) The answer does not change once the loop has fallen below the wire. The magnetic from wire is now into the page and decreasing

The induced magnetic field will opposed the decrease and will be also directed into the page.

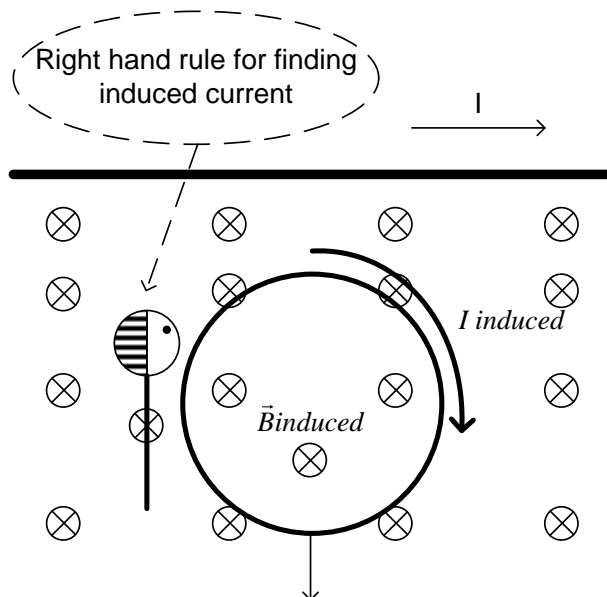


Question D

- a) The magnetic field at 1 is zero which means that the magnetic field due to the wire must be pointing towards the bottom of the page

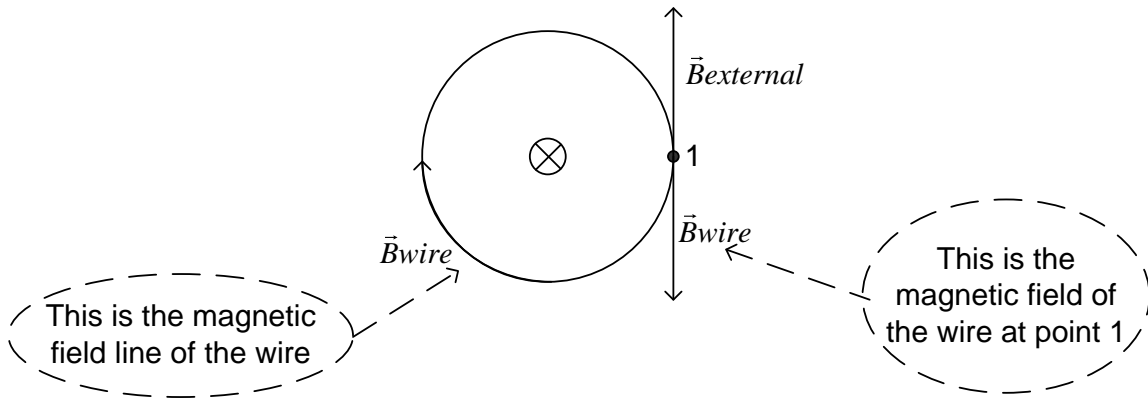


b) $B_{\text{wire}} = B_{\text{external}} = 1 \text{ T}$

therefore $\vec{B}_{\text{resultant}} = \sqrt{B_{\text{wire}}^2 + B_{\text{external}}^2} = \sqrt{2} \text{ T}$

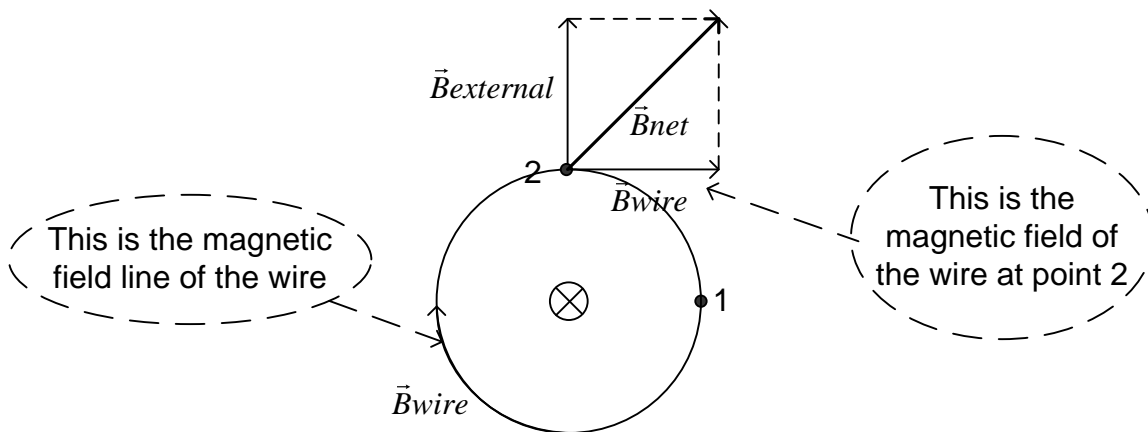

- c) The formula for the magnetic field of a wire is : $B = \frac{\mu_0 I}{2\pi r}$ so if we double the distance r , we halve the magnetic field. $\vec{B}_{\text{wire}} + \vec{B}_{\text{external}} = \frac{1}{2} \text{ T}$

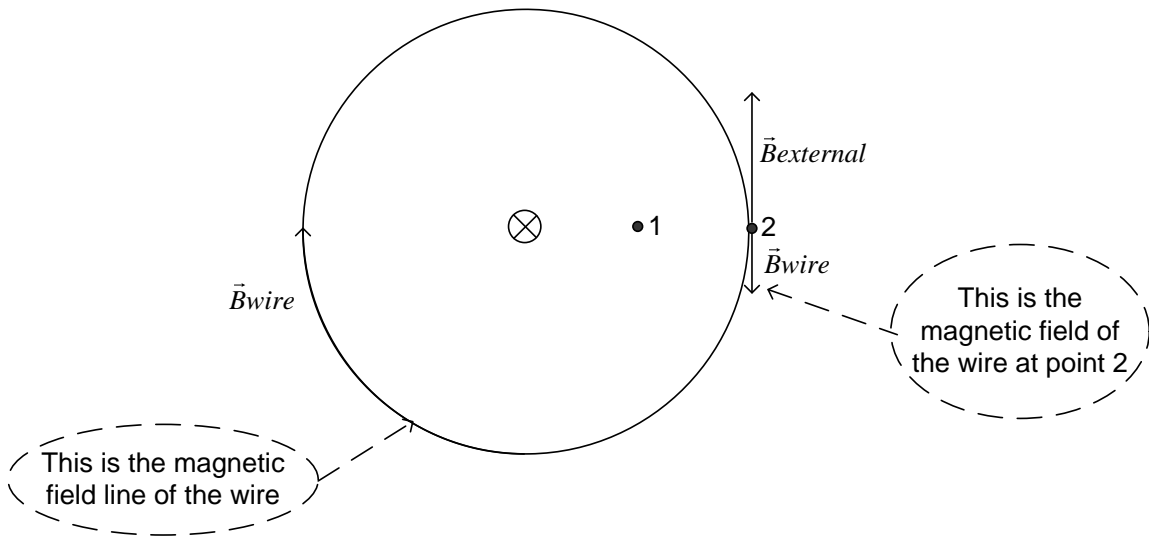


Question E

a) by Newton's third law

Question F

By the right hand rule illustrated below (current comes out of the page) the magnetic field north of the wire points west

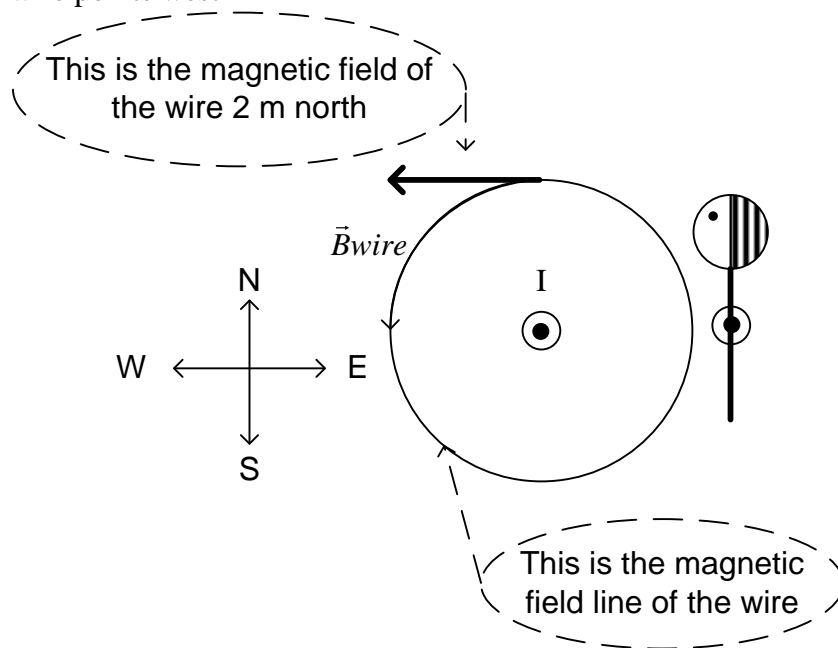

Question G


a) The external magnetic field is upward and increasing. The induced magnetic field will oppose the change in this increase. The induced field will therefore point into the page. By the right hand rule, the current will be clockwise

b) $\vec{\tau} = \vec{\mu} \times \vec{B}$, $|\tau| = \mu B \sin \theta$. The angle between μ and B is 180° so there is no torque

c) If the magnetic field B_0 begins to decrease, the induced magnetic field will oppose the change and be out of the page. The induced current would now be anti-clockwise.

Question H

Inside the magnet the field lines go from South to North

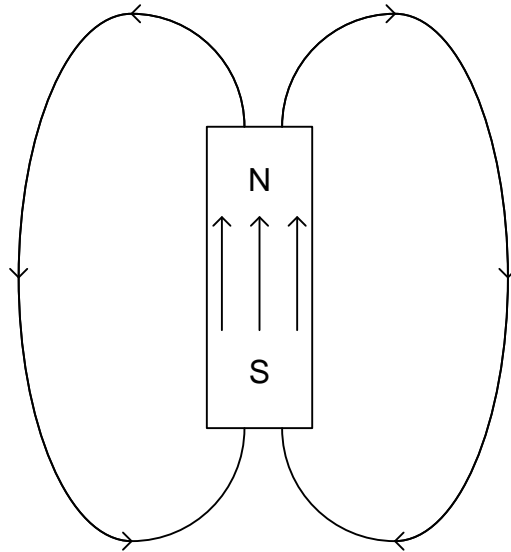


If I push a magnet with the north pole away from me and toward a loop the net magnetic field points into the page and is increasing.

The induced magnetic field will oppose the increase hence the induced field will point out of the page. By the right hand rule the induced current will therefore be counter clockwise


ANS: c)

Question I

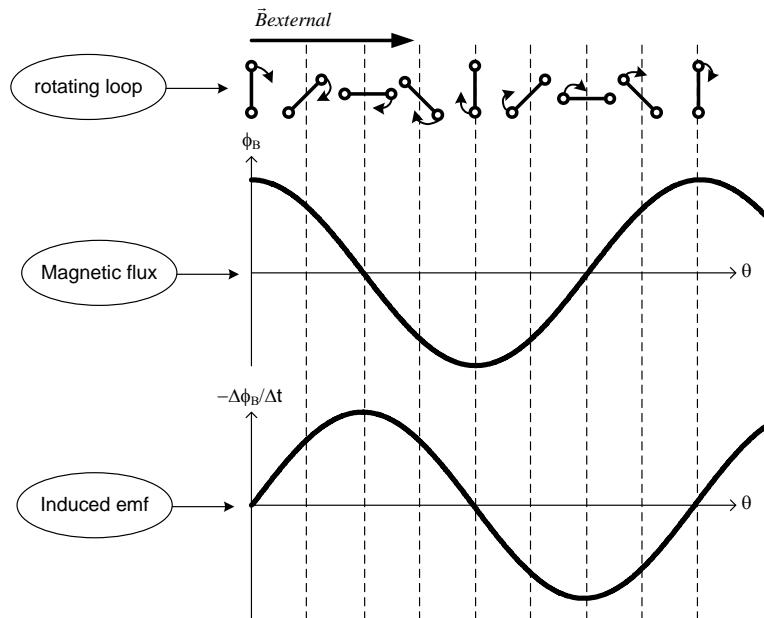

Part B**Question 1**

At point P (location of third wire, the magnetic field due to I_1 and I_2 is as shown.

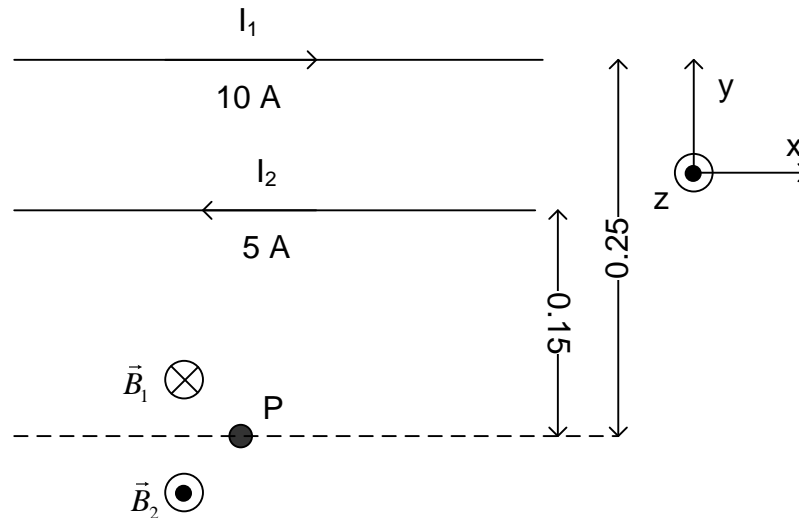

$$a) \vec{B}_p = \vec{B}_1 + \vec{B}_2$$

$$\vec{B}_p = -B_1 \hat{k} + B_2 \hat{k}$$

$$B_{\text{long wire}} = \frac{\mu_0 I}{2\pi r}$$

$$\vec{B}_p = -\frac{2 \times 10^{-7} \times 10}{0.25} \hat{k} + \frac{2 \times 10^{-7} \times 5}{0.15} \hat{k}$$

$$\vec{B}_p = -1.33 \times 10^{-6} \hat{k} \text{ T}$$

The resultant magnetic field at the position of the wire is $-1.33 \times 10^{-6} \text{ T}$

$$b) \vec{F}_3 = I_3 \vec{\ell} \times \vec{B}_p \therefore \vec{B}_p = 0 \text{ [sin}\theta=1\text{]}$$

$$-B_1 \hat{k} + B_2 \hat{k} = 0$$

$$B_1 = B_2$$


$$\frac{\mu_0 I_1}{2\pi r_1} = \frac{\mu_0 I_2}{2\pi r_2}$$

$$I_2 = I_1 \frac{r_2}{r_1}$$

$$I_2 = 10 \times \frac{0.15}{0.25} = 6.00 \text{ A}$$

If the current in I_2 was 6.00 A , the wire would experience no net force due to the other two conductors?

Question 2

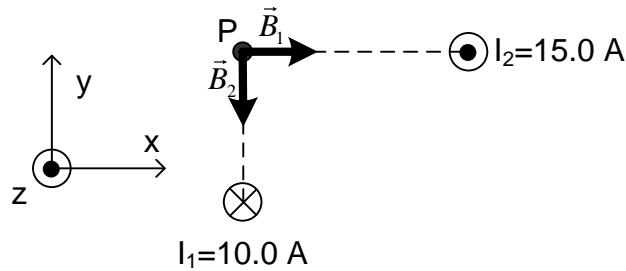

$$\vec{B}_p = \vec{B}_1 + \vec{B}_2$$

$$\vec{B}_p = B_1 \hat{i} - B_2 \hat{j}$$

$$\vec{B}_p = \frac{\mu_0 I_1}{2\pi r_1} \hat{i} - \frac{\mu_0 I_2}{2\pi r_2} \hat{j}$$

$$\vec{B}_p = 2 \times 10^{-7} \times \frac{10}{0.06} \hat{i} - 2 \times 10^{-7} \times \frac{15}{0.08} \hat{j}$$

$$\vec{B}_p = (3.33 \times 10^{-5} \hat{i} - 3.75 \times 10^{-5} \hat{j}) \text{ T}$$

$$\vec{F} = q\vec{v} \times \vec{B}$$


$$\vec{F} = (-1.6 \times 10^{-19}) \times \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & -3 \times 10^6 \hat{k} \\ 3.33 \times 10^{-5} & -3.75 \times 10^{-5} & 0 \end{vmatrix}$$

$$\vec{F} = (1.80 \times 10^{-17} \hat{i} + 1.60 \times 10^{-17} \hat{j}) \text{ N}$$

The force that the electron experiences is $\vec{F} = (1.80 \times 10^{-17} \hat{i} + 1.60 \times 10^{-17} \hat{j}) \text{ N}$.

Question 3

a)

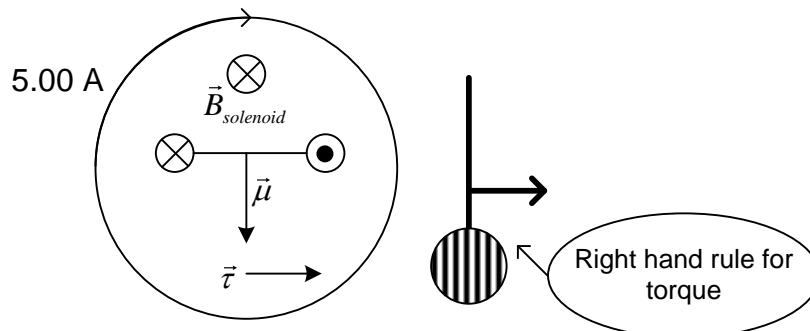

b) $B = \mu ni = 4\pi \times 10^{-7} \times \frac{40}{10^{-2}} \times 5$

The magnetic field inside a solenoid is: $B = -0.025 \hat{k} \text{ T}$

$$c) \vec{\tau} = \vec{\mu} \times \vec{B} = |\vec{\mu}| |\vec{B}| \sin \theta \hat{i}$$

$$\vec{\tau} = NIA(0.025) \sin 90 \hat{i}$$

$$\vec{\tau} = 1 \times 0.25 \times (3 \times 10^{-2})^2 \times 0.025 \times \sin 90 \hat{i}$$

The torque on the loop is $\vec{\tau} = 5.63 \times 10^{-6} \hat{i} \text{ N} \times \text{m}$

Question 4

$$\phi_{\text{initial}} = \vec{B} \times \vec{A} = BA \cos \theta$$


$$\phi_{\text{initial}} = 6 \times \pi \times 0.1^2$$

$$\phi_{\text{initial}} = 0.188 \text{ Tm}^2$$

$$\phi_{\text{final}} = 0 \text{ Tm}^2$$

$$\varepsilon = \frac{\Delta \phi}{\Delta t} = \frac{\phi_{\text{final}} - \phi_{\text{initial}}}{\Delta t} = \frac{0.188 \text{ Tm}^2}{0.1 \text{ s}}$$

The induced emf is $\varepsilon = 1.88 \text{ V}$ and the direction of the current is indicated on the picture

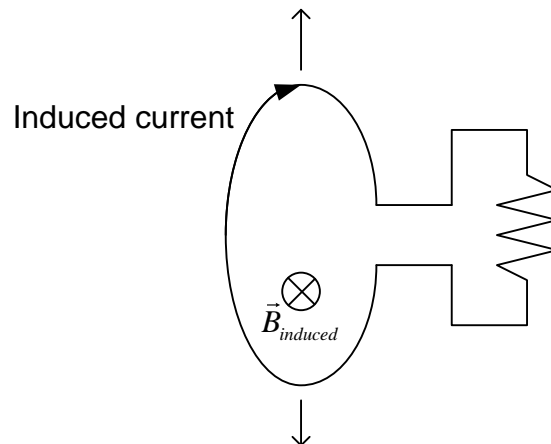

Question 5

a)

$$B_{\text{solenoid}} = \mu_0 n I$$

$$(\text{Flux through solenoid}) = (B_{\text{solenoid}})(A_{\text{solenoid}})$$

$$\Delta \phi_{\text{solenoid}} = \phi_{\text{final}} - \phi_{\text{initial}}$$

$$\Delta \phi_{\text{solenoid}} = A \mu_0 n (I_F - I_i)$$

$$\Delta \phi_{\text{solenoid}} = \pi (0.06)^2 (4\pi \times 10^{-7}) (5 \times 10^4) (20 - 50)$$

$$\Delta \phi = -0.0213 \text{ Wb}$$


$\Delta \phi_{\text{pick up coil}} = \Delta \phi_{\text{solenoid}}$ (There are essentially no field lines due to the solenoid outside of the solenoid, assuming it is ideal)

$$|\varepsilon_{\text{av coil}}| = \left| N \frac{\Delta \phi}{\Delta t} \right| = 200 \frac{0.0213}{0.3} = 14.2 \text{ V}$$


The average induced emf in the pick-up coil is 14.2 V

$$b) I = \frac{\varepsilon}{R} = \frac{14.2}{57} = 0.249 \text{ A}$$

The magnitude of the current is 0.249 A and the direction of the current is indicated is indicated on the picture.

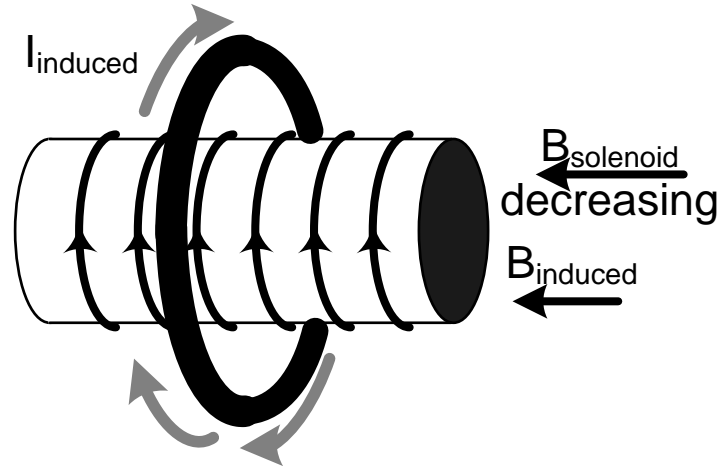

Question 6

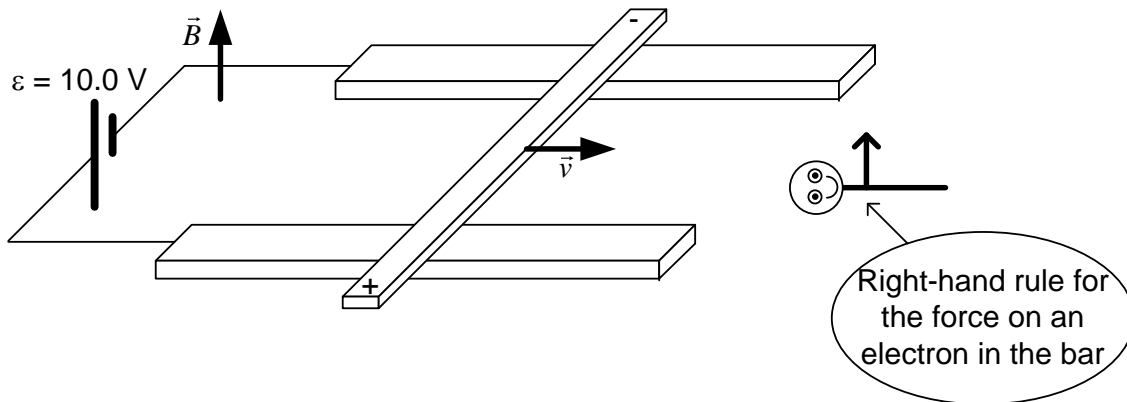


a) The direction of the induced emf is shown on the picture ED shows the right hand rule for the force on an electron in the bar.

$$\varepsilon = B\ell v$$

$$\varepsilon = 2 \times 3 \times 10^{-2} \times 30 = 1.80 \text{ V}$$

The induced emf in the moving bar is 1.80 V

b) Let's draw a circuit equivalent to the picture of the situation:

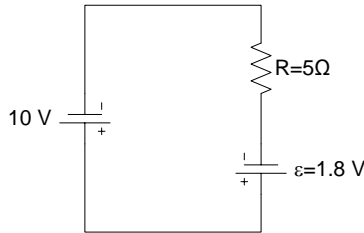

Let's apply the loop rule $10 - 1.8 - 5 \times I = 0$

$$10 - 1.8 - 5 \times I = 0 \rightarrow I = \frac{8.2}{5} \rightarrow I = 1.64 \text{ A}$$

The current in the rails is 1.64 A counter-clockwise


c) $F_B = I \ell B \sin \theta = 1.64 \times 3 \times 10^{-2} \times 2 \times \sin 90 = 9.84 \times 10^{-2} \text{ N}$

by the right hand rule F_B points to the right

If the bar moves with a constant speed (zero acceleration), the net force applied to it must be zero: $\vec{F}_{net} = \vec{F}_B + \vec{F}_{applied} = 0$

So the applied force must be $9.84 \times 10^{-2} \text{ N}$ to the left

Question 7

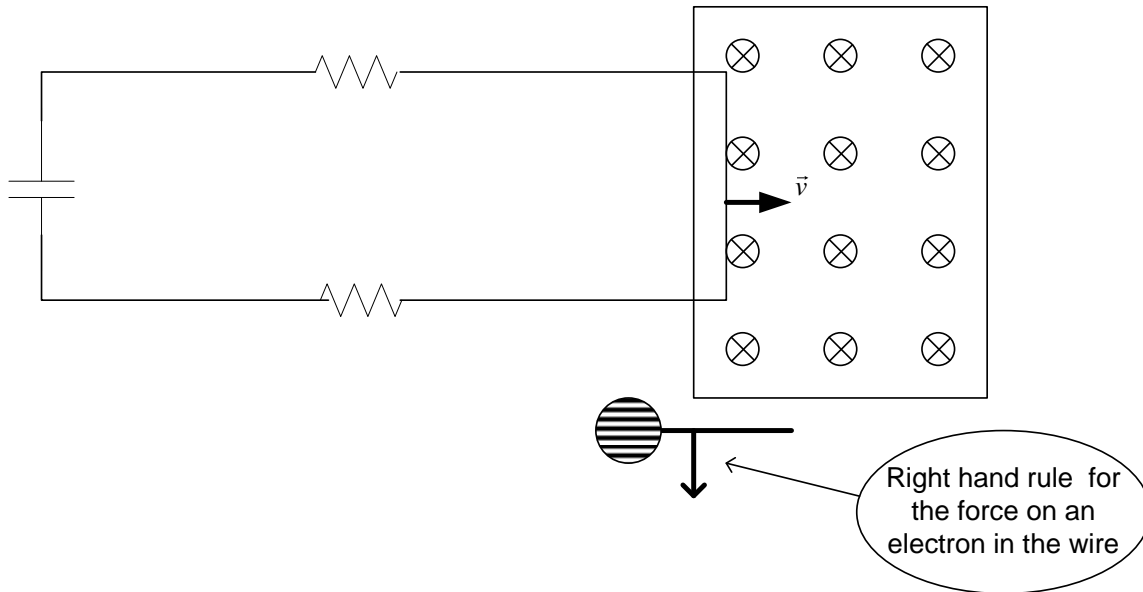


a) $\varepsilon = B \ell v$

$$\varepsilon = 1.5 \times 0.25 \times 0.04 = 0.015 \text{ V}$$

The induced emf just after $t=0$ is 0.015 V

The induced magnetic field will oppose the increase of magnetic flux into the page. The induced magnetic field will be out of the page and the induced current will be counter-clockwise

At $t=0$ the capacitor carries no charge so $V_C = 0$ V.

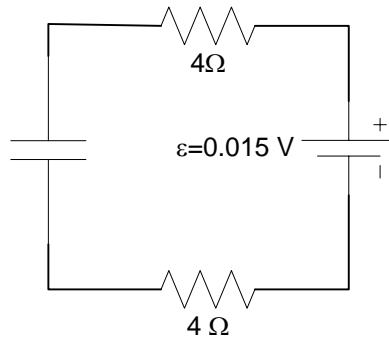

We can apply the loop rule to the circuit.

$$-I_{ind}R + \mathcal{E}_{ind} - I_{ind}R = 0$$

$$I_{ind} = \frac{\mathcal{E}_{ind}}{2R} = \frac{0.015}{8} = 1.88 \times 10^{-3} \text{ A}$$

The induced current is 1.88 mA

b) at $t=2$ s, the induced emf is the same but there is charge on the capacitor, so we must now use:

$$I = I_0 e^{-\frac{t}{RC}}$$

$$I = 1.88 \times 10^{-3} e^{-\frac{2}{8 \times 0.5}} = 1.14 \times 10^{-3} \text{ A}$$

At $t=2$ s the magnitude of the current in the circuit is 1.14 mA

$$c) \vec{F} = I \vec{\ell} \times \vec{B}$$

$$\vec{F} = 1.14 \times 10^{-3} \times 0.25 \times 1.5 \times \sin 90$$

$$\vec{F}_B = -4.28 \times 10^{-3} \hat{i} \text{ N}$$

The external force must therefore be : $\vec{F}_{ext} = 4.28 \times 10^{-3} \hat{i} \text{ N}$ for the velocity to be constant

d) The capacitor has been charging with the induced emf of 0.015V for 4s.

$$Q = C\mathcal{E} \left(1 - e^{-\frac{t}{RC}} \right)$$


$$Q = (0.5)(0.015) \left(1 - e^{-\frac{4}{8 \times 0.5}} \right)$$

$$Q = 4.74 \times 10^{-3} \text{ C}$$

$$C = \frac{Q}{V} \rightarrow V = \frac{Q}{C} \rightarrow V = \frac{4.74 \times 10^{-3}}{0.5} = 9.48 \times 10^{-3} \text{ V}$$

The voltage across the capacitor at $t=4$ s is 9.48 mV

e) At $t = 4\text{ s}$, the right end of the loop exits the magnetic field. Between $t = 4\text{ s}$ and $t = 8\text{ s}$, the magnetic flux is constant (think about it, the amount of magnetic field through the loop stays the same) the induced emf is now 0 and so the capacitor discharges!!!!

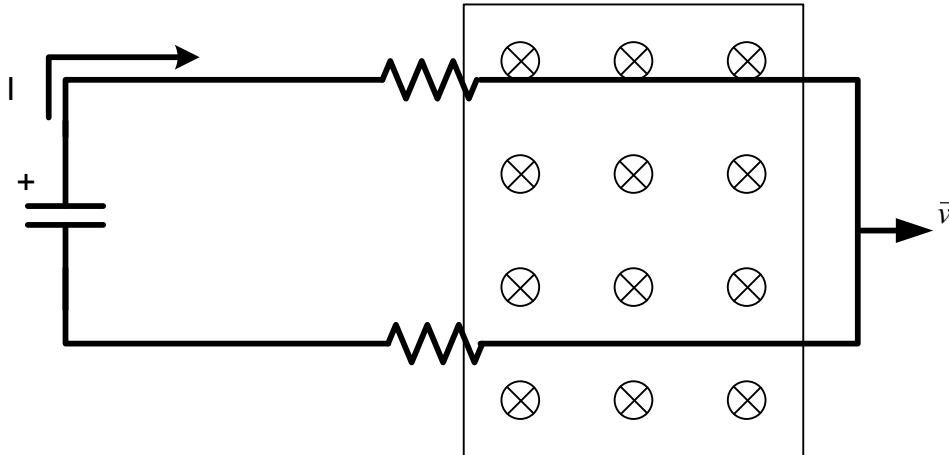

$$I = I_0 e^{-\frac{t}{RC}}$$

$$I = \frac{V_0}{R} e^{-\frac{t}{RC}}$$

$$I = \left(\frac{9.48 \times 10^{-3}}{8} \right) e^{-\frac{4}{8 \times 0.5}}$$

$$I = 4.36 \times 10^{-4} \text{ A}$$

The current in the loop is 0.436 mA and the current circulates clockwise.