

PROBLEM SET 2
TRAVELLING WAVES AND STANDING WAVES

Part A

1. C
2. A
3. A
4. $v_w = \frac{\lambda}{T} = \frac{4m}{0.5s} = 8m/s$ A
5. C
6. B
7. C
8. E
9. Longer length, same speed
10. a) bigger T (tension); higher speed
b) bigger μ ; lower speed
11. Both waves start at the same time. P waves gets to detector first. The difference in arrival time will determine the distance to the epicentre.


$$\Delta t = t_s - t_p = \frac{d}{v_s} - \frac{d}{v_p} = d \left(\frac{v_p - v_s}{v_s v_p} \right)$$

$$d = \Delta t \left(\frac{v_s v_p}{v_s - v_p} \right) = 7.5 \Delta t \quad \text{for the number of seconds given}$$

One station: epicentre somewhere on surface of sphere of radius d centered at the station.

Two centers: intersection of 2 spheres in the arc of a circle

Three centers: intersection of 3 spheres is one point = epicentre

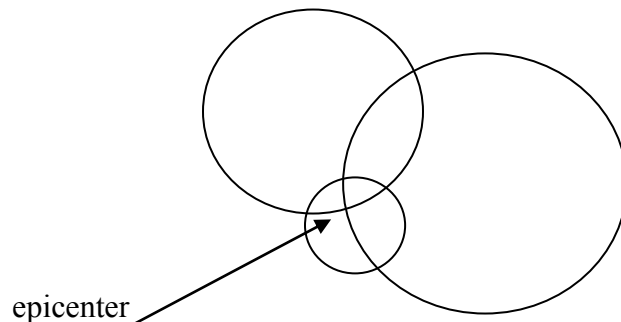

Part B

1. $t_{\text{tot}} = 2.2$ seconds: time for the stone to fall a distance d + time for sound to travel distance d

From kinematics equations:

$$d = \frac{1}{2}at_1^2 \quad v_{\text{sound}} = \frac{d}{t_2}$$

$$\frac{1}{2}at_1^2 = v_{\text{sound}}t_2 \quad \text{but} \quad t_2 = 2.2 - t_1$$

$$\frac{1}{2}(9.8)t_1^2 = 340(2.2 - t_1)$$

$$4.9t_1^2 + 340t_1 - 748 = 0$$

Using the quadratic equation to solve for t_1 :

$$t_1 = \frac{-340 \pm \sqrt{340^2 - 4(4.9)(-748)}}{2(4.9)} = 2.134s \quad \text{ignore the negative root}$$

$$d = \frac{1}{2}at_1^2 = \frac{1}{2}(9.8)(2.134)^2 = 22.3m$$

2. a) The wavelength of a wave depends on the frequency and the speed

$$v_w = f\lambda \Rightarrow \lambda = \frac{v_w}{f} = \frac{345}{262} = 1.32m$$

b) A phase change of 90° corresponds to one-quarter of a period.

$$t = \frac{1}{4}T = \frac{1}{4f} = \frac{1}{2(262)} = 9.54 \times 10^{-4}s$$

c) We know that $1\lambda \leftrightarrow 2\pi\text{rad}$

$$\frac{6.4\text{cm}}{132\text{cm}} = \frac{\Delta\phi}{2\pi} \Rightarrow \Delta\phi = \frac{2\pi(6.4)}{132} = 0.305\text{rad}$$

d) To find the equation of the wave, we need the amplitude, the wave number, the angular frequency and the phase.

$$\begin{aligned} X &= 0.02\text{cm} \\ k &= \frac{2\pi}{\lambda} = 4.76\text{rad/m} \\ \omega &= 2\pi f = 1650\text{rad/s} \end{aligned}$$

at $t = 0$ and $x = 0$; phase $\frac{3\pi}{2}$ (for sine wave.... What would it be for cosine wave? Try it!)

The horizontal displacement from equilibrium position:

$$s(x, t) = 0.02 \sin(4.76x \mp 1650t + \frac{3\pi}{2})$$

Note that the sign is $-$ is the wave travels to the right and $+$ is the wave travels to the left.

3. a) According to the wave equation, the amplitude is $0.001m$

b) the wavelength depends on the wave number

$$k = \frac{2\pi}{\lambda} \Rightarrow \lambda = \frac{2\pi}{k} = \frac{2\pi}{62.8} = 0.100m$$

c) $k = 62.8rad/m$

d) the frequency is related to the angular frequency:

$$\omega = 2\pi f \Rightarrow f = \frac{\omega}{2\pi} = \frac{314}{2\pi} = 50.0Hz$$

e) The speed does not depend on the frequency nor the wavelength:

$$v_w = f\lambda = 50 \times 0.1 = 5.00m/s$$

$$\text{or } v_w = \frac{\omega}{k} = 5.00m/s$$

f) left because of the $-x$

g) The transverse velocity and the wave speed are two distinct things; make sure that you know the difference.

$$v_y = \frac{dy}{dt} = 314 \times (0.001) \cos(62.8x + 314t)$$

$$v_y = 314 \times (0.001) \cos(62.8(0.05) + 314(1.2)) = -0.308 \text{ m/s}$$

4. According the standing wave equation:

a) The amplitude of the standing wave: $2X = 0.50\text{cm}$

Therefore, the amplitude of the individual wave: 0.25cm

The speed can be obtain from the wave number and angular frequency

$$v_w = \frac{\omega}{k} = \frac{500}{0.025} = 2 \times 10^4 \text{ cm/s} = 200\text{m/s}$$

b) The frequency is related to the angular frequency:

$$\omega = 2\pi f \Rightarrow f = \frac{\omega}{2\pi} = 79.6\text{Hz}$$


The wavelength is related to the wavenumber:

$$k = \frac{2\pi}{\lambda} \Rightarrow \lambda = \frac{2\pi}{k} = 251\text{cm}$$

c) Internode distance always corresponds to $\frac{1}{2}\lambda = 126\text{ cm}$

d) We have one end fixed (thus a node) and one end free (thus an antinode).

The shortest scenario that fits this looks like a quarter wavelength thus: $\frac{126}{2} = 63\text{cm}$



e) The maximum displacement occurs when $\cos(\omega t) = \cos(500t) = 1$

$$X_{0,30} = 0.5 \sin[(0.025)(30)][1] = 0.341\text{cm}$$

5. a) The speed depends only on the force and density:

$$v_w = \sqrt{\frac{F_T}{\mu}} = \sqrt{\frac{16}{2.5 \times 10^{-2}}} = 25.3\text{m/s}$$

We can find the period and frequency from the speed equation and from the graph where the wavelength is found:

$$v_w = f\lambda = \frac{\lambda}{T} \Rightarrow T = \frac{\lambda}{v_w} = \frac{4}{25.3} = 0.158\text{s}$$

$$f = \frac{1}{T} = 6.32\text{Hz}$$

b) We can find the transverse velocity from the wave equation

$$y = X \sin(kx - \omega t)$$

$$v_y = \frac{dy}{dt} = -\omega X \cos(kx - \omega t)$$

$$v_{y_{\max}} = \omega X = 2\pi fX = 2\pi(6.32)(2) = 79.4 \text{ cm/s}$$

c) The wave equation is found given the wave number, the angular frequency, the phase and the amplitude.

$$k = \frac{2\pi}{\lambda} = \frac{2\pi}{4} = \frac{\pi}{2} \text{ rad/m} \quad \omega = 2\pi f = 39.7 \text{ rad/s}$$

$$X = 0.02 \text{ m} \quad \phi = 0$$

the wave travels to the right, therefore, we use the $-$ sign:

$$y = X \sin(kx - \omega t)$$

$$y = 0.02 \sin\left(\frac{\pi}{2}x - 39.7t\right)$$


d) at $t = 0$, and $x = 0$, the wave is $\frac{3}{4}$ the way through a cosine function. So the phase is $\phi = -\frac{\pi}{2} = \frac{3\pi}{2}$. Therefore, the wave function is also:

$$y = 0.02 \cos\left(\frac{\pi}{2}x - 39.7t + \frac{3\pi}{2}\right)$$

e) The average power is giving by:

$$P = \frac{1}{2} \mu \omega^2 X^2 v_w = \frac{1}{2} (0.025)(39.7)^2 (0.02)^2 (25.3) = 0.199 \text{ W}$$

6.

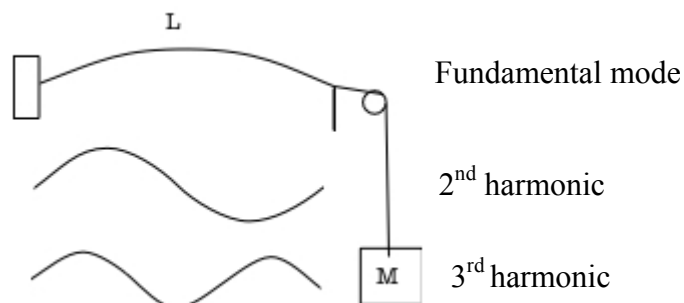

a) In the fundamental mode: $L = \frac{1}{2} \lambda$

$$\lambda = 3.0m \quad f = 60Hz$$

$$v_w = f \lambda = 180m/s$$

$$v_w = \sqrt{\frac{F_T}{\mu}} \Rightarrow F_T = v_w^2 \mu = (180)^2 (8 \times 10^{-4}) = 25.9N$$

b) 2nd harmonic: $L = \lambda$

$$\lambda = 1.5m$$

$$v_w = f \lambda = 90m/s$$

$$F_T = v_w^2 \mu = (90)^2 (8 \times 10^{-4}) = 6.48N$$

More directly: velocity halved $\rightarrow F_T$ reduced to $\frac{1}{4}$ original

c) 3rd harmonic: $L = \frac{3}{2} \lambda$

$$\lambda = 1m$$

$$v_w = f \lambda = 60m/s$$

$$F_T = v_w^2 \mu = (60)^2 (8 \times 10^{-4}) = 2.88N$$

F_T is $\frac{1}{9}$ F_T fundamental

7. a) The speed $v_w = \sqrt{\frac{F_T}{\mu}} = \sqrt{\frac{720}{5 \times 10^{-2}}} = 120m/s$

b) $n f_0 = 280 \text{ Hz}$ and $(n+1) f_0 = 350$


Therefore, $f_0 = 70\text{Hz}$

280Hz corresponds to $n = 4$

350Hz corresponds to $n = 5$

c) 70 Hz (found in b))

d)



$$v_w = f \lambda \Rightarrow \lambda = \frac{v_w}{f} = \frac{120}{70} = 1.71m$$

$$L = \frac{1}{2} \lambda = \frac{1}{2} (1.71m) = 0.857m$$

e)



→
 $1/6L = 0.143m$

$$y = X \sin kx \cos \omega t$$

max=1

$$k = \frac{2\pi}{\lambda} = \frac{2\pi}{0.857} = 7.33rad / m$$

$$y_{\max} = 4 \sin [(7.33)(0.143)] = 3.47cm$$