

ASSEMBLY INSTRUCTIONS

(For LD17863-21)

WARNING!

○ If cushion gets wet, hang over chair to dry to prevent mold/mildew.





ATTENTION:

1. Please read these instructions carefully before assembly.
2. Since aluminum is soft metal over tightening may strip thread or break the part.
3. DO NOT use power tools.

Assembly steps:

1. Loosely attach the chair(A) to the arms(B&B1) with bolt(E&F&G), flat washers(E1&G1) lock washer(E2&G2), lock nut(H) and PVC cover(J), Nut cap(I).
DO NOT tighten the nuts.
2. Turn the chair onto its legs and put the cushion on (D&D1)then it is ready to use.

Warning : Do not use acid or alkaline washing liquid to clean the product.

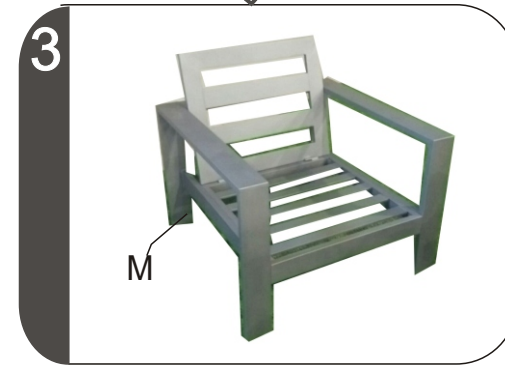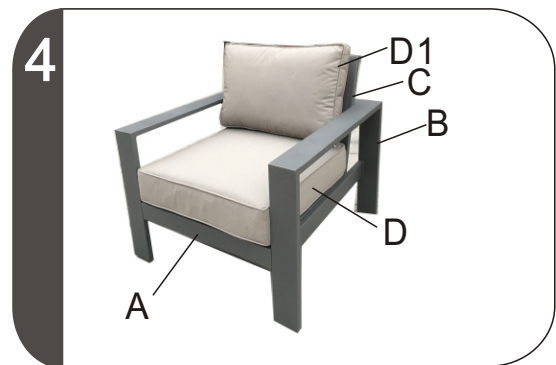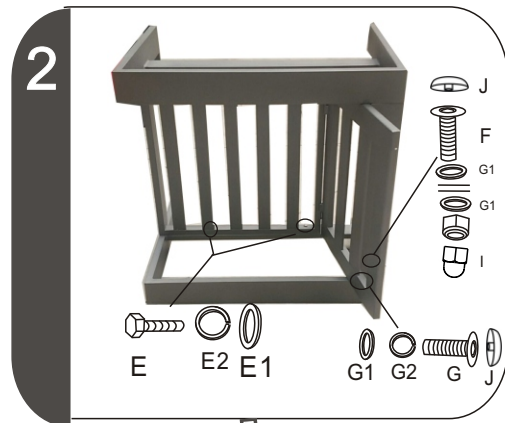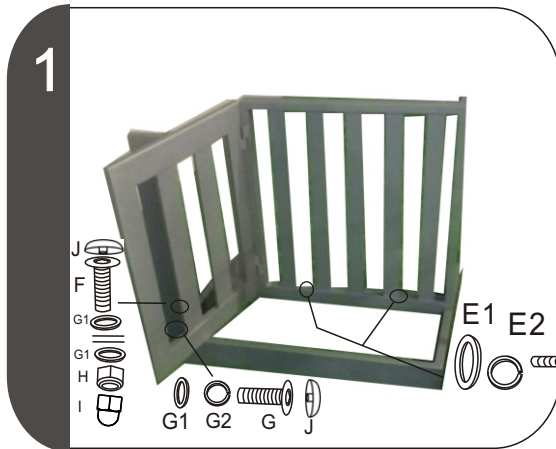

Parts list	Parts picture	Description	Q'ty	Parts list	Parts picture	Description	Q'ty
A		Chair	1	E		Bolt (M8*35)	4
B		Left arm	1	E1		Large flat washer	4
B1		Right arm	1	E2		Large lock washer	4
C		After Connecting Pipe	1	F		Bolt (M6*30)	2
D		Seat cushion	1	G		Bolt (M6*15)	2
D1		Back cushion	1	G1		Small flat washer	6
				G2		Small lock washer	2
				H		Lock nut	2
				I		Nut cap	2
				J		PVC cover	4
				K		Wrench	1
				L		Wrench	1
				M		PE cap	1

Made in China

* DO NOT OVER TIGHTEN

* NO POWER TOOLS

* NO SOCKET DRIVERS

