

| Model                             | Temperature   | Dimension                                   | Volume | Weight | Refrigerant | Power   |
|-----------------------------------|---------------|---|--------|--------|-------------|---|
| <b>SUR-1261HP(E)</b><br>(CHILLER) | -6°C ~ +12°C  | Ext: W1200xD600xH800<br>Int: W794xD437xH573 | 214 L  | 78kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 380W (50Hz) |
| <b>SUR-1271HP(E)</b><br>(CHILLER) | -6°C ~ +12°C  | Ext: W1200xD750xH800<br>Int: W794xD587xH573 | 280 L  | 84kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 380W (50Hz) |
| <b>SUF-1271HP(E)</b><br>(FREEZER) | -25°C ~ -15°C | Ext: W1200xD750xH800<br>Int: W794xD587xH573 | 280 L  | 84kg   | R404A       | <b>Cooling:</b><br>220V / 382W (50Hz)<br><b>Defrosting:</b><br>220V / 395W (50Hz) |

## Design Features



### Stable Temperature Range


Refrigerator  
-6°C to 12°C

Freezer  
-25°C to -15°C

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**

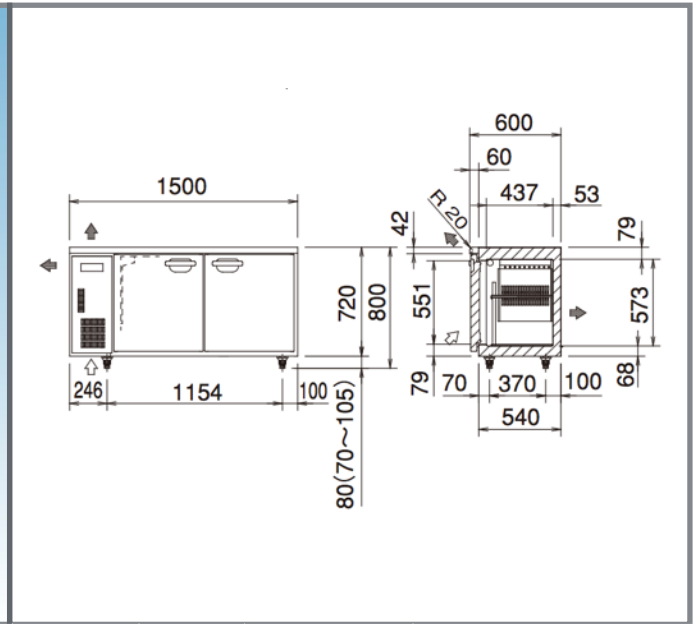

| Model                             | Temperature  | Dimension                                    | Volume | Weight | Refrigerant | Power   |
|-----------------------------------|--------------|--|--------|--------|-------------|---|
| <b>SUR-1561HP(E)</b><br>(CHILLER) | -6°C ~ +12°C | Ext: W1500xD600xH800<br>Int: W1094xD437xH573 | 296 L  | 86kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 390W (50Hz) |
| <b>SUR-1571HP(E)</b><br>(CHILLER) | -6°C ~ +12°C | Ext: W1500xD750xH800<br>Int: W1094xD587xH573 | 393 L  | 95kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 390W (50Hz) |

## Design Features



### Stable Temperature Range


Refrigerator  
**-6°C to 12°C**

Freezer  
**-25°C to -15°C**

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**

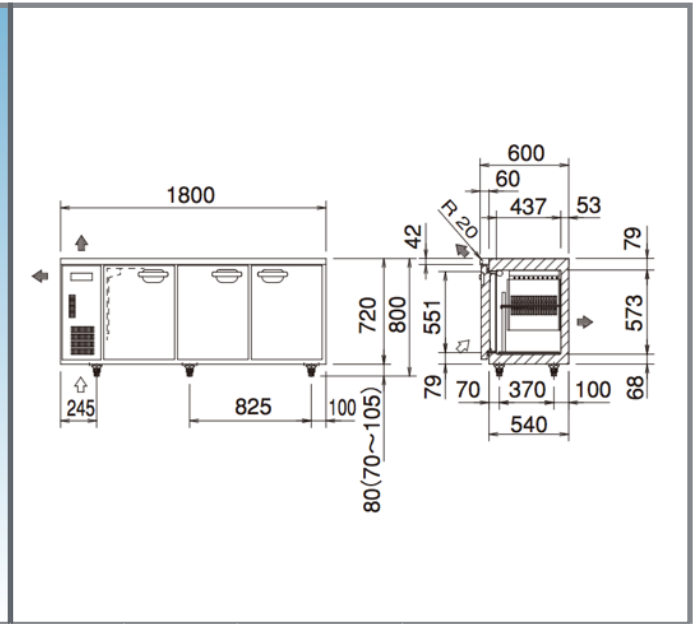

| Model                             | Temperature  | Dimension                                    | Volume | Weight | Refrigerant | Power   |
|-----------------------------------|--------------|--|--------|--------|-------------|---|
| <b>SUR-1861HP(E)</b><br>(CHILLER) | -6°C ~ +12°C | Ext: W1800xD600xH800<br>Int: W1394xD437xH573 | 377 L  | 99kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 410W (50Hz) |
| <b>SUR-1871HP(E)</b><br>(CHILLER) | -6°C ~ +12°C | Ext: W1800xD750xH800<br>Int: W1394xD587xH573 | 495 L  | 110kg  | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 410W (50Hz) |

## Design Features



### Stable Temperature Range


Refrigerator  
-6°C to 12°C

Freezer  
-25°C to -15°C

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**

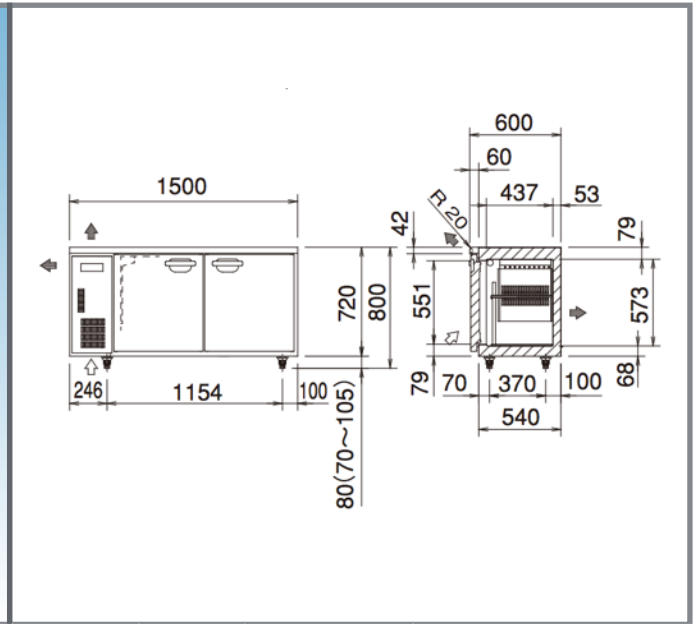

| Model                             | Temperature   | Dimension                                    | Volume | Weight | Refrigerant | Power   |
|-----------------------------------|---------------|--|--------|--------|-------------|---|
| <b>SUR-1561HP(E)</b><br>(CHILLER) | -6°C ~ +12°C  | Ext: W1500xD600xH800<br>Int: W1094xD437xH573 | 296 L  | 86kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 390W (50Hz) |
| <b>SUR-1571HP(E)</b><br>(CHILLER) | -6°C ~ +12°C  | Ext: W1500xD750xH800<br>Int: W1094xD587xH573 | 393 L  | 95kg   | R134A       | <b>Cooling:</b><br>220V / 293W (50Hz)<br><b>Defrosting:</b><br>220V / 390W (50Hz) |
| <b>SUF-1571HP(E)</b><br>(FREEZER) | -25°C ~ -15°C | Ext: W1500xD750xH800<br>Int: W1094xD587xH573 | 393 L  | 105kg  | R404A       | <b>Cooling:</b><br>220V / 389W (50Hz)<br><b>Defrosting:</b><br>220V / 620W (50Hz) |

## Design Features



### Stable Temperature Range

Refrigerator  
**-6°C to 12°C**

Freezer  
**-25°C to -15°C**

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**