



Silver Plus Series 180° Area Light 95w

DESCRIPTION:

Touch-Plate's 180° Area Lights were designed to offer better security, more lumens, and higher cost savings. Our 180° Area Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for retrofitting canopy lights, wall packs and area lights.

PRODUCT FEATURES:


- Built-in cooling heatsink
- No flickering or humming
- Built-in driver
- Lifetime of 50,000 hrs or greater
- UL Listed (E474059)
- DLC Listed
 - SNC-CLH-95w1A1
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 95w
- Lumens: 11,400lm (approx >120lm/w)
- Lighting Equivalent: 200w CFL/250w MHL/HPS/HID
- CRI: >80Ra
- IP Rating: IP51
- LED Chips: Philips Lumileds 3030 2D
- PF: >0.9
- Lens: Clear PC

PHYSICAL PARAMETERS:

- Dimensions
 - Width: 5.43"
 - Depth: 3.43"
 - Length: 11.69" (E39)
- Weight
 - 2.71 lbs

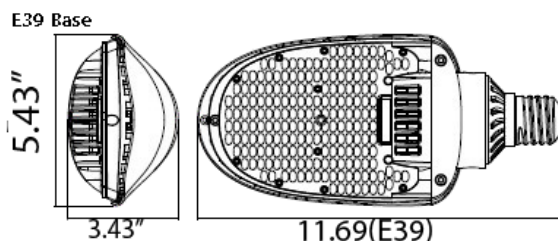



Silver Plus 180° Area Light

ORDERING GUIDE

LED Type XXX -	Lumens - Wattage XXX - XXX-	CCT XX	Voltage X -	Base X
<ul style="list-style-type: none"> 18A 180° Area Light 	<ul style="list-style-type: none"> 144-095 11,400lm - 95w 	<ul style="list-style-type: none"> 40 4000k 50 5000k 57 5700k 	<ul style="list-style-type: none"> U 100-277v 	<ul style="list-style-type: none"> 3 E39

ADDITIONAL ORDERING OPTIONS

(specified at time of order)


Color

- Black (Standard)

Beam Angle

- 90°
- 150°(Standard)

PHOTOMETRIC

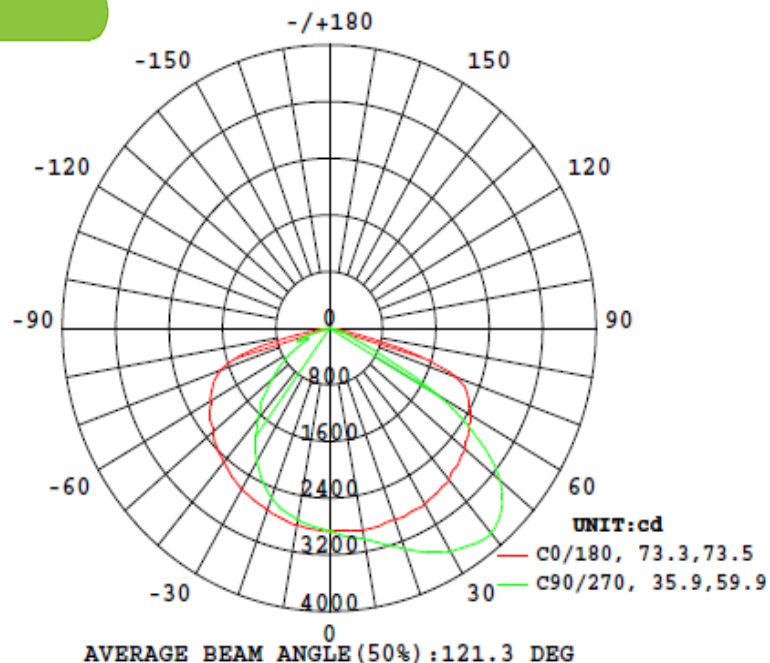

Silver Plus Series 180° Area Light

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Bypass the ballast by making the necessary 'HOT' (Black or Brown) , 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.
- Turn the bulb into the light socket.
- Once tightened adjust the position of the bulb so the light is shining out of the housing.

INSTALLATION INFORMATION

