







Unit: mm




# INSTALLATION MANUAL

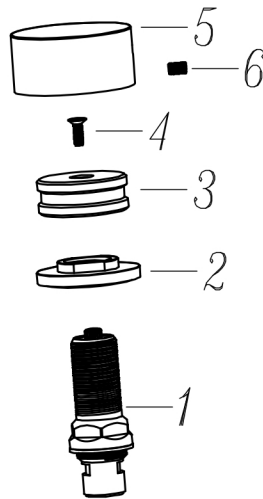


| NO | name          | QTY |
|----|---------------|-----|
| 1  | Cartridge     | 2   |
| 2  | Decorate cup  | 2   |
| 3  | Handle base   | 2   |
| 4  | Screw         | 2   |
| 5  | Handle        | 2   |
| 6  | Hexagon screw | 2   |
| 7  |               |     |
| 8  |               |     |
| 9  |               |     |
| 10 |               |     |
| 11 |               |     |
| 12 |               |     |
| 13 |               |     |

2

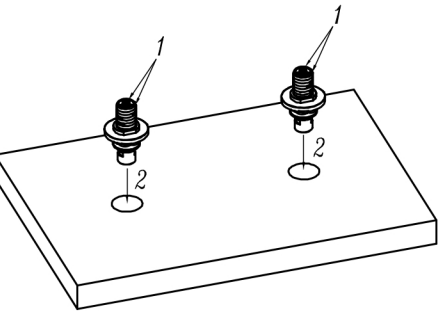


1. Make the suitable length.  
2. Make the hole first, then put the cartridge into the hole and install the body.

3

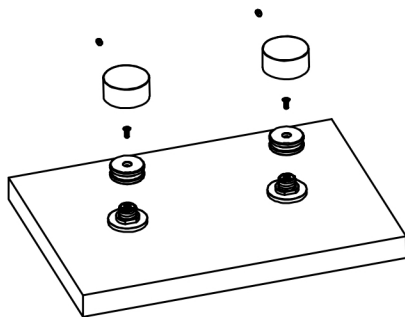

1. Tighten the screw after installed handle base  
2. install the handles and tighten the screw.

4

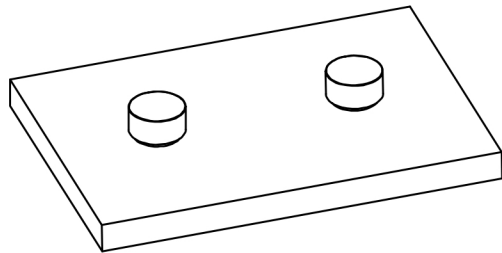

1. complete.  
notes:  
1. Working pressure: 0.05-1MPa  
2. Working temperature: 1 - 55°C  
3. product is to be installed in accordance with AS/NZS3500.1  
4. The flow controller incorporated in the outlet is tightened to prevent removal by hand