




Temperature
4-15°C

HCFC
FREE

● This picture is for reference.

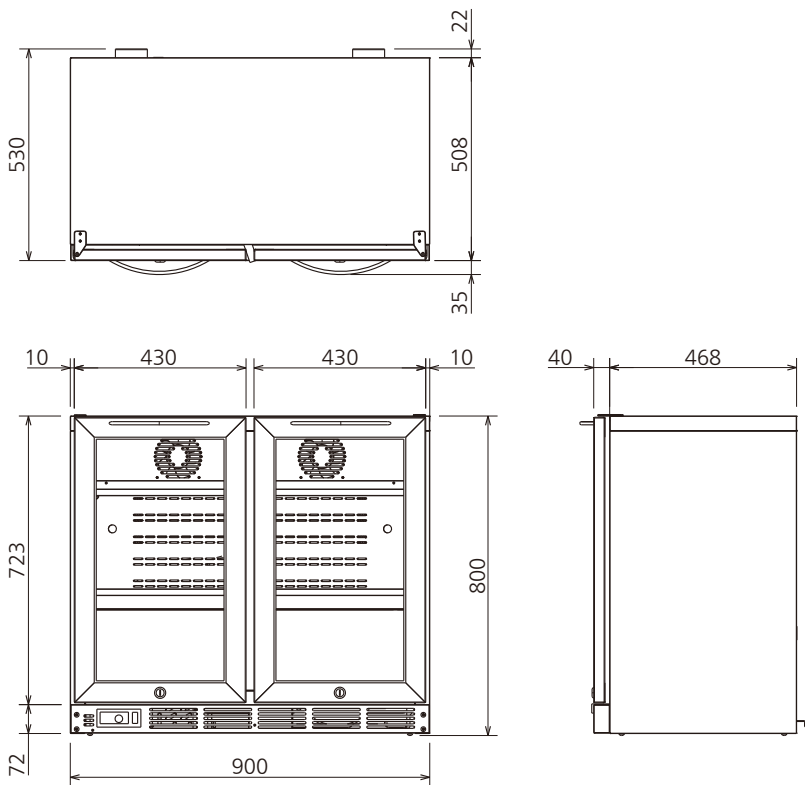

● Note: Design and specifications subject to change without prior notice.

MODEL		BR-2U		
Dimensions	Width	900	530	800
	Out-side	900	530	800
	In-side	820	378	645
CABINET	Exterior	Front : Glass Exterior : Stainless steel plate		
	Door	Aluminum frame glass door		
	Interior	Stainless steel plate		
	Shelf	White painted steel shelf		
	Insulation	Hard cyclopentane foam		
PERFORMANCE	Temperature range usable	Ambient temp 30°C, humidity 70% without direct sunlight		
	Internal temp	4~15°C		
	Temperature setting range	4~10°C		
REFRIGERATION SYSTEM	Compressor	Embraco EMS6170Z		
	Condenser	Fin Tube, Forced-air Cooling.		
	Evaporator	Fin Tube, Forced-air Cooling.		
	Refrigerant	R134A 190g		
	Fan	For cooling : 220V, 44W For Condenser : 220V, 7W		
	Thermometer control	Microcomputer control		
	Defrost	12 hour cycle, Off-cycle defrost		
	Internal light	14W		
ELECTRICITY	Power	220V, 1-phase, 50Hz		
	Energy consumption	Cooling 385W		
	Power cable	Cable length: 2.0m		
POWER	Adoptable Plug	Category D : 10A 250V ground wire		
	Adjustable leg	M8X20		
	Accessories	White painted steel shelf x 4		
Effective capacity		133L		
Weight		90kg		

Distributed by: