

2T5 Linear
4ft
30w



DESCRIPTION:

Touch-Plate's 2T5 Linear Lights were designed to offer better security, more lumens, and higher cost savings. Our 2T5 Linear Lights can offer energy savings of 70% or greater over traditional lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Aluminum Body Frame
- Flicker Free
- Linkable design
- Multiple Mounting Options
- Lifetime of 50,000 hrs or greater
- UL Listed (E471267)
- DLC Listed
 - LY-T5SL1200-30w
- 5 Year Limited Warranty
- Power Cord: 1ft/25cm
- Connection Cable: 1ft/25cm
- Small Connector
- Mounting Clips
- Mounting Screws

SPECIFICATIONS:

- Wattage: 30w
- Lumens: 3,000 (approx > 100lm/w)
- Lighting Equivalence: 90w Florescence
- IP Rating: IP40
- LED Chips: 2835
- PF: >0.95

PHYSICAL PARAMETERS:

- Dimensions
 - Length: 45.24"
 - Depth: 1.42"
 - Width: 1.61"
- Weight
 - 2.30 lbs

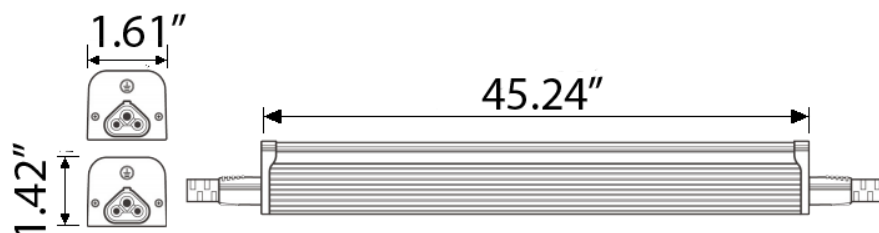



2T5 Linear

ORDERING GUIDE

LED Type XXXX -	Lumens - Wattage XXX - XXX-	CCT XX	Voltage X
<ul style="list-style-type: none"> 2T54 Linear Light 4ft 	<ul style="list-style-type: none"> 030-030 3,000lm - 30w 	<ul style="list-style-type: none"> 35 3500k 40 4000k 45 4500k 50 5000k 	<ul style="list-style-type: none"> U 100-277v

ADDITIONAL ORDERING OPTIONS

(specified at time of order)

Lens Options


- Clear Alum/PC
- Milky Alum/PC

ACCESSORIES

(specified at time of order)

- Stainless Steel Cable: 2ft/.5m, 3ft/1m, 7ft/2m, 10ft/3m, or 20ft/6m
- No Plug Extension: 3ft/1m or 10ft/3m
- 3 Prong Plug: 7ft/2m
- S Hook Clip: Medium or Large
- Stainless Steel Magnetic 'O' Hook
- 3 Pin Splice Connector
- Non-Dimmable On/Off Switch

PHOTOMETRIC

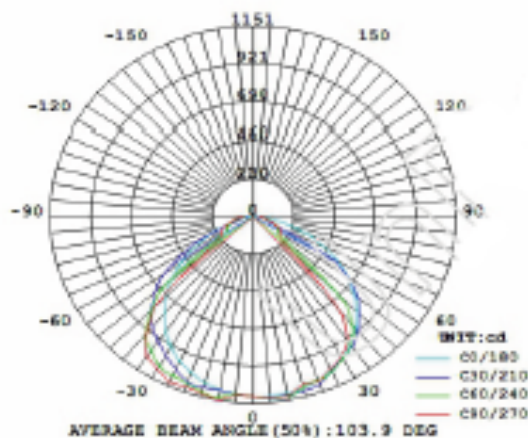

2T5 Linear


INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- 2T5 Linear can be ordered with a specified twist lock plug or without a plug.
- Plug in the 2T5 Linears or make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

INSTALLATION INFORMATION

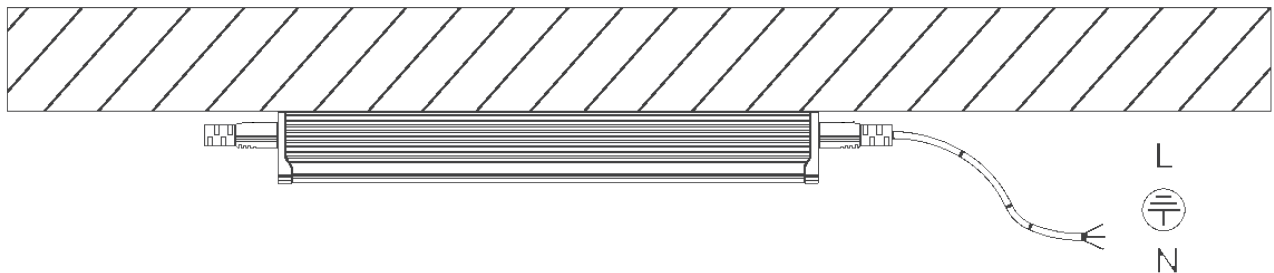

- Drill a hole to place the plastic wall anchor.
- Drive the wall anchor into the hole using a rubber mallet.
- Screw the clip to the wall anchor using a screwdriver.
- Affix the T5 Linear LED fixture into the clip.

