



SHOWER COLUMN NSTALLATION GUIDE
TECHNICAL SPECIFICATIONS
Operating Pressure:
Min water pressure 150kpa
Max water pressure 500kpa
The shower is suitable for 150kpa to 500kpa Recommended installation of a pressure limiting valve if supply exceeds 500kpa heaters, lower and unequal pressure supply networks, instantaneous water heaters, tempering valve and thermostatic mixing valve
Operating Temperature: Max 70°C
WARRANTY
Products Warranty
5 years on manufactured components
Shower will within in the stated period from invoice at its option, repair or replace the faulty product or assembly to Shower satisfaction. This guarantee will not apply if any product fault is caused by improper use, improper Installation Installation shall be in accordance with the AS/NZS3500 series of Standards.


Model No:31053-2
DRAWING Unit:mm

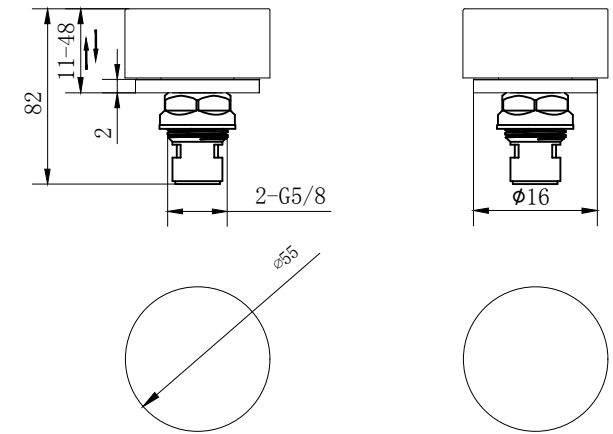


1 INSTALLATION
MANUAL Name:Shwer mixer

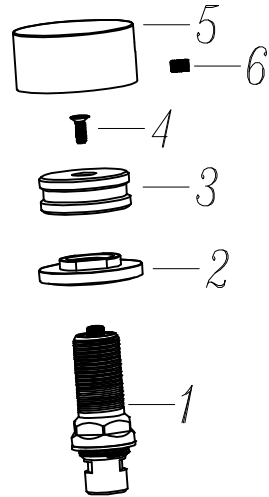


NO	name	QTY
1	Cartridge	2
2	Decorate cup	2
3	Handle base	2
4	Screw	2
5	Handle	2
6	Hexagon screw	2
7		
8		
9		
10		
11		
12		
13		

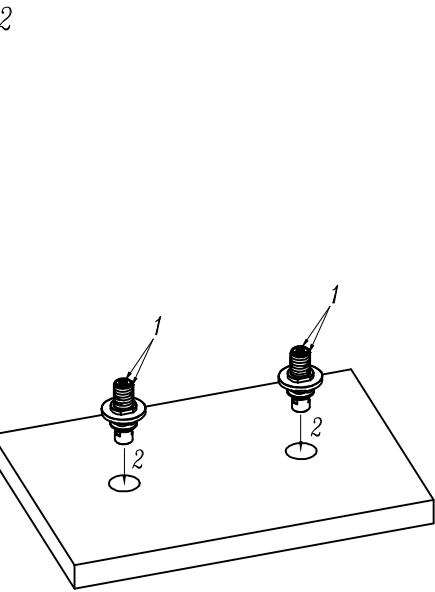

1.Make the Suitable length.
2.Make the hole first,then put the cartridge into the hole and install the body.

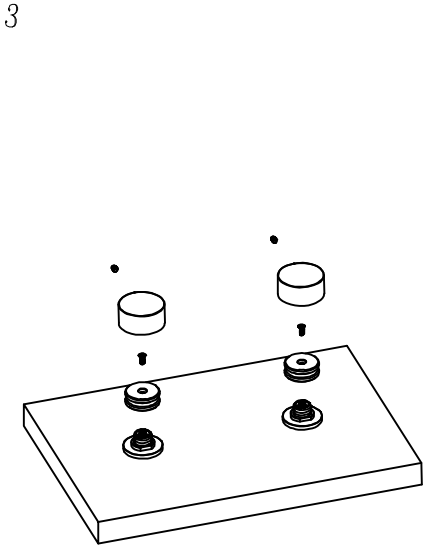

1. Tighten the screw after installed
2.install the handles and tighten the screw.

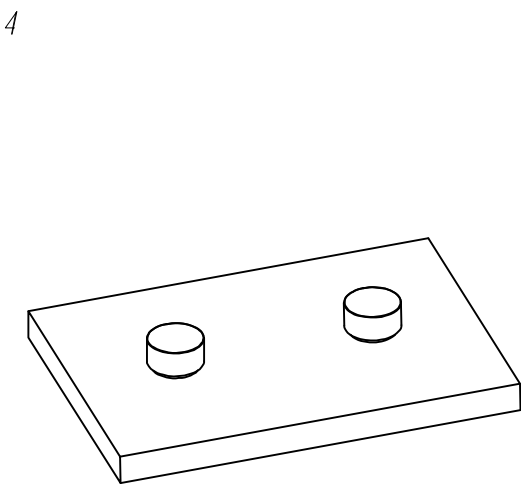

1.complete.
notes:
1.Workig pressure:0.05-1MPa
2.Working temperature:1 - 55°C
3.product is to be installed inaccordancewith AS/NZS3500.1
4.The flow controller incorporated in the outlet is tightenedto prevent removal by hand