

Model	Temperature	Dimension	Volume	Weight	Refrigerant	Power
<b>SUR-1261HP(E)</b> (CHILLER)	-6°C ~ +12°C	Ext: W1200xD600xH800 Int: W794xD437xH573	214 L	78kg	R134A	<b>Cooling:</b> 220V / 293W (50Hz) <b>Defrosting:</b> 220V / 380W (50Hz)
<b>SUR-1271HP(E)</b> (CHILLER)	-6°C ~ +12°C	Ext: W1200xD750xH800 Int: W794xD587xH573	280 L	84kg	R134A	<b>Cooling:</b> 220V / 293W (50Hz) <b>Defrosting:</b> 220V / 380W (50Hz)
<b>SUF-1271HP(E)</b> (FREEZER)	-25°C ~ -15°C	Ext: W1200xD750xH800 Int: W794xD587xH573	280 L	84kg	R404A	<b>Cooling:</b> 220V / 382W (50Hz) <b>Defrosting:</b> 220V / 395W (50Hz)

## Design Features



### Stable Temperature Range


Refrigerator  
**-6°C to 12°C**

Freezer  
**-25°C to -15°C**

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**

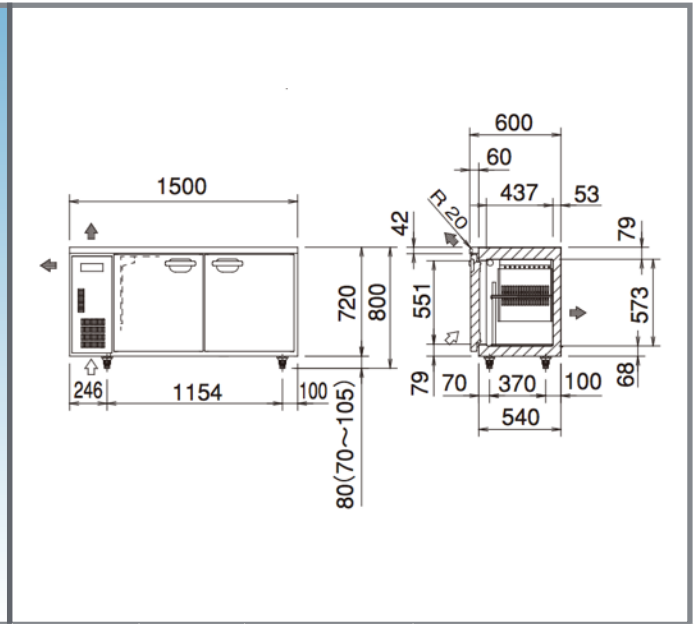

Model	Temperature	Dimension	Volume	Weight	Refrigerant	Power
<b>SUR-1561HP(E)</b> (CHILLER)	-6°C ~ +12°C	Ext: W1500xD600xH800 Int: W1094xD437xH573	296 L	86kg	R134A	<b>Cooling:</b> 220V / 293W (50Hz) <b>Defrosting:</b> 220V / 390W (50Hz)
<b>SUR-1571HP(E)</b> (CHILLER)	-6°C ~ +12°C	Ext: W1500xD750xH800 Int: W1094xD587xH573	393 L	95kg	R134A	<b>Cooling:</b> 220V / 293W (50Hz) <b>Defrosting:</b> 220V / 390W (50Hz)
<b>SUF-1571HP(E)</b> (FREEZER)	-25°C ~ -15°C	Ext: W1500xD750xH800 Int: W1094xD587xH573	393 L	105kg	R404A	<b>Cooling:</b> 220V / 389W (50Hz) <b>Defrosting:</b> 220V / 620W (50Hz)

## Design Features



### Stable Temperature Range


Refrigerator  
**-6°C to 12°C**

Freezer  
**-25°C to -15°C**

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**

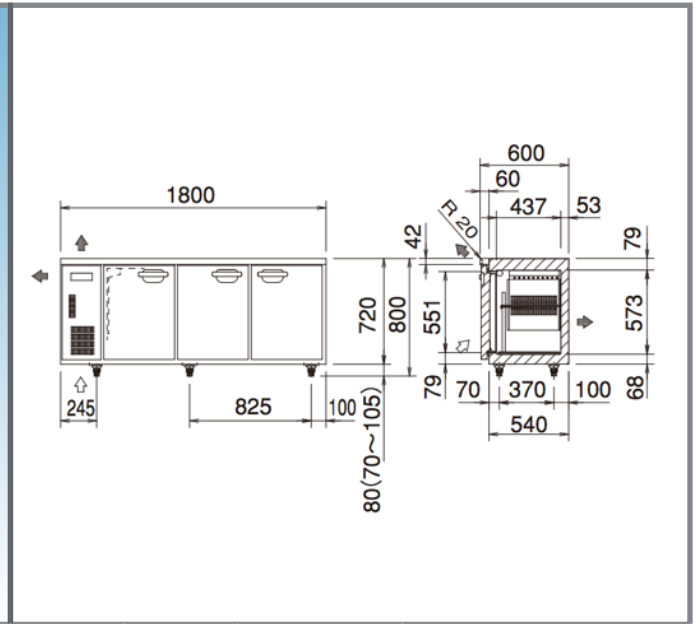

Model	Temperature	Dimension	Volume	Weight	Refrigerant	Power
<b>SUR-1861HP(E)</b> (CHILLER)	-6°C ~ +12°C	Ext: W1800xD600xH800 Int: W1394xD437xH573	377 L	99kg	R134A	<b>Cooling:</b> 220V / 293W (50Hz) <b>Defrosting:</b> 220V / 410W (50Hz)
<b>SUR-1871HP(E)</b> (CHILLER)	-6°C ~ +12°C	Ext: W1800xD750xH800 Int: W1394xD587xH573	495 L	110kg	R134A	<b>Cooling:</b> 220V / 293W (50Hz) <b>Defrosting:</b> 220V / 410W (50Hz)
<b>SUF-1871HP(E)</b> (FREEZER)	-25°C ~ -15°C	Ext: W1800xD750xH800 Int: W1394xD587xH573	495 L	120kg	R404A	<b>Cooling:</b> 220V / 406W (50Hz) <b>Defrosting:</b> 220V / 640W (50Hz)

## Design Features



**Stable Temperature Range**

**Refrigerator**  
-6°C to 12°C

**Freezer**  
-25°C to -15°C

**PILLARLESS  
DESIGN**

**LOCKING  
SYSTEM**

**INTERNAL LED  
LIGHTING SYSTEM**

