




GS 300 L - Tuned Emblem Package

Part Number: 00644-05100-055

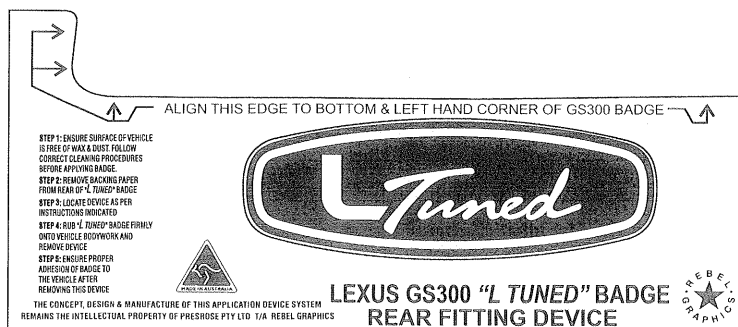

Section I. Installation Preparation

Kit Contents

#	Qty	Description
1	3	Device Sets - (1) LHS Device (1) RHS Device (1) Rear Device
2	3	"L Tuned" Lenscal Part No. 0064 -05100-055 (included with each device ready for fitment as per detailed instructions)
3	1	Fitting Instructions

Tools Required

Shop Cloths
Prepsol or Methylated Spirits

General Applicability

Lexus GS300

Recommended Sequence of Application

#	Accessory
1	Side Emblems
2	Rear Emblem

Legend



CRITICAL PROCESS:

Proceed with caution to ensure a quality installation.
These points will be audited on a completed vehicle installation.




GENERAL PROCESS:

This highlights specific processes to ensure a quality installation.
These points will be audited on a completed vehicle installation.

Recommendations

1. The installation should be performed above 15°C for proper adhesion.
To aid adhesion, warm the point of contact with a heat gun while removing the adhesive cover.

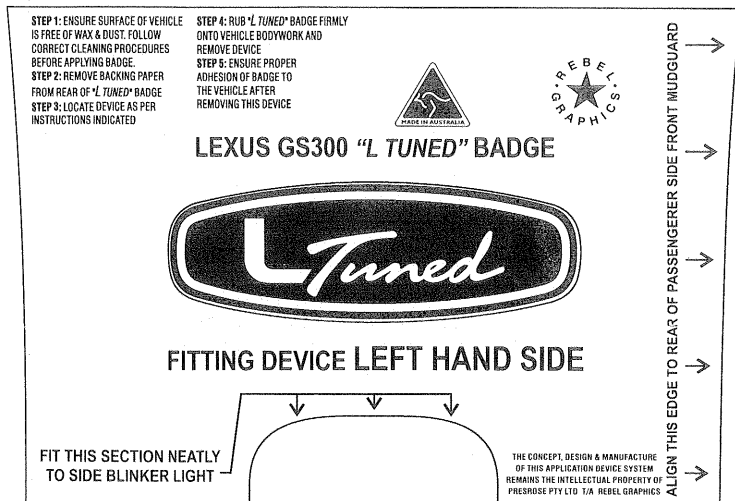



GS 300 L - Tuned Emblem Package

Part Number: 00644-05100-055

Section II. Installation

Procedure-Side Emblems

A. Chemically Clean Surface Area

- ➡ 1. Clean the entire surface to remove grease and wax using Prepsol or Methylated Spirits.

B. Expose Adhesive

- ➡ 1. Remove adhesive covering on rear of badge.
⚠ Avoid finger contact with the adhesive.

C. Apply Device

- ➡ 1. Fit the device as shown. Align it with the door opening and the side blinker light.



D. Installing Emblem on Vehicle

- ➡ 1. Press the badge onto the vehicle's bodywork and remove device.
⚠ 2. Ensure proper adhesion of the badge.

E. Concluding Steps

- ➡ 1. Final Inspection:
i. Check for loose edges and proper alignment.
ii. Repair or replace the parts if required.

F. Repeat the process for the other side.

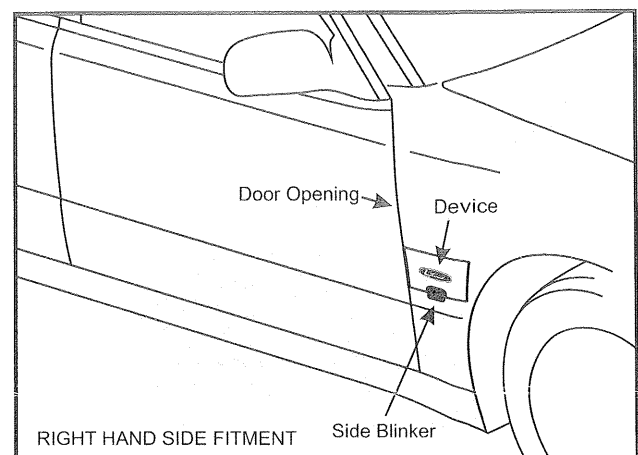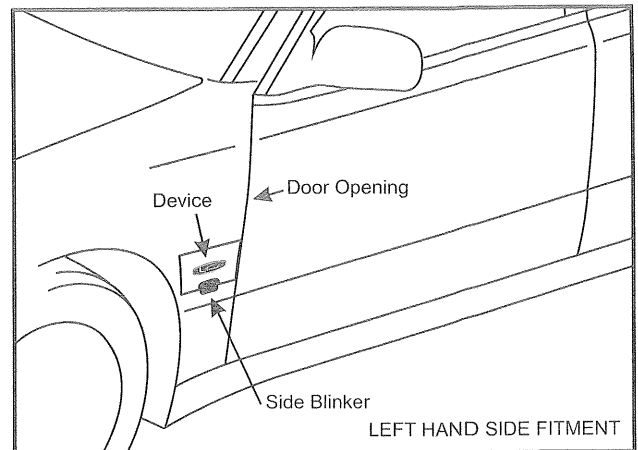

Section III. Installation

Procedure-Rear Emblem

A. Chemically Clean Surface Area

- ➡ 1. Clean the entire surface to remove grease and wax using Prepsol or alcohol..

B. Expose Adhesive

- ➡ 1. Remove adhesive covering on rear of badge.
⚠ Avoid finger contact with the adhesive.

C. Apply Device

- ➡ 1. Fit the device as shown. Align it to the bottom & left hand end of the GS300 badge.

D. Installing Emblem on Vehicle

- ➡ 1. Press the badge onto the vehicle's bodywork and remove device.
⚠ 2. Ensure proper adhesion of the badge.

E. Concluding Steps

- ➡ 1. Final Inspection:
i. Check for loose edges and proper alignment.
ii. Repair or replace the parts if required.

