

# Gold Series High Bay Slimline 200w



## DESCRIPTION:

Touch-Plate's Slimline High Bay was designed to provide higher lumens and even light distribution. Using up to 70% less power over traditional metal halide or high pressure sodium lighting. Our Slimline High Bay is optimal for any application that requires a High Bay.

## PRODUCT FEATURES:


- Instant Start: no flickering or humming
- Uniform Light
- Isolated driver
  - Round driver rated for 55°C (131°F)
- Die cast aluminum housing
- Lifetime of 50,000 hrs or greater
- UL Listed (E469084)
- DLC Listed
  - 200w (HB07-200w)
- 5 Year Limited Warranty

## SPECIFICATIONS:

- Wattage: 200w
- Lumens: 33,000 (approx > 130lm/w)
- Equivalence: 600w HID/HPS/MH
- IP Rating: IP65
- LED Chips: SMD 2835
- PF: >0.90

## PHYSICAL PARAMETERS:

- Dimensions
  - Diameter: 12.60"
  - Hook Height: 7.4"
- Weight
  - 9.5 lbs

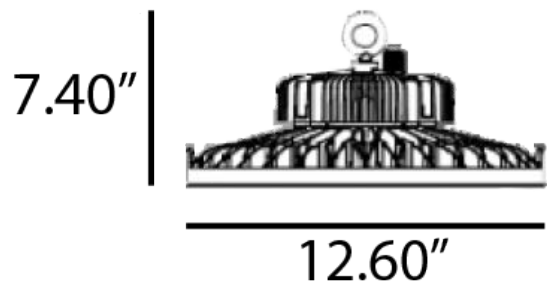



# Gold Series High Bay Slimline

## ORDERING GUIDE

LED Type <b>XXX-</b>	Lumens - Wattage <b>XXX-XXX-</b>	CCT <b>XX</b>	Voltage <b>X-</b>	Color <b>X</b>
<ul style="list-style-type: none"> <li><b>HBS</b> High Bay Slimline</li> </ul>	<ul style="list-style-type: none"> <li><b>330-200</b> 36,000lm - 200w</li> </ul>	<ul style="list-style-type: none"> <li><b>30</b> 3000k</li> <li><b>40</b> 4000k</li> <li><b>50</b> 5000k</li> <li><b>60</b> 5000k</li> </ul>	<ul style="list-style-type: none"> <li><b>U</b> 120-277v</li> <li><b>I</b> 200-480v</li> </ul>	<ul style="list-style-type: none"> <li><b>B</b> Black</li> <li><b>W</b> White</li> </ul>

## ADDITIONAL ORDERING OPTIONS

(specified at time of order)

### Lens Options

- Clear Glass (Standard)
- Milky Glass

### Beam Angle


- 60°
- 90°
- 110° (TP Standard)

## ACCESSORIES

(specified at time of order)

- |   |  |  |
|---|--|--|
| <ul style="list-style-type: none"> <li>• Wire Guard</li> <li>• Diffuser</li> <li>• Occupancy Sensor</li> <li>• Photocontrol Sensor</li> </ul> | <ul style="list-style-type: none"> <li>• Zigbee Relay</li> <li>• Zigbee Dimmer</li> <li>• Zigbee Controller</li> </ul> | <ul style="list-style-type: none"> <li>• Stainless Steel Cable: 2ft / 3ft / 7ft / 10ft / 20ft</li> <li>• Twist Lock Plug: 3ft / 10ft</li> <li>• No Plug Extension: 3ft / 10ft</li> <li>• USA 3 Prong Plug: 7ft</li> <li>• S Hook Clip: Medium / Large</li> <li>• Connection Box: Small / Large</li> <li>• Connector: 3-Pin Splice</li> </ul> |
|---|--|--|

## PHOTOMETRIC

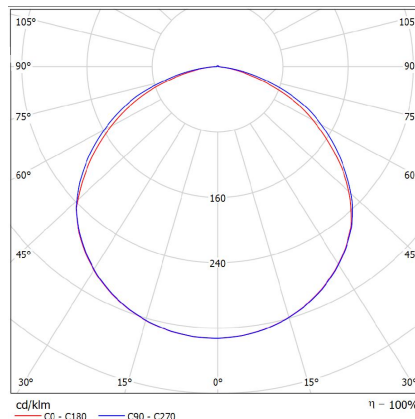

# Gold Series High Bay Slimline

## INSTALLATION INFORMATION (WIRING)


This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

### **DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION**


- High Bays can be ordered with a specified twist lock plug or without a plug
- Plug in the High Bay or make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.

## INSTALLATION INFORMATION


- Drill a 10mm hole at the position where you want to install the fixture
- Push the installation hook into the hole and secure it by tightening the nut
- Hang the fixture on the hook directly or by using a suspension chain
- Connect the power cable to the power line

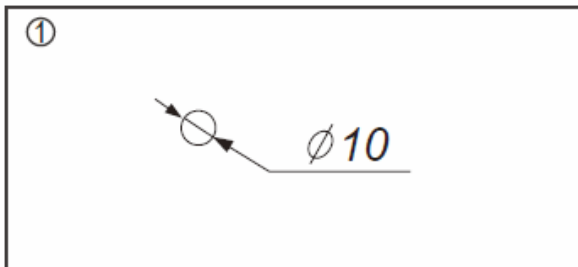


Drill a hole in the ceiling

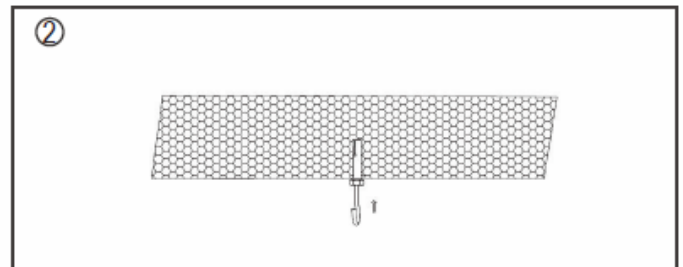


Push in the hook

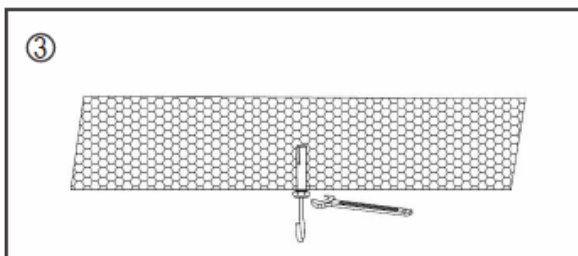

Secure the hook by tightening the nut

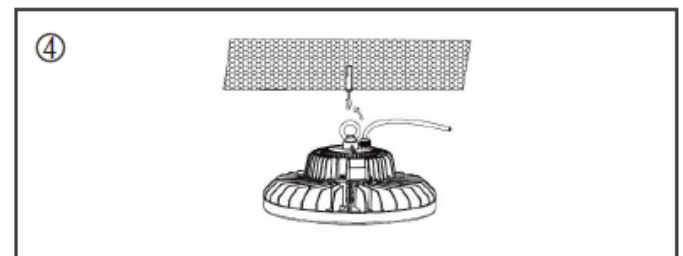

Hang the fixture on the hook

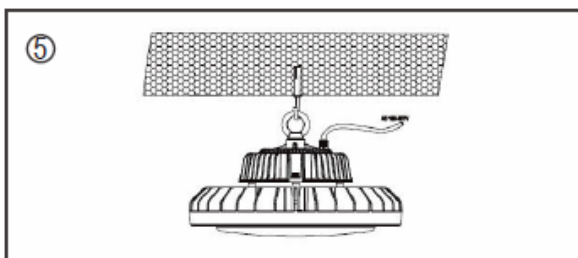

Connect the fixture to the power line