



NP22A



PF3A



NP22



PF2



NP303



NP304



RC101



NP305



NP306



RC205

RC206

RC209



PF5



F720



F720C



NP12K

NP22 DUST MASK**PF2 FILTER**

Use with NP22 dust mask.

NP22A CARBON FILTER MASK**PF3A CARBON FILTER**

Use with NP22A mask.

NP303 DUST RESPIRATOR (ONE RC101 INCLUDED)

Single cartridge, twin exhalation valve.

NP304 DUST RESPIRATOR (TWO RC101 INCLUDED)

Twin cartridge, twin exhalation valve.

RC101 DUST CARTRIDGE

Use with NP303, NP304 respirators ONLY.

NP305 CHEMICAL RESPIRATOR (CARTRIDGE NOT INCLUDED)

Single cartridge, twin exhalation valve.

NP306 CHEMICAL RESPIRATOR (CARTRIDGES NOT INCLUDED)

Twin cartridge, twin exhalation valve.

RC201 DUST CARTRIDGE

Use with NP305, NP306 respirators.

RC202 CHEMICAL CARTRIDGE (USE WITH NP305, NP306)

For organic vapours, mists and fumes of low toxicity.

RC203 CHEMICAL CARTRIDGE (USE WITH NP305, NP306)

For spray painting and organic vapours of low toxicity.

RC205 CHEMICAL CARTRIDGE (USE WITH NP305, NP306)

For acid gases of low toxicity.

RC206 CHEMICAL CARTRIDGE (USE WITH NP305, NP306)

For organic, inorganic vapours and acid gases of low toxicity.

RC209 CHEMICAL CARTRIDGE (USE WITH NP305, NP306)

For agricultural sprays.

PF5 PREFILTER (USE WITH NP305, NP306)**F720 N95 MASK**

U.S.A. NIOSH approved N95 particulate filter mask.

Pack : 50 PCS/BOX

F720C N95 CARBON MASK

U.S.A. NIOSH approved N95 particulate filter mask.

Pack : 50 PCS/BOX

NP12K FACE MASK


4-ply activated carbon filter mask.

Size : 90 x 175 mm

Pack : 1 PCS/polybag ; 50 PCS/BOX



CE
ANSI Z87 SG152




CE
ANSI Z87 SG154



CE NP102



CE NP104



CE NP105



GW250



PS03C



PS03B3



PS09C



PS09B3

SG152 DUST GOGGLE *CE *ANSI Z87
Used for average dust condition, lens 1.5mm.

SG154 CHEMICAL GOGGLE *CE *ANSI Z87
Used for fine dust and chemical splash, lens 1.5mm.

NP102 DUST GOGGLE *CE
Used for average dust condition, lens 1.0mm.

NP104 CHEMICAL GOGGLE *CE
Used for fine dust and chemical splash, lens 1.0mm.

NP105 ANTI-FOG GOGGLE *CE
ANTI-FOG lenses have a special coating to prevent fogging under extreme temperature changes, lens 1.0mm.

GW250 GAS WELDING GOGGLE
Lift-front type lenses holder, used for both of welding and chipping operations.

PS03C SAFETY SPECTACLE
Clear

PS03B3 SAFETY SPECTACLE
Grey

PS09C SAFETY SPECTACLE
Clear

PS09B3 SAFETY SPECTACLE
Grey



CE
ANSI 287
A2



CE
ANSI 287
A3



CE
ANSI 287
A4



AR4



B1BL BROWGUARD *CE *ANSI 287 *CSA 294.3
Impact-resistant ABS browguard, blue, use with "FC" series visors.

B1YE BROWGUARD *CE *ANSI 287 *CSA 294.3
Impact-resistant ABS browguard, yellow, use with "FC" series visors.

B4BL BROWGUARD *CE
Impact-resistant ABS browguard, blue, use with "FC" series visors, with H04 headgear.


B4YE BROWGUARD *CE
Impact-resistant ABS browguard, yellow, use with "FC" series visors, with H04 headgear.

A2 VISOR BRACKET *CE *ANSI 287
Impact-resistant ABS, use with "FC" series visors.

A3 VISOR BRACKET *CE *ANSI 287
Semi-aluminum, use with "FC" series visors.

A4 VISOR BRACKET *CE *ANSI 287
Aluminum, use with "FC" series visors.

AR4 VISOR BRACKET
Aluminum, use with "FC" series visors.
Fit in with round-brim safety cap only.

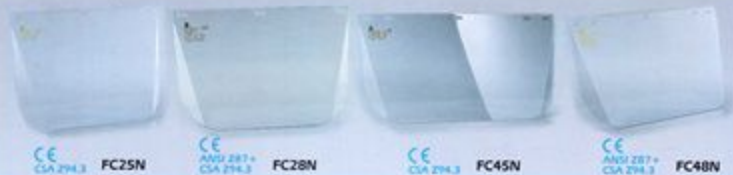

CE
CSA 294.3

FC25N

CE
ANSI Z87+
CSA 294.3

FC28N

CE
CSA 294.3

FC45N

CE
ANSI Z87+
CSA 294.3

FC48N



CE
CSA 294.3

FC25

CE
ANSI Z87+
CSA 294.3

FC28

CE
ANSI Z87+
CSA 294.3

FC28T

ANSI Z87+
FC28G5



CE
CSA 294.3

FC45

CE
ANSI Z87+
CSA 294.3

FC48

CE
ANSI Z87+
CSA 294.3

FC48T

CE
ANSI Z87+
FC48G5

FC25N FACESHIELD VISOR *CE *CSA 294.3

POLYCARBONATE, clear, 8" x 12" x 0.8mm,
for impact resistance.

FC28N FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3

POLYCARBONATE, clear, 8" x 12" x 1.0mm,
for heat and impact resistance.

FC45N FACESHIELD VISOR *CE *CSA 294.3

POLYCARBONATE, clear, 8" x 15 1/2" x 0.8mm,
for impact resistance.

FC48N FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3

POLYCARBONATE, clear, 8" x 15 1/2" x 1.0mm,
for heat and impact resistance.

FC25 FACESHIELD VISOR *CE *CSA 294.3

POLYCARBONATE, Clear, 8" x 12" x 0.8mm, aluminum bound, provides
protection against chemical splash and light impact.

FC28 FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3

POLYCARBONATE, Clear, 8" x 12" x 1.0mm, aluminum bound. For heat
and impact resistance.

FC28T FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3

POLYCARBONATE, Clear, 8" x 12" x 1.5mm, aluminum bound. For heat
and impact resistance.

FC28G5 FACESHIELD VISOR *ANSI Z87+

POLYCARBONATE, Green, Scale No. 2-5, 8" x 12" x 1.0mm,
aluminum bound. For heat and impact resistance.

FC45 FACESHIELD VISOR *CE *CSA 294.3

POLYCARBONATE, Clear, 8" x 15 1/2" x 0.8mm, aluminum bound,
provides protection against chemical splash and light impact.

FC48 FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3

POLYCARBONATE, Clear, 8" x 15 1/2" x 1.0mm, aluminum bound.
For heat and impact resistance.

FC48T FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3

POLYCARBONATE, Clear, 8" x 15 1/2" x 1.5mm, aluminum bound.
For heat and impact resistance.

FC48G5 FACESHIELD VISOR *CE *ANSI Z87+

POLYCARBONATE, Green, Scale No. 2-5, 8" x 15 1/2" x 1.0mm,
aluminum bound. For heat and impact resistance.



NP354
ANSI S3.19



NP364
ANSI S3.19



FEP03C



FEP03



EM62



EM92RD



EM92BL



K4BL
ANSI Z87



K4YE
ANSI Z87



K25
ANSI Z87+



K28
ANSI Z87+



K25



K28
ANSI Z87+



K25N



K28N
ANSI Z87+

NP354 EARPLUG *ANSI S3.19

With case & neck string.

NP364 EARPLUG *ANSI S3.19

With case & neck string.

FEP03C FOAM EARPLUG *CE

With neck string.

FEP03 FOAM EARPLUG *CE

Without neck string.

EM62 EARMUFF

Light in weight, it can be worn in 3 positions – overhead, behind neck or under chin.

EM92RD EARMUFF

Very comfortable to wear, foam pvc ear cushion, foam pvc head cushion, suitable for continuous use over long periods.

EM92BL EARMUFF

Very comfortable to wear, foam pvc ear cushion, foam pvc head cushion, suitable for continuous use over long periods.

K4BL BROWGUARD *CE *ANSI Z87

Impact-resistant ABS browguard, blue, use with "K" series visors, with HGH headgear.

K4YE BROWGUARD *CE *ANSI Z87

Impact-resistant ABS browguard, yellow, use with "K" series visors, with HGH headgear.

K25 FACESHIELD VISOR *CE

POLYCARBONATE, Clear, 8" x 12" x 0.8mm, aluminum bound, for impact resistance.

K28 FACESHIELD VISOR *CE *ANSI Z87+

POLYCARBONATE, Clear, 8" x 12" x 1.0mm, aluminum bound, for heat and impact resistance.

K25N FACESHIELD VISOR *CE

POLYCARBONATE, Clear, 8" x 12" x 0.8mm, for impact resistance.

K28N FACESHIELD VISOR *CE *ANSI Z87+

POLYCARBONATE, Clear, 8" x 12" x 1.0mm, for heat and impact resistance.



NP312

NP503



NP505



NP901



NP375



52LR



CE
ANSI Z87
CSA Z94.3

633P



567P



CE ANSI Z87 6PA2

ANSI Z87 6PA3

NP312 CHEMICAL HOOD

The assembly consists of a twin cartridge respirator and a light weight hood.

Designed to protect head, face, eyes and lungs against dust, paints, solvent, etc.

NP901 ARC-WELDING LEATHER HOOD

Lift-front lens holder. Used in narrow working areas for arc-welding operation.

NP503 AIR-SUPPLIED SANDBLAST HOOD

Designed for all sandblasting operations.
Air regulator provides smooth and low noise air flow.
Lens size: 5 1/2" x 4 1/2"

NP505 AIR-SUPPLIED SPRAY PAINTING HOOD

Light in weight, replaceable visor.
Air regulator provides smooth and low noise air flow.

NP375 AIR-SUPPLIED MASK

The assembly consists of a half-mask, waist belt, air regulator and quick connector. The air diffuser under the chin balances the air flow in the mask.

52LR STAINLESS STEEL PROTECTIVE GLOVE

633P WELDING HELMET (LENSES NOT INCLUDED) *CE
Toughness and moisture proof, lift-front lens holder are
insulated, polypropylene shell. Lens size: 4 1/2" x 2" *ANSI Z87
*CSA Z94.3

567P WELDING HANDSHIELD (LENSES NOT INCLUDED)
Polypropylene shell. Lens size: 4 1/2" x 2"

6PA2 CLIP-CAP WELDING HELMET (CAPS NOT INCLUDED) *CE
Lift-front lens holder, lens size: 4 1/2" x 2", polypropylene shell, *ANSI Z87
with ABS bracket.

6PA3 CLIP-CAP WELDING HELMET (CAPS NOT INCLUDED)
Lift-front lens holder, lens size: 4 1/2" x 2", polypropylene shell, *ANSI Z87
with semi-aluminum bracket.



42313X



4542



CE AL145



CE AL165



AL1



AL2



AL3



AL4



AL5




AL6




AL7



ALB

AL145 ALUMINIZED GLOVE 
Length: 14"

AL165 ALUMINIZED GLOVE 
Length: 16"

AL1 ALUMINIZED HOOD
Used in industrial radiant heat situations.

AL2 ALUMINIZED COAT
Chest circle: 48", coat length: 29"

AL3 ALUMINIZED TROUSERS
Waist circle: 34", trouser length: 39"

AL4 ALUMINIZED BOOTS
Steel toe, boots height: 8"

AL5 ALUMINIZED GARTERS
Width: 16"
Length: 9"

AL6 ALUMINIZED APRON WITH SLEEVES
Chest width: 27"
Apron length: 49"

AL7 ALUMINIZED APRON
Width: 27", length: 38"

ALB ALUMINIZED SLEEVES
Length: 22"



CE ANSI Z89 M1



CE M6



CE BP6SOR



CE BP6SBL



CE BP6SWH



CE BP65YE



CE BP65GN



CE ANSI Z87+ CSA 294.3 B1YE



CE ANSI Z87 CSA 294.3 C3YE



CE FCB3 ANSI Z87+ CSA 294.3

M1 CHIN STRAP *CE *ANSI Z89

M6 CAP SUSPENSION *CE

BP6SOR BUMP CAP, ORANGE (CHINSTRAP NOT INCLUDED)
HDPE SHELL *CE

BP6SBL BUMP CAP, BLUE (CHINSTRAP NOT INCLUDED)
HDPE SHELL *CE

BP6SWH BUMP CAP, WHITE (CHINSTRAP NOT INCLUDED)
HDPE SHELL *CE

BP65YE BUMP CAP, YELLOW (CHINSTRAP NOT INCLUDED)
HDPE SHELL *CE

BP65GN BUMP CAP, GREEN (CHINSTRAP NOT INCLUDED)
HDPE SHELL *CE

B1YE BROWGUARD *CE *ANSI Z87 *CSA 294.3
Impact-resistant ABS browguard, yellow, use with "FC" series visors.

C3YE CHIN GUARD *CE *ANSI Z87 *CSA 294.3
Impact-resistant ABS.
Use with "FCB3" visors.

FCB3 FACESHIELD VISOR *CE *ANSI Z87+ *CSA 294.3
POLYCARBONATE, 8" x 15½" x 1.0mm.
Clear, for heat and impact resistance.
Use with "B1" series browguards and "C3" series chin guards.



CE M1



CE M2



CE HC31RD



CE HC31OR



CE HC31BL



CE HC31WH



CE HC31YE



CE HC31GN



CE M1



CE SU2R



CE HR35WH



CE HR35YE

M1 CHIN STRAP *CE

M2 CAP SUSPENSION *CE

Pin-lock, 6 point polyethylene suspension

HC31BL SAFETY CAP, BLUE *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

HC31WH SAFETY CAP, WHITE *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

HC31YE SAFETY CAP, YELLOW *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

HC31GN SAFETY CAP, GREEN *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

HC31RD SAFETY CAP, RED *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

HC31OR SAFETY CAP, ORANGE *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

SU2R CAP SUSPENSION *CE

6-point nylon suspension

HR35WH SAFETY CAP, WHITE *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*

HR35YE SAFETY CAP, YELLOW *CE

*HDPE SHELL, Electrical Insulation 440V a.c.
(CHINSTRAP NOT INCLUDED)*



SIL1515



ATG1515



HTX1000



HTX600

SIL1515 FIRE BLANKET

This SIL-1515 fire blanket offers help putting out dangerous fires within the home, workplace, car, or boat.

Size: 150 x 150 cm

Thickness: 0.43 mm

Temperature tolerance: 537°C or 1000°F

Abrasion resistance: Good

ATG1515 FIRE BLANKET

This ATG-1515 fire blanket offers help putting out dangerous fires within the home, workplace, car, or boat.

Size: 150 x 150 cm

Thickness: 0.48 mm

Temperature tolerance: 537°C or 1000°F

Abrasion resistance: Good

HTX600 WELDING BLANKET

This HTX-600 welding blankets provide excellent protection from sparks, spatter and slag generated by welding or metal-cutting application.

Size: 89 cm x 150 cm

Thickness: 0.71 mm

Temperature tolerance: 1649°C or 3000°F

Abrasion resistance: Excellent

HTX1000 WELDING BLANKET

This HTX-1000 welding blankets provide excellent protection from spark, spatter and slag generated by welding or metal-cutting application.

Size: 89 cm x 150 cm

Thickness: 1.22mm

Temperature tolerance: 1649°C or 3000°F

Abrasion resistance: Excellent



Belt : 50 mm

NP727



Belt : 60 mm

NP737



Belt : 50 mm

NP757



Belt : 60 mm

NP758

NP727 SAFETY BELT

One DOUBLE-LOCK hook, one D-rings, one buckle.
Belt: 50 mm x 1200 mm
Rope: 12 mmφ x 1500 mm

NP727D As above, with TWO D-rings

NP737 SAFETY BELT

One DOUBLE-LOCK hook, two D-rings, one buckle.
Belt: 60 mm x 1200 mm
Rope: 12 mmφ x 1500 mm

NP757 SAFETY BELT

Safety hook opening: 2"
Belt: 50mm x 1200mm
Rope: 12mmφ x 1500mm

NP757D As above, with TWO D-rings

NP758 SAFETY BELT

Safety hook opening: 2"
Belt: 60mm x 1200mm
Rope: 12mmφ x 1500mm

NP758D As above, with TWO D-rings



NP747

Belt : 50 mm



NP787

Belt : 50 mm



NP787H

Belt : 45 mm



KA91

Belt : 45 mm



KA91H

NP747 LINEMEN'S SAFETY BELT

One adjustable fall arrestor, one DOUBLE-LOCK hook, two D-rings, one buckle.
Main belt width: 50mm. Pad belt width: 80mm.
Rope diameter: 16mm. Length: 2000mm.
The rope stopper is a new and special design.

NP787 PARACHUTE TYPE SAFETY HARNESS

One DOUBLE-LOCK hook, two D-rings.
Belt: 50 mm
Rope: 14 mmφ x 1500 mm

NP787H PARACHUTE TYPE SAFETY HARNESS

One large DOUBLE-LOCK Hook, safety hook opening: 2", one D-ring
Belt: 50 mm
Rope: 14 mmφ x 1500 mm

KA91 FULL BODY HARNESS

One DOUBLE-LOCK hook, one D-ring
Belt: 45 mm
Rope: 14 mmφ x 1500 mm

KA91H FULL BODY HARNESS

One large DOUBLE-LOCK hook, safety hook opening: 2", one D-ring
Belt: 45 mm
Rope: 14 mmφ x 1500 mm



EW6



EW402



EW407



EW607

EW6 EMERGENCY EYEWASH BOTTLE

Keep filled with sterile water.

EW402 EMERGENCY EYE-WASH (Wall mounted Type)

Material of Basin : Stainless steel.

Diameter of Basin : 30cm.

Sprayheads with protective covers.

EW407 EMERGENCY EYE-WASH (Pedestal mounted Type)

Material of Basin : Stainless steel.

Diameter of Basin : 30cm.

Sprayheads with protective covers.

Diameter of Floor Flange : 25cm (Stainless steel)

EW607 EMERGENCY EYE-WASH AND DRENCH SHOWER

Material of Basin : Stainless steel.

Diameter of Basin : 30cm.

Sprayheads with protective covers.

Diameter of Floor Flange : 25cm (Stainless steel)

Copper alloy shower head.

spascian

Made in Italy



TR-2002



200A2



200K2



202ABEK2



ABEK2-P3



TC70



RV1



RCB200

TC70

TR2002 FULL-FACE RESPIRATOR

Full face Respirator with polycarbonate wide vision Visor.

200A2 A2 CANISTER

For use against organic gases and vapours with boiling point > 65°C.

200K2 K2 CANISTER

For use against ammonia and organic ammonia derivatives.

202ABEK2 A2 B2 E2 K2 CANISTER

Combined filter for use against organic vapours having point higher than 65°C; and inorganic gases and vapours, acid gases, Sulphur Dioxide (SO₂), Ammonia (NH₃) and its organic derivatives, dusts, fumes and mists.

ABEK2-P3 A2 B2 E2 K2 & P3 CANISTER

Combined filter for use against organic vapours having point higher than 65°C; and inorganic gases and vapours, acid gases, Sulphur Dioxide (SO₂), Ammonia (NH₃) and its organic derivatives, dusts, fumes and mists. It also provides Class 3 particle filtration.

TC70 TRAFFIC CONE

Durable traffic cone with square base. The reflective collar increases visibility during the night time.

Height : 70cm Base : 36 x 36cm

RCB200 RETRACTABLE CONNECTING BAR

Length : 200cm.

RV1 REFLECTIVE VEST