




Temperature
4-15°C

HCFC
FREE

● This picture is for reference.

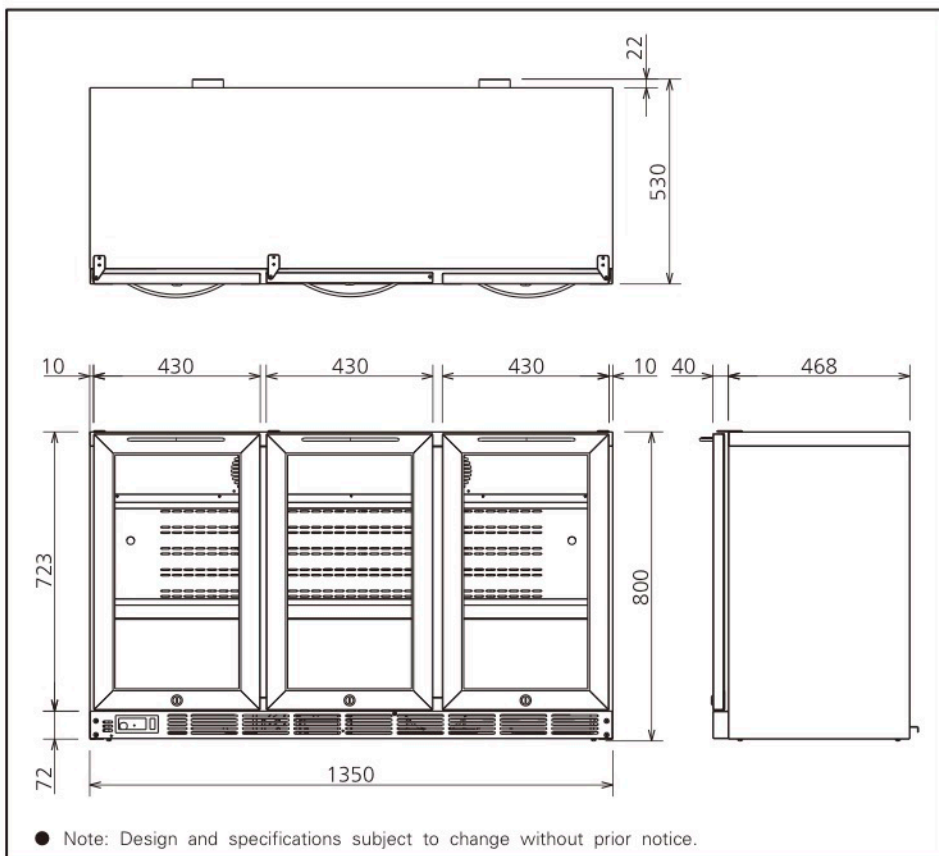

| MODEL | | BR-3U | | |
|-----------------------|---------------------------|---|---|-----|
| Dimensions | Width | 1350 | 530 | 800 |
| | Out-side | 1350 | 530 | 800 |
| | In-side | 1270 | 378 | 645 |
| CABINET | Exterior | Front : Glass Exterior : Stainless steel plate | | |
| | Door | Aluminum frame glass door | | |
| | Interior | Stainless steel plate | | |
| | Shelf | White painted steel shelf | | |
| | Insulation | Hard cyclopentane foam | | |
| | PERFORMANCE | Temperature range usable | Ambient temp 30°C, humidity 70% without direct sunlight | |
| | Internal temp | 4~15°C | | |
| | Temperature setting range | 4~10°C | | |
| REFRIGERANTION SYSTEM | Compressor | Embraco EMS6170Z | | |
| | Condenser | Fin Tube, Forced-air Cooling. | | |
| | Evaporator | Fin Tube, Forced-air Cooling. | | |
| | Refrigerant | R134A 190g | | |
| | Fan | For cooling : 220V, 44W For Condenser : 220V, 7W | | |
| | Thermometer control | Microcomputer control | | |
| | Defrost | 12 hour cycle, Off-cycle defrost | | |
| | Internal light | 28W | | |
| ELECTRICITY | Power | 220V, 1-phase, 50Hz | | |
| | Energy consumption | Cooling 410W | | |
| POWER | Power cable | Cable length: 2.0m | | |
| | Adoptable Plug | Category D : 10A 250V ground wire | | |
| | Adjustable leg | M8X20 | | |
| | Accessories | White painted steel shelf x 4 | | |
| | Effective capacity | 208L | | |
| | Weight | 115kg | | |

Distributed by: