

Gold Series T8 40w



DESCRIPTION:

Touch-Plate's T8 was designed to provide higher lumens and to replace T8 and T12 fluorescent light bulbs. Our T8's can offer energy savings of 70% or greater over traditional lighting. The T8 bulb is optimal for retrofit installations.

PRODUCT FEATURES:


- Instant Start; no flickering or humming
- Eco-friendly; no mercury
- Directional light; illuminating exactly what is needed
- Ballast Bypass
- Single End (Line & Neutral on same end)
- Lifetime of 50,000 hrs or greater
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 40w
- Lumens: 4,800 (approx > 120lm/w)
- Equivalence: 85w Fluorescents
- CRI: >80Ra
- Beam Angle: >300°
- Base Type: G13
- Material: Milky Glass
- Dimmable: Non-Dimmable
- IP Rating: IP20
- LED Chips: Epistar
- PF: >0.90

PHYSICAL PARAMETERS:

- Dimensions
 - Bulb Diameter: 1.12"
 - Pin Diameter: .50"
 - Length: 96"
- Weight
 - 1.85lbs

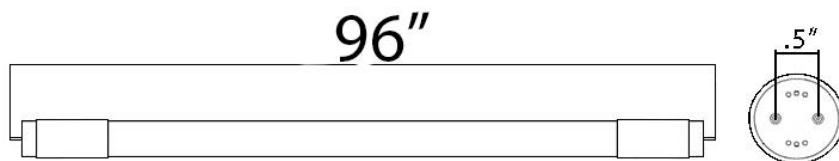



Gold Series T8

ORDERING GUIDE

LED Type XXX-	Lumens - Wattage XXX-XXX-	CCT XX	Voltage X-	Base Type XX
<ul style="list-style-type: none"> T88 T8 8ft 	<ul style="list-style-type: none"> 048-040 4,800lm - 40w 	<ul style="list-style-type: none"> 35 3500k 40 4000k 45 4500k 50 5000k 	<ul style="list-style-type: none"> U 120-277v 	<ul style="list-style-type: none"> BS Ballast Bypass Single End


ACCESSORIES

(specified at time of order)


- Non-Shunted Shunts (small)
- Non-Shunted Shunts (medium)
- Shunted Shunts (small)
- T8 retrofit bracket (to convert 8ft to two 4ft's)

Spectrum Distribution


Warm white - 3000K

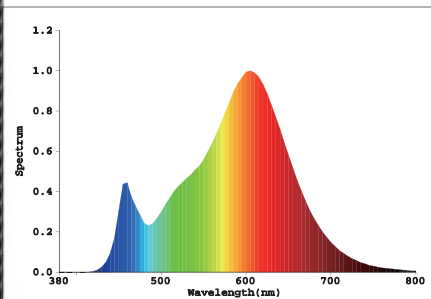

Neutral white - 4000K

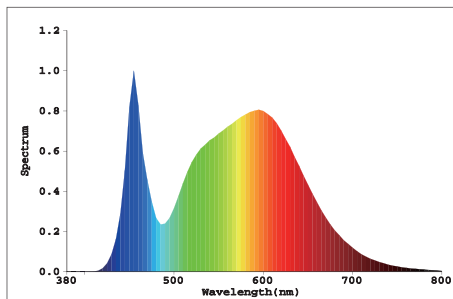

Daylight - 5000K

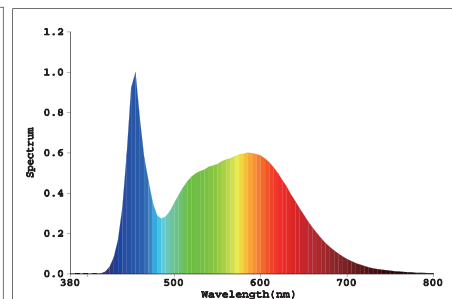

Gold Series T8

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Remove the old ballast or disconnect the ballast from the existing lamp holder.
- Reconnect the wiring directly to the existing lamp holder.
- Install the new LED.

INSTALLATION INFORMATION

