

RUBBER MATTING & SHEETING

RUBBER MATTING & SHEETING

INTRODUCTION

INDUSTRIAL RUBBER SHEETING & FLOORING –NATURAL & SYNTHETIC RUBBERS, SUPERIOR QUALITY TO RECYCLED PRODUCTS

The industrial rubber sheeting and flooring range, which is available from stock, is produced from natural and synthetic rubbers, and is of a superior quality to recycled products.


The matting is used in almost every industry – agriculture to cosmetics; mining to construction, and most sectors in between.

Our range is extensive and caters for a wide range of applications, such as:

- Workshops, mobile workshops, transport industry.
- Factory walkways, benches and assembly floors
- Data centre flooring
- Gym and play area flooring
- Animal pens, milking parlors, kennels and horseboxes
- Machine parts – gaskets, seals, and curtains

RUBBER FLOOR COVERING

ANTI-SLIP FLOOR COVERING

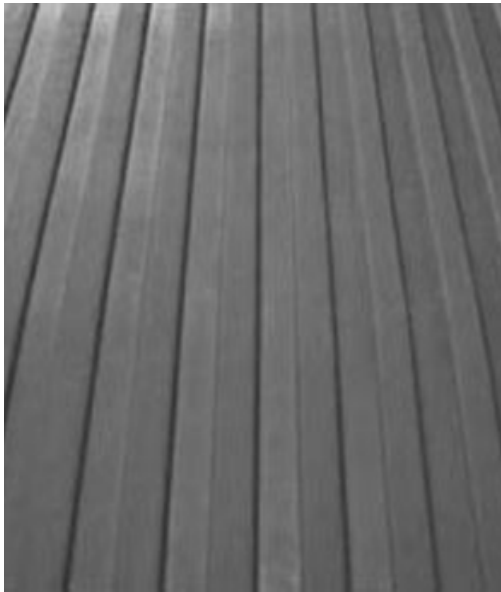

The rubber floor covering, which is available from stock, is produced from 'virgin' natural and synthetic rubbers, and not to be confused with lower-end recycled products.

Anti-slip floor covering, ROHS & REACH compliant, 6 pattern options.

FEATURES & BENEFITS

- Non-porous
- Anti-slip, reduces chance of injury
- To HSE requirement
- Great resistance to chemicals
- Avoids bacteria build-up, easy to clean and dries quickly
- ROHS and REACH compliant
- Stocked in 3mm x 1.2m x 5m

TYPICAL APPLICATIONS


- MOBILE WORKSHOPS
- DOOR MATTING AND WALKWAYS
- MACHINE OPERATOR WORKSTATIONS
- KENNELS
- TRAILER BEDS
- FACTORY FLOORING
- GYM FLOORING
- WAREHOUSE & TRADE COUNTERS

TYPES AVAILABLE

- CORRUGATED PATTERN BLACK 3MM X 1.2MTR X 5MTR
- NARROW RIB PATTERN BLACK 3MM X 1.2MTR X 5MTR
- LARGE RIBBED PATTERN BLACK 3MM X 1.2MTR X 5MTR
- ROUND DOT PATTERN BLACK 3MM X 1.2MTR X 5MTR
- DIAMOND PATTERN BLACK 3MM X 1.2MTR X 5MTR
- CHECKER PATTERN BLACK 3MM X 1.2MTR X 5MTR

INDUSTRIAL RUBBER SHEETING

2MM, 3MM, 4MM & 6MM THICKNESS

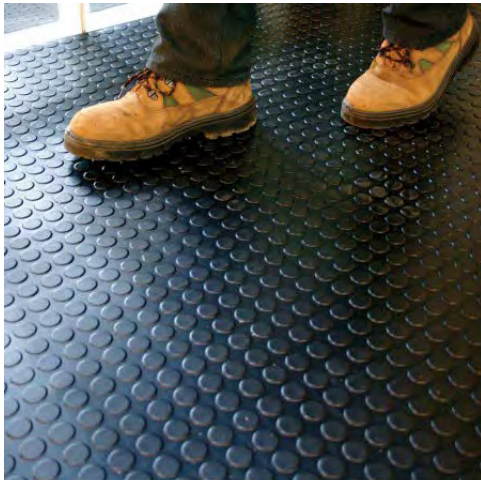

Distag QCS stock various industrial rubber sheeting produced from natural and synthetic rubbers and is of a superior quality to recycled products.

Available in 5 metre rolls, ROHS and REACH compliant.

FEATURES & BENEFITS

- Easy to handle rolls, available in 5 metre rolls.
- Easy to clean.
- ROHS and REACH compliant.
- Cut sizes available POA.

TYPES AVAILABLE

NBR - NITRILE RUBBER

Oil seals, sealing rings and gaskets, food factory bench application

- Excellent resistance to petroleum, mineral, and vegetable oils
- Good resistance to heat aging
- Good for applications that require abrasion resistance
- Good adhesion to metal
- Available in: 3mm, 4mm, and 6mm thickness
- Temperature range: -25°C to 110°C

CR - CHLOROPRENE RUBBER

- Also Known as Neoprene®, this rubber is a great multi-function rubber.
- Good strength and abrasion properties with good metal adhesion.
- Resistant to weathering with good resistance to temperature and ozone.
- Temperature range: -20°C to 110°C


EPDM- ETHYLENE RUBBER

- Excellent resistance to water, steam, ozone aging, ultraviolet light and chemicals
- Moderate adhesion to metal, great electrical protection properties
- Can be widely used, highly versatile
- Available in 2mm, 3mm, 4mm, and 6mm thickness
- Temperature range: -40°C to 120°C

SBR - STYRENE BUTADIENE RUBBER


- Anti-aging and temperature resistant
- Good tensile strength
- Moderate resistance to ozone
- Available in 2mm, 3mm, 4mm and 6mm thickness
- Temperature range: -45°C to 110°C

COLOURS AVAILABLE

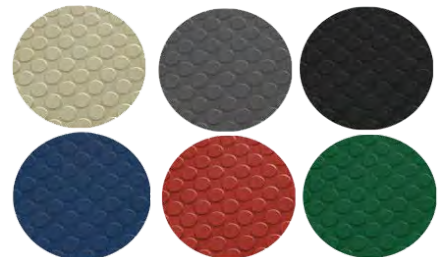

SPECIALITY RUBBER ROLLS

FOOD, DRAINAGE, INTERLOCK, STALL, ANTISTATIC, EVENT MATTING

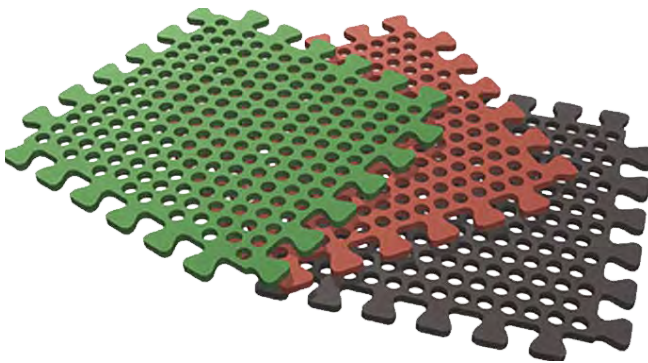

Speciality rubber matting is used in almost every industry – agriculture to cosmetics; mining to construction, and most sectors in between.

Also available in white food grade rubber rolls, sponge rubber rolls, drainage rubber rolls, and interlocked rubber rolls.

TYPES AVAILABLE

Speciality Rubber matting is used in almost every industry – agriculture to cosmetics; mining to construction, and most sectors in between.

We stock anti-static ESD rubber rolls, White Food Grade rubber rolls, Sponge rubber rolls, Drainage rubber rolls and interlocked rubber rolls.

ANTI-STATIC

Anti-static prevents effects of static electricity, so this type of rubber matting can be used in many applications, such as computer rooms, electrical engineer workstations, sensitive to electrons, used as portable protection for site engineers working on live equipment.

FOOD GRADE

Non-abrasive, long-life, easy to clean, and can be used in food, pharmaceutical, and cosmetic processing plants.

SPONGE

Rubber matting with High-temperature resistance, up to 300°C, outstanding resistance to weathering. Matting for protection, used in outdoor play areas, parks, and gyms

DRAINAGE MATS


Interlocking, high performance, anti-fatigue, modular flexibility, hardwearing and reusable mats for construction sites, trade stands, wet and damp areas.

INTERLOCKED MATS

Interlocking edges, exceptional drainage characteristics, allows water and debris to fall through, provides cushion effect underfoot, easy to install and clean, with anti-slip.

EVA STALL

FOOD, DRAINAGE, INTERLOCK, STALL, ANTISTATIC, EVENT MATTING

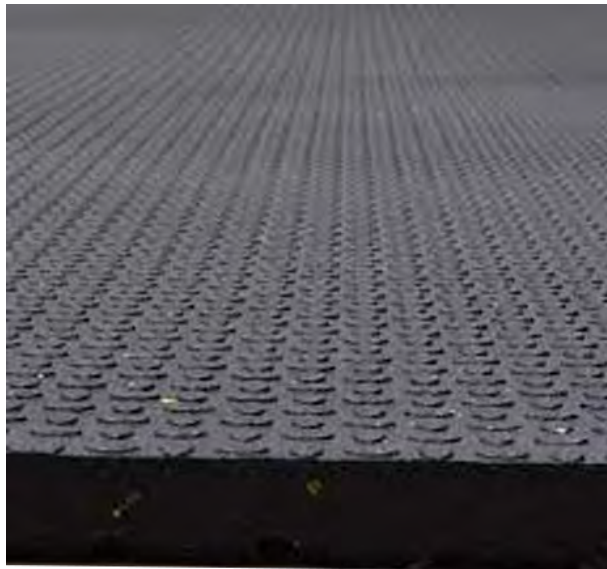

Speciality rubber matting - Eva stall matting is used in almost every industry – agriculture to cosmetics; mining to construction, and most sectors in between.

For milking parlors, horseboxes, stables, and pens. Produced to standard animal pen/box dimensions (15mm thick, 1.22m x 1.83m). Provides stress relief to animal muscles, absorbs impact.

STOCK LISTED

Code	Name
RS1007-3-3-5-12	NR/SBR Corrugated rubber sheet black 3mm x 1.2m x 5m
RS1063-3-3-5-12	NR/SBR Checker Rubber Sheet Black 3mm x 1.2m x 5m
RS1015-3-3-5-12	NR/SBR Diamond rubber sheet black 3mm x 1.2m x 5m
RS1012-3-3-5-12	NR/SBR Round dot rubber sheet black 3mm x 1.2m x 5m
RS1026-3-5-5-14	NBR rubber sheet black, thickness 3mm 3mm x 1.4m x 5m
RS1113-6-5-5-14	SBR rubber sheet black, thickness 6mm 6mm x 1.4m x 5m
RS1113-4-5-5-14	SBR rubber sheet black, thickness 4mm 4mm x 1.4m x 5m
RS1113-3-5-5-14	SBR rubber sheet black, thickness 3mm 3mm x 1.4m x 5m
RS1113-2-5-5-14	SBR rubber sheet black, thickness 2mm 2mm x 1.4m x 5m
RS1026-4-5-5-14	NBR rubber sheet black, thickness 4mm 4mm x 1.4m x 5m
RS1022-2-5-5-14	EPDM rubber sheet black, thickness 2mm 5mm x 1.4m x
RS1025-6-5-5-14	CR rubber sheet black, thickness 6mm 6mm x 1.4m x 5m
RS1025-4-5-5-14	CR rubber sheet black, thickness 4mm 4mm x 1.4m x 5m
RS1025-3-5-5-14	CR rubber sheet black, thickness 3mm 3mm x 1.4m x 5m
RS1022-6-5-5-14	EPDM rubber sheet black, thickness 6mm 6mm x 1.4m x
RS1022-4-5-5-14	EPDM rubber sheet black, thickness 4mm 4mm x 1.4m x
RS1022-3-5-5-14	EPDM rubber sheet black, thickness 3mm 3mm x 1.4m x
RS12652.51512201830	NBR/SBR Hexagon Cow Stall Matt

WWW.DISTAG.COM
Get in touch

TULLOW
Distag QCS LTD
Industrial Estate Tullow
Tullow
Co.Carlow
IRELAND
R93 V585

Tel: +353 (0)59 915 1626
Fax: +353 (0)59 915 1264
Email: sales@distag.com

IPSWICH
Distag QCS (UK) LTD
Unit 24
Farthing Road Ind.Est.
Sproughton, Ipswich
Suffolk, UK
IP1 5AP

Tel: +44 (0)1473 744 612
Fax: +44 (0)1473 744 613
Email: info@distag.com

DUNGANNON
Distag QCS (UK) LTD
11 Cookstown Rd
Dungannon
Northern Ireland
BT71 4BB

Tel: +44 (0) 28 92 633380
Fax: +44 (0) 28 92 607231
Email: Nisales@distag.com