

CATALFER

...since 1957

www.catalfer.it



2017-9



HEADQUARTER:

CATALFER S.r.l. - Via Campo di Fiori, 9 - 21020 Brunello (VA) Italy - Tel. +39 0332 463509 - Fax +39 0332 464145 - e-mail: catalfer@catalfer.it



CATALFER S.r.l. - Via Campo di Maggio, 29 - 21020 Brunello (VA) Italy - Tel. +39 0332 463509 - Fax +39 0332 464145 - e-mail: catalfer@catalfer.it

POLYESTER FILLERS

CATALFEN CN
MULTI PURPOSE POLYESTER BODY FILLER



2 Kg
Hardener included



CATALFEN LW
LIGHTWEIGHT POLYESTER BODY FILLER



1,6 Kg
Hardener included



CATALFEN PA
BLACK POLYESTER BODY FILLER

PREMIUM EASY-MIX FINISHING.
USE FOR PLASTIC AND ZINC-COATED SURFACES.




2 Kg
Hardener included



CATALFEN C
MULTI PURPOSE POLYESTER BODY FILLER

CATALFEN PA
BLACK POLYESTER BODY FILLER
PREMIUM EASY-MIX FINISHING
USE FOR PLASTIC AND ZINC-COATED SURFACES

1.5Kg.
Hardener included



FINELY PIGMENTED POLYESTER PUTTY/BODY FILLER SPECIALLY DESIGNED TO REPAIR DEEP DENTS AND SCRATCHES IN CAR BODY WORK.

FEATURES: SUITABLE FOR BOTH DEEP FILL AND FINE SKIM APPLICATION • WORKS WELL AT HIGH AND LOW TEMPERATURES • VERY EASY TO SAND, WILL NOT LOAD OR CLOG SANDPAPER • EXCELLENT ADHESION AND FEATHER EDGING FEATURES • PINHOLE FREE • NO SHRINKAGE • EXCELLENT FOR TOUCH-UP WORK • CAN BE OVERCOATED WITH ALL PRIMERS AND SURFACERS • NO RESIN FLOATING IN THE CAN • DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: Body filler IIB.b).

VETRORESINA

PREMIUM, SHORT-STRAND, FIBERGLASS REINFORCED POLYESTER KNIFING FILLER DESIGNED FOR PLUGGING, FILLING, SEALING AND REBUILDING DAMAGED PARTS IN BODY SHOP, BOATING, HANDICRAFT AND DO-IT-YOURSELF FIELDS.

FEATURES: EXCELLENT WHERE EXTRA STRENGTH IS REQUIRED • CAN BE USED ALONE OR WITH FIBERGLASS CLOTH OR MAT (FOR LARGE REPAIRS) • SUITABLE FOR BOTH DEEP FILL AND FINE SKIM APPLICATION • WORKS WELL AT HIGH AND LOW TEMPERATURES • CURES TO A NON-TACKY SURFACE IN 15-20 MINUTES • VERY EASY TO SAND, WILL NOT LOAD OR CLOG SAND PAPER • EXCELLENT ADHESION AND FEATHER EDGING FEATURES • PINHOLE FREE • NO SHRINKAGE • CAN BE OVERCOATED WITH ALL PRIMERS AND SURFACERS • NO RESIN FLOATING IN THE CAN • PACKING: 2KG. • DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: Body filler IIB.b



2 Kg
Hardener included



1K AEROSOL, "UV" AND 2K SPRAY FILLERS/SURFACERS

PLASTEHN C120

TWO-PACK HIGH SOLID SPRAY FILLER/SURFACER

TWO-PACK HIGH SOLIDS (HS) SPRAY FILLERS/SURFACERS FOR HIGH QUALITY SPOT REPAIRS OR TOTAL REPAINTING OF CARS AND COMMERCIAL VEHICLES. 1L - 3.75L CANS



PLASTEHN TK2-40

TWO-PACK HIGH SOLID SPRAY FILLER/SURFACER



FEATURES: MIXING RATIO WITH KPF HARDENER 4:1 • VERY FAST DRYING (2 HOURS APPROX. AT 20 °C) • THE USE OF TF AND TF EXTRA "ACTIVE" THINNERS ALLOWS AIR DRY IN 15-20 MIN. AT 20 °C • VERY EASY TO SAND BOTH DRY AND WET WITH ONLY ONE FINISHING PAPER (P-GRIT P320/P400 DRY AND P600-1000 WET) • HIGH FILM BUILD • VERY GOOD FLOW • EXCELLENT TOP COAT HOLD-OUT • EXCELLENT RESISTANCE TOWARDS SOLVENTS AND HUMIDITY • VERY EASY TO APPLY • CHROMATE FREE • GOOD ISOLATOR FOR OLD DOUBTFULL FINISHES • NO SHRINKAGE, CAN BE APPLIED DIRECTLY TO METAL, PROVIDING EXCELLENT GLOSS HOLDOUT • COLOURS: SPECIAL BLACK (ESPECIALLY FORMULATED ALSO FOR POOR COVERING TOP COATS), GREY AND WHITE • DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: primer IIb.c).

RELATED PRODUCTS

KPF

HARDENER FOR PLASTEHN

AP

AP-R

TF

TF EXTRA

THINNERS AND "ACTIVE" THINNERS



HB2

HIGH BUILD SPRAY GUN



STEEL MADE CAN OPENER/MIXING STICK

KPF

HARDENER FOR PLASTEHN



250 ML



1L

SUNRAY
UV-A LAMP



FONDO RIEMPITIVO HS UV-A
FÜLLER HS UV-A
APAREJO DE RELLENO HS UV-A
HS UV-A SPRAY FILLER
APPRÊT GARNISSANT HS UV-A



P180-240



SG-A ECO
WATER-BASED
ANTI-SILICONE
DEGREASER



1-2
1.2-1.7 mm
2 hr



2-4min



3-5min



P320-600
P800-1200



400-20

1K MODIFIED ACRYLIC PRIMER-FILLER IDEAL FOR PROFESSIONAL PAINTING RESULTS. FITS TO ALL REFINISHING NEEDS. FOR MINOR REPAIRS AND SURFACES WHICH HAVE BEEN PARTIALLY SANDED TO THE BARE METAL UP TO BIG PAINT JOBS (FENDER).

FEATURES: 1K AEROSOL MEANS NO NEED TO MIX PAINT OR CLEAN SPRAY EQUIPMENT • USE ON FULLY CURED PAINT, POLYESTER BODY FILLERS, GRP, AND PROPERLY PREPARED STEEL, ALUMINUM, GALVANIZED PANELS AND VARIOUS PLASTICS • VERY FAST DRYING • VERY EASY TO SAND BOTH DRY AND WET WITH ONLY ONE FINISHING PAPER (P-GRIT P400/P600 DRY AND P800-1200 WET) • EXCELLENT FILLING PROPERTIES • VERY GOOD FLOW • EXCELLENT TOP COAT HOLD-OUT • GOOD RESISTANCE TOWARDS SOLVENTS AND HUMIDITY • BY CHANGING THE NOZZLE, ACTS LIKE A SPRAY GUN • CHROMATE FREE • WORKS WITH SOLVENT AND WATERBORNE PAINT SYSTEMS • HIGH PROTECTION AGAINST CORROSION • AVAILABLE IN 5 COLOURS • 400ML • DIRECTIVE 2004/42/CE VOC COMPLIANT. PRODUCT CATEGORY: SPECIAL FINISHES IIB (e)



400-30

FORMULATED TO RESTORE ORIGINAL FINE TO MEDIUM TEXTURE FINISHES AFTER REPAIRS. OF THE PLASTIC STRUCTURE SUCH AS IN MODERN BUMPERS, INSTRUMENT PANELS, CONSOLES AND OTHER TEXTURED PLASTIC PARTS.

FEATURES: EXCELLENT ADHESION • EASY TO APPLY • HIGH ELASTICITY • VERY FAST DRYING • GOOD ADHERENCE TO THE MOST PLASTIC SURFACES • RE-COATABILITY WITH ALL PROFESSIONAL FINISHES SUCH AS 2K COLOR PAINTS AND LACQUERS BOTH 1K COLOR SOLVENT-BASED AND WATER-BASED PAINTS • AVAILABLE IN DARK GREY AND BLACK COLORS • 400ML • DIRECTIVE 2004/42/CE VOC COMPLIANT. PRODUCT CATEGORY: SPECIAL FINISHES IIB (e)



400-40

PREMIUM QUALITY 1K MODIFIED ACRYLIC SATIN BLACK PAINT. ESPECIALLY SUITED FOR ALL APPLICATIONS WHERE A DURABLE HIGH QUALITY SATIN BLACK FINISH IS REQUIRED

FEATURES: FAST DRYING • SCRATCH AND SHOCK RESISTANT • 400ML • DIRECTIVE 2004/42/CE VOC COMPLIANT. PRODUCT CATEGORY: SPECIAL FINISHES IIB (e)



2K "HS", "VHS" AND "UHS" CLEARS

FEATURES: USE IN ALL CLEAR OVER BASE/SOLID COLOUR SYSTEMS • SUITABLE FOR ALL AUTOMOTIVE REFINISHING AS WELL AS TRUCKS AND EQUIPMENT • 2:1 MIXING RATIO WITH HARDENER • HIGH FILM BUILD • SUPERIOR RESISTANCE TO SALT, HUMIDITY, PETROL, INDUSTRIAL POLLUTION, INFLUENCE OF WEATHER, ETC. • VERY GOOD FLOW • EXCELLENT HIGH GLOSS FINISH ALSO WITH COARSER METALLIC PARTICLES • LONG LASTING SHINE • NO WRINKLING OR YELLOWING • VERY EASY TO APPLY • FAST DRYING • MAY BE USED IN AIR DRY, DOWNDRAFT OR FORCE DRY APPLICATIONS • THE USE OF THE UNIQUE "ACTIVE" THINNERS WITH 20 MIN. FORCED DRYING ENABLES CUSTOMERS TO PERFORM EFFICIENT REPAIRS IN THEIR EVERY DAY REPAIR PROCESSES WITHOUT SACRIFICING DURABILITY OR APPEARANCE.



2K "UHS" CLEAR COAT

DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: Topcoat IIB.d)



4L

RELATED PRODUCTS



"UHS" HARDENER



2L



THINNER



THINNER




"ACTIVE" THINNER



FADE-OUT THINNER

arys
arys
➤ ANTI - SCRATCH ◀

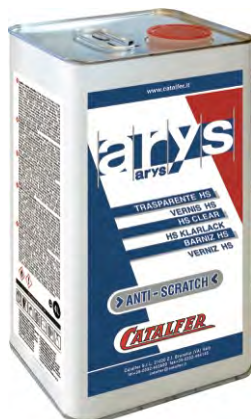

4L

aventys
➤ ANTI - SCRATCH ◀



4L

2K "HS" CLEAR COAT

DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: Special Finishes IIB.e).

RELATED PRODUCTS

arys
arys

2:1 "HS" HARDENER

KN

2:1 "HS" HARDENER



SLOW
2L



STANDARD
2L



FAST
2L



EXTRA-FAST
1L



STANDARD
2L

AP
THINNER
aventys

AP-R
THINNER
aventys

AP-R
"ACTIVE" THINNER
aventys

THESYS EFC4
FADE-OUT THINNER
arys aventys

CSR
"ACTIVE" THINNER
aventys

TF
"ACTIVE" THINNER
aventys

10060

VHS

> ANTI-SCRATCH <

2K "VHS" CLEAR COAT

DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: Special Finishes IIB.e).



4L

RELATED PRODUCTS

20080

2:1 "HS" HARDENER



SLOW
2L



STANDARD
2L



FAST
2L



EXTRA-FAST
1L



100 10

➤ ANTI - SCRATCH ◀



4L

100 30
VHS

➤ ANTI - SCRATCH ◀



4L

2K "HS" AND "VHS" CLEAR COAT

DIRECTIVE 2004/42/CE VOC COMPLIANT. Product category: Special Finishes IIB.e).

RELATED PRODUCTS

200 50

3:1 "HS" HARDENER

1,32L



SLOW



STANDARD



FAST



EXTRA-FAST

AP
THINNER

AP-R
THINNER

FADE-OUT THINNER
THESYS EFC4

THINNERS FOR 2K SPRAY FILLERS AND CLEARS



AP

MEDIUM-SLOW
EVAPORATION
RATE.

1L-4L CANS.



AP-R

“ACTIVE” THINNER
MEDIUM-FAST
EVAPORATION
RATE.

1L-4L CANS.



AP-R
Plus NA

MEDIUM-FAST
EVAPORATION
RATE.

1L-4L CANS.



CSR

“ACTIVE” THINNER. FAST
EVAPORATION RATE. TO
SHORTEN SPRAY BOOTH
DRYING TIMES UP TO 60%.
SPEEDS THROUGH DRYING.
SPOT REPAIRS ON SIDE
PANELS ONLY 1L CANS.



TF

SUPER FAST
EVAPORATION RATE



TF
EXTRA

EXTRA FAST
EVAPORATION RATE

ACRYLIC THINNER FOR 2K SPRAY FILLER/SURFACERS, ENAMELS AND CLEARS. FORMULATED WITH CHEMICALLY PURE RAW MATERIALS. HIGH THINNING POWER, VERY SMALL AMOUNTS ARE REQUIRED TO OBTAIN SPRAY VISCOSITY.

“ACTIVE” THINNER. SUITABLE FOR SPOT AND SMALL/MEDIUM REPAIRS, ONE/TWO-COAT APPLICATION AND FOR ALL PAINT SHOPS WHICH CANNOT REACH SUFFICIENTLY DRYING ROOM TEMPERATURES DURING THE COLD PART OF THE YEAR. USE WITH PLASTEHN C120 AND TK2•40 TO SHORTEN DRYING TIMES. SPEEDS THROUGH DRYING. 1L CAN..



THESYS EFC1

EASY FLOW COMPOUND.
MEDIUM-SLOW EVAPORATION
RATE.

1L CAN.



THESYS EFC2

EASY FLOW COMPOUND.
MEDIUM-FAST EVAPORATION
RATE.

1L CAN.



THESYS EFC3

EASY FLOW “ACTIVE” COMPOUND
FAST EVAPORATION RATE.
SHORTENS SPRAY BOOTH
DRYING TIMES UP TO 60%.
SPEEDS THROUGH DRYING,
MASKING STABILITY AND
POLISHABILITY. NO RISK OF TOP
COAT WRINKLING OR
YELLOWING. 1L CAN.



THESYS EFC4

FADE-OUT COMPOUND.
1L CAN.

MISCELLANEOUS

SG-AECO

ANTI-SILICONE

WATER-BASED DEGREASER

VOC=65g/l

- SUITABLE FOR USE IN HIGH QUALITY PAINTING CYCLES ON METAL AND PLASTICS, TO DEGREASE, CLEAN AND ELIMINATE ALL TRACES OF SILICON AND SIMILAR CONTAMINANTS FROM OLD FINISHES AND FROM SURFACES COATED WITH SPRAY FILLERS OR PRIMERS, BOTH SINGLE AND TWO-PACK. NOT SUITABLE TO REMOVE BITUMEN.
- ANTI-STATIC PROPERTIES: REDUCES THE AMOUNT OF DUST CONTACT BY NEUTRALIZING STATIC CHARGE.
- NON-AGGRESSIVE. USEFUL FOR SENSITIVE SURFACES.
- DIRECTIVE 2004/42/CE VOC COMPLIANT. PRODUCT CATEGORY: Preparatory and cleaning IIb.a)

USE WITH:



1L

USE WITH:



5L

ANTI-SILICONE
WATERBORNE
PUMP DISPENSER



CATALTEKH

LASER BODYPACK

HIGH GRADE RUBBER AND SYNTHETIC RESIN BASED COATING FOR SILLS, DOORSKINS, WHEELARCHES, UNDERBODIES, CHASSIS, ETC.

FEATURES: FORMS A TOUGH PROTECTIVE FILM AGAINST CORROSION AND RUST DUE TO MOISTURE, ROAD SALT AND NORMAL FORMS OF ATMOSPHERIC ATTACK AND FROM ABRASION CAUSED BY GRAVEL AND STONE CHIPPINGS • READY FOR USE WITH STANDARD SCHUTZ GUN, GRAVITY FED SPRAY GUN FOR FLATTER FINISH OR BY BRUSH • WILL NOT RUN OR SAG • WILL NOT CRACK WITH AGE OR IN CASE OF EXTREME WEATHER CONDITIONS • EXCELLENT SOUND DEADENING PROPERTIES • CAN BE OVERCOATED WITH ALL FINISHES INCLUDING CLEAR OVER BASE SYSTEM • ASBESTOS AND BITUMEN FREE • COLOURS: BLACK, DARK GREY AND WHITE



1L

RELATED PRODUCTS



LX 105

CATALFLEX 10

MS POLYMER

MOISTURE CURING, ADHESIVE SEALANT BASED ON MS POLYMER TECHNOLOGY. CURES TO AN ELASTIC, ABRASION RESISTANT PRODUCT.

FEATURES: CAN BE BRUSH APPLIED, REPLICATES OEM STRUCTURE • ISOCYANATE, SILICONE AND PVC FREE • FLEXIBLE AT LOW (-40°C) AND HIGH (+100°C) TEMPERATURES WILL NOT SHRINK OR CRACK • ODOURLESS • NON-CORROSIVE • GOOD ADHESION TO PLASTICS, POLYESTER, METALS, PRIMERS AND TOP COATS (PREVIOUS TESTS ARE RECOMMENDED) • CAN BE OVERPAINTED IMMEDIATELY AFTER SKINNING WITHOUT ANY NEGATIVE EFFECTS ON SEALANT CURING AND/OR PAINT PROPERTIES • GOOD PAINT COMPABILITY • SAG RESISTANT • FAST THROUGH CURING • HIGH AGEING PERFORMANCE AND UV RESISTANCE • SPOTWELDABLE IF NOT CURED • APPLICATION AREAS: ESPECIALLY RECOMMENDED FOR THE SEALING OF AUTOMOBILE SEAMS, OVERLAPS AND WELDS IN THE ENGINE COMPARTMENT, BOOT, PASSENGER CABIN • DUE TO THE VIBRATION-DAMPING AND SOUNDPROOFING PROPERTIES CAN ALSO BE USED ON LARGER AREAS TO REPAIR OR SUBSTITUTE UNDERBODY OR STONE CHIP PROTECTION COATINGS, E.G.: FENDERS, DOOR SILLS, BOOTS • 290ML CARTRIDGE, 600ML SAUSAGE • COLORS: BLACK AND GREY



CATALFLEX SPRAY

MS POLYMER

MOISTURE CURING, MULTI-FUNCTIONAL, LOW VISCOSITY, "3-IN-1" SPRAYABLE SEALANT BASED ON MS POLYMER TECHNOLOGY. CURES TO AN ELASTIC, ABRASION RESISTANT PRODUCT.

FEATURES: WITH THE EASY-TO-USE SPECIAL AIR DRIVEN GUN AND OR BY BRUSH, REPAIRED SEAMS REPLICATES OEM STRUCTURE • ISOCYANATE, SILICONE AND PVC FREE • FLEXIBLE AT LOW (-40°C) AND HIGH (+100°C) TEMPERATURES WILL NOT SHRINK OR CRACK • ODOURLESS • NON-CORROSIVE • GOOD ADHESION TO PLASTICS, POLYESTER, METALS, PRIMERS AND TOP COATS (PREVIOUS TESTS ARE RECOMMENDED) • CAN BE OVERPAINTED IMMEDIATELY AFTER SKINNING WITHOUT ANY NEGATIVE EFFECTS ON SEALANT CURING AND/OR THE PAINT PROPERTIES • GOOD PAINT COMPABILITY • SAG RESISTANT • SPRAYABLE AND BRUSHABLE • FAST THROUGH CURING • HIGH AGEING PERFORMANCE AND UV RESISTANCE • SPOTWELDABLE IF NOT CURED • APPLICATION AREAS: ESPECIALLY RECOMMENDED FOR THE SEALING OF AUTOMOBILE SEAMS, OVERLAPS AND WELDS IN THE ENGINE COMPARTMENT, BOOT, PASSENGER CABIN • DUE TO THE VIBRATION-DAMPING AND SOUNDPROOFING PROPERTIES CAN ALSO BE USED ON LARGER AREAS TO REPAIR OR SUBSTITUTE UNDERBODY OR STONE CHIP PROTECTION COATINGS, E.G.: FENDERS, DOOR SILLS, BOOTS • 290ML CARTRIDGE, 600ML SAUSAGE • COLORS: GREY AND YELLOW OCHER



CATALFLEX V30

MS POLYMER

CERTIFIED
BY THATCHAM
FMVSS212
ONE HOUR
TWO AIRBAGS

ONE COMPONENT MOISTURE CURING, HMLC WINDSCREEN STRUCTURAL ADHESIVE-SEALANT BASED ON MS POLYMER TECHNOLOGY. CATALFLEX V30 IS EXPRESSLY SUITABLE FOR FAST STRUCTURAL BONDING AND SEALING OF WINDSCREENS AND WINDOWS IN THE VEHICLE PRODUCTION AND RECONDITIONING INDUSTRY.

FEATURES: ISOCYANATE AND SOLVENT FREE • NO SHRINKAGE • FLEXIBLE AT LOW (- 40°C) AND HIGH (+ 120°C) TEMPERATURES • ODOURLESS • EXCELLENT AGEING PERFORMANCE AND UV RAYS RESISTANCE • RAPID CURING: BONDING PARTS CAN BE HANDLED A FEW HOURS AFTER ASSEMBLY • EXCELLENT PRIMERLESS ADHESION ON WINDSCREENS AND ON A WIDE RANGE OF MATERIALS COMMONLY USED IN VEHICLE BODY SHOPS AND SHIPYARDS, SUCH AS ZINC COATED SHEETS, ALUMINUM, FIBERGLASS, STAINLESS STEEL • NO CONTACT CORROSION ON ALUMINUM SURFACES • IDEAL FOR INTEGRATED WINDSCREEN ANTENNAS • AUTOMOTIVE: CRASH TESTED AND CERTIFIED FOR WINDSCREEN INSTALLATION REPLACEMENT BY THATCHAM ACCORDING TO FMVSS212, TEST N° 1604WRT, 60 MINUTES WITH TWO AIRBAGS (BONDING STRENGHT 100%) • 290ML CARTRIDGE, 600ML SAUSAGE • COLORS: BLACK





IDEAL FOR REMOVING STUBBORN DIRT FROM HANDS • FORMULATED WITH NATURAL INGREDIENTS, THIS DEEP-CLEANER PENETRATES EVEN THE FINEST LINES OF THE SKIN • GREAT CLEANSING POWER • EASY RINSING, SAVES TIME REQUIRED FOR HAND WASHING • OVER 90% BIODEGRADABLE • CONTAINS VERY FINE POLYURETHANE GRANULES • KEEPS SKIN SOFT • NON-AGGRESSIVE • DOES NOT CLOG DRAINS • SILICONE-FREE.

USE WITH:



WALL DISPENSER



4.5L



1



2




3



4



5

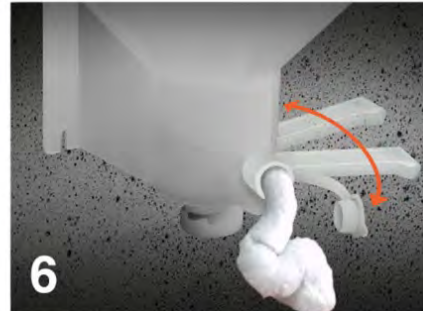

6



500 ML



PAINT HAND CLEANER

HEAVY-DUTY PAINT HAND CLEANER • CONTAINS VERY FINE POLYURETHANE GRANULES WHICH ADDS TO THE CLEANING ABILITY AND GLYCERIN SKIN CONDITIONER • IDEAL FOR REMOVING STUBBORN DIRT FROM HANDS • FORMULATED WITH NATURAL INGREDIENTS, THIS DEEP-CLEANER PENETRATES EVEN THE FINEST LINES OF THE SKIN • EASY RINSING • KEEPS SKIN SOFT • NON-AGGRESSIVE • DOES NOT CLOG DRAINS • SILICONE-FREE • ELIMINATES: FRESH 2K PAINT, FRESH POLYURETHANE SEALANT, FRESH PRIMER ADHESIVE, 1K PAINT (SOLVENT AND WATERBORNE BASE COAT).



5L

POLISHING PRODUCTS



SM

SUPER COARSE POLISHING COMPOUNDS, BASED ON HIGH ONE STEP QUALITY WAXES AND ABRASIVES, DESIGNED TO RESTORE AND POLISH THROUGH DRIED AND CURED PAINT FILMS AND TO REMOVE ACCUMULATED TRAFFIC FILM, SMALL SCRATCHES, ORANGE PEEL, SEVERE OXIDATION, LIGHT SPRAY MIST • CAN BE HAND OR MACHINE APPLIED • DOES NOT NEED TO KEEP THE SURFACE WET THROUGHOUT COMPOUNDING OPERATION • IDEAL PRE-TREATMENT FOR CATALUX POLISH • AMMONIA FREE • SOLVENT BASED FORMULATION



500ML



XPA 50

ONE STEP POLISHING RUBBING COMPOUND - COARSE

XPA 250

ONE STEP POLISHING RUBBING COMPOUND- MEDIUM

XPA 400

ONE STEP POLISHING RUBBING COMPOUND - FINE



1Kg



1L



1L

A PRODUCT LINE THAT EXCELS IN OVERALL PERFORMANCE • POLISHING COMPOUNDS, BASED ON HIGH QUALITY WAXES AND HIGHLY SELECTED, SUPER HARD, ABRASIVES, DESIGNED TO RESTORE AND POLISH THROUGH DRIED AND CURED PAINT FILMS • AGGRESSIVE ABRASIVES BOOST CLEANING POWER AND EFFICIENCY WITH NO-SWIRL COMPOUND • ADDS REMARKABLE DEPTH OF COLOR AND GLOSS ON DARK PAINTS • NO-DUSTING, LOW-SPLATTER • CAN BE HAND OR MACHINE APPLIED • DOES NOT NEED TO KEEP THE SURFACE WET THROUGHOUT COMPOUNDING OPERATION • IDEAL PRE-TREATMENT FOR **CATALUX POLISH F** • AMMONIA FREE



POLISH F

FINE

PREMIUM CARNAUBA WAX BLENDED WITH NO VOLATILE HIGH TEMPERATURE TREATED SILICONE, POLYMERS AND OTHER WAXES • SPECIALLY DESIGNED FOR NEW OR COMPOUNDED FINISHES • OUTSHINES ALL OTHER HAND APPLIED POLISHES, GLAZES, WAXES AND SEALANTS • LIGHT ABRASIVE ACTION • PROVIDES HIGH GLOSS AND LONG LASTING PROTECTION WITH MINIMUM EFFORT • ADDS REMARKABLE DEPTH OF COLOR AND GLOSS ON DARK PAINTS • DOES NOT DRY WHITE • BUFFING RESIDUE WIPES OFF EASILY • LEAVES A DIRT BARRIER AND VEHICLE EASY TO CLEAN • USE BY HAND WITH POLISHING CLOTH. COLOR: PINK • SOLVENT BASED FORMULATION



500ML



POLISH M

MEDIUM FINE

TO RESTORE HIGH GLOSS OF DULL AND SLIGHTLY WEATHER-WORN PAINTWORK • CLEANS, POLISHES AND PRESERVES IN ONE OPERATION • ADDS REMARKABLE DEPTH OF COLOR AND GLOSS ON DARK PAINTS • BUFFING RESIDUE WIPES OFF EASILY • LEAVES A DIRT BARRIER AND VEHICLE EASY TO CLEAN. USE BY HAND WITH POLISHING CLOTH. COLOR: WHITE • SOLVENT BASED FORMULATION



500ML



CATALUX POLISH F

NON-ABRASIVE - VOC=0

PREMIUM CARNAUBA WAX BLENDED WITH NO VOLATILE HIGH TEMPERATURE TREATED SILICONE, POLYMERS AND OTHER WAXES SPECIALLY DESIGNED FOR NEW OR COMPOUNDED FINISHES • PROVIDES LONG LASTING PROTECTION • LEAVES A DIRT BARRIER AND VEHICLE EASY TO CLEAN. USE BY HAND WITH POLISHING CLOTH • ADDS REMARKABLE DEPTH OF COLOR AND GLOSS ON DARK PAINTS • COLOR: BLACK • WATER BASED FORMULATION



500ML

colorCLEAN

FAST AND EASY SPRAY ON-WIPE OFF DETAILER THAT CLEANS PAINTED SURFACES FOR A SHOWROOM SHINE



1L



5L

- LIGHT GREEN, BLEND OF WAXES, RESINS AND WATER.
- QUICKLY REMOVES COMPOUND DUST AND OTHER POLISHING RESIDUES, SMUDGES, FINGERPRINTS AND SMEARS FROM PAINT, GLASS AND CHROME ALL WHILE LEAVING A HIGH GLOSS, SHOW-CAR QUALITY SHEEN.
- REMOVES POLISHING OILY MARKS ALLOWING THE WET FILM TO FLOW BACK TOGETHER.
- REMOVES EMBEDDED COMPOUND, WAX AND GLAZE RESIDUE FROM BODY SIDE MOLDINGS, EXTERIOR TRIM, RUBBER, ETC.
- SUITABLE FOR ALL FINISHES. BOTH REFINISHED AND OEM.
- FRESH PAINT AND CLEAR COAT SAFE. **NON-ABRASIVE**.
- WATER-BASED, NON-STAINING, ETCHING OR DUSTING. VOC=0.
- ANTI-STATIC, NO RESIDUE TO ATTRACT DUST OR TRANSFER TO CLOTHING.
- TOGETHER WITH SKC MICROFIBER CLOTH (P/N°85618), WILL NOT SCRATCH OR STREAK, EVEN IN DIRECT SUN.
- PERFECT FOR SPOT CLEANING OR "DRY WASHING" TO REMOVE DUST.

Reflex

GLOSS ENHANCER



500ML



5L

- LIGHT BLUE, BLEND OF WAXES, NEW GENERATION OF RESINS AND WATER FOR EXTENDED PAINT PROTECTION.
- DESIGNED TO INCREASE GLOSS, SLICKNESS AND ADD COLOR DEPTH TO NEW, PREVIOUSLY COMPOUNDED OR POLISHED PAINTED SURFACES.
- FAST AND EASY SPRAY ON-WIPE OFF FORMULATION.
- SUITABLE FOR ALL FINISHES. BOTH REFINISHED AND OEM.
- WATER-BASED, NON-STAINING OR DUSTING. VOC=0.
- ANTI-STATIC. NO RESIDUE TO ATTRACT DUST OR TRANSFER TO CLOTHING.
- **NON-ABRASIVE**. TOGETHER WITH **SKC** MICROFIBER CLOTH (P/N°85618), WILL NOT SCRATCH OR STREAK, EVEN IN DIRECT SUN.
- NON-GREASY FORMULA WITH UNIQUE HIGH SLIP FEEL. USE AS A WAX REPLACEMENT.

POLISHING ACCESSORIES



150X30



160X30



160X30



160X30

RECESSED VELOUR FOR NO BALANCING PROBLEMS



160X25



160X25



160X25



85X25



77x25



77x25



77x25

**LOW PROFILE
HARD**

POLISHING FOAM.
USE FOR COARSER
POLISHING APPLICATION.

**LOW PROFILE
MEDIUM-HARD**

POLISHING FOAM.
USE FOR MEDIUM COARSE
POLISHING APPLICATION.

**LOW PROFILE
MEDIUM-SOFT**

POLISHING FOAM
USE FOR FINER POLISHING
APPLICATION.

**LOW PROFILE
SUPER-SOFT**

POLISHING FOAM
USE FOR SUPER FINE
POLISHING APPLICATION.

HIGH DENSITY NON-ABSORBENT POLISHING FOAMS SPECIFICALLY DESIGNED FOR USE WITH POLISHING COMPOUNDS (E.G. CATALUX AND XPA PRODUCT RANGE) TO PRODUCE HIGH GLOSS ON PAINTED SURFACES • ENSURE MAXIMUM EFFICIENCY FROM THE COMPOUNDS • CENTERING HOOK&LOOP ATTACHMENT SYSTEM • EXCELLENT DURABILITY • TO BE USED WITH POLISHING MACHINE • TEAR RESISTANT



DIA.77



DIA.150



DIA.77 - LOW-AIR



DIA.160 - LOW-AIR

POLISHING WOOL PAD

BLENDED BUFFING/FINISHING PAD MADE WITH A MIX OF WOOL AND SYNTHETIC MATERIALS • SUPERIOR CUTTING POWER COMPARED TO FOAM PAD • AGGRESSIVE CUTTING ACTION WITHOUT LEAVING TYPICAL DIFFICULT TO REMOVE SWIRL MARKS • SAFER AND EASIER TO CLEAN COMPARED TO CONVENTIONAL WOOL PAD

SKC SPECIAL KNIT CONSTRUCTION MICROFIBRE POLISHING CLOTH cm: 40X40



USE WITH

MICROFIBRE POLISHING CLOTH

THESE PREMIUM, LINT-FREE CLOTHES ARE A COMBINATION OF MICROFIBERS AND UNIQUE KNIT CONSTRUCTION FOR SAFE, EFFECTIVE CLEANING ON THE MOST DELICATE SURFACES. ALLOW PICK UP OF DUST, OIL, WATER AND DIRT IN ONE PASS. WIDE RANGE OF USES IN THE MANUFACTURING PROCESS AND MAINTENANCE OF STAINLESS STEEL, CHROME, PAINTED SURFACES, PLASTICS, GLASS, MIRRORS, WINDOWS, COMPUTER MONITORS, WOOD, MARBLE, ETC.. cm: 32X32



USE WITH



POLISHING FOAM PAD CLEANER



MDN
MAGNETIC DE-NIBBING DEVICE



SPRAY GUNS + ACCESSORIES

HB2
HIGH BUILD PRIMER FILLER SPRAY GUN

USE WITH

TK2-40
TWO-PACK HIGH SOLID SPRAY FILLER, SURFACER

PLC
SPOT REPAIR PROFESSIONAL SPRAY GUN

USE WITH

XEON
FONDO BIEPPITTORE ARI UV
SPRANNO DE BIELLENDI ARI UV
SPRITZ GELNITSCHANT ARI UV

10030 VHS
ANTI RIFLESSO
ANTI SPACCATO
ANTI SCALFO
ANTI RIFLESSO
ANTI SPACCATO
ANTI SCALFO
ANTI RIFLESSO
ANTI SPACCATO
ANTI SCALFO

arentys
TRASPARENTE ARI
A RI CLEAR
A RI CLEAR
A RI CLEAR
A RI CLEAR

10060 VHS
ANTI RIFLESSO
ANTI SPACCATO
ANTI SCALFO
ANTI RIFLESSO
ANTI SPACCATO
ANTI SCALFO
ANTI RIFLESSO
ANTI SPACCATO
ANTI SCALFO

CS
"3-IN-1" SPRAYABLE SEALANT GUN

USE WITH

CATALFLEX SPRAY
ADESIVO SIGILLANTE ELASTICO - ELASTIC ADHESIVE SALANT - MASTIC ADHESIF
ELASTIQUE - ELASTISCHER DICHTKLEBSTOFF - ADHESIVO SELLADOR ELASTICO
MS POLYMER™ TECHNOLOGY

ARM
AIR REGULATOR. ALUMINIUM MADE BODY WITH STEEL AND GLASS MADE GAUGE

USE WITH

HB2 **PLC**

SPRAY GUN AND FILTER HOLDER



NOZZLE multi-key

USE WITH

HB2

PLC



LX 105

USE FOR UNDERBODY COATING AND SOUND-DEADENER

USE WITH:



LXE 105

ADJUSTABLE NOZZLE • DISPOSABLE • PLASTIC MADE

SPRAY GUN
CLEANING SET.

SUITABLE FOR ALL SPRAY GUNS



Catalfer S.r.l. 21020 Z.I. Brunello (VA) Italy Tel +39-0332-463509 Fax +39-0332-464154 e-mail:catalfer@catalfer.it



CAN OPENER- MIXING STICK • USE WITH 3.5-4.5L CAN.

QUPGEAR-DRIVEN
AIR MINI POLISHERDIA.
75 (3")

WEIGHT: 600GR.

WORKING PRESSURE:
6BAR (90PSI)

2.500 RPM FREE SPEED

rpe 4•226-PEED
ELECTRICAL
POLISHERDIA.
150 (6")DIA.
115 (4½")INPUT POWER: 1300W
FREE SPEED: 400-2200rpm
SPINDLE THREAD: M14
WEIGHT: 3KG**RELATED PRODUCTS**

POLISHING PRODUCTS AND ACCESSORIES PAGE 16-19

FOR FURTHER INFORMATION ON P/N° AND PRODUCT AVAILABILITY OR IF YOU DON'T SEE WHAT YOU'RE LOOKING FOR, ALWAYS REFER TO THE PRICE LIST IN FORCE OR CONTACT OUR OFFICE.

This brochure could include technical or other mistakes, inaccuracies or typographical errors. CATALFER srl makes no commitment to update the technical and/or commercial features which may be out of date.

Pictures may not be exact product match.

CATALFER Srl reserves the right to make modifications at any time without giving notice in advance.

CATALFER Srl si riserva il diritto di modificare il presente elenco prodotti senza preavviso.

CATALFER Srl se réserve le droit de modifier cette liste de produits sans préavis.

CATALFER Srl se reserva el derecho de modificar esta lista de productos sin previo aviso.