


ELEMENTS OF CIVIL ENGINEERING

Dr. K. Prakash
Professor & Head



Department of Civil Engineering
Sri Jayachamarajendra College of Engineering, Mysore – 570006.

1st Edition – 2007

2nd Edition – 2013

3rd Edition – 2015

FOREWORD

The role of Civil Engineering in the societal development through infrastructural development projects is gaining more importance in the recent days. All engineering students irrespective of their branch are expected to have some information about the field of Civil Engineering. This volume intends to give some basic information about the field of Civil Engineering, Infrastructural Development Projects and Typical Infrastructural Facilities. It is hoped that this volume satisfies the requirement of the students admitted afresh to the engineering education.

K. Prakash

CONTENTS

	Page No.
• Foreword	iii
• Contents	v
1. Civil engineering and infrastructure development	1
2. Roads	11
3. Bridges	26
4. Dams	36

Chapter – 1
CIVIL ENGINEERING AND INFRASTRUCTURE DEVELOPMENT

INTRODUCTION

Engineering is the profession that puts scientific knowledge to practical use. i.e., Engineering is an applied science. Engineers look for better and optimized ways to use existing resources and often develop new resources & new materials.

In general, the field of engineering includes a wide variety of activities. Engineering projects range from the construction of huge dams to the design of tiny electronic circuits. Engineers may help to produce guided missiles, industrial robots, or artificial limbs for the physically handicapped. They develop complex scientific equipments to explore the reaches of outer space and the depths of the oceans. Engineers also plan electric power and water supply systems, and deal with automobiles, television sets, and other consumer products. They work to reduce environmental pollution, increase the world's food supply, and make transportation faster & safer.

Out of all branches of engineering, Civil Engineering is the one that is directly associated with the welfare of the society. 'Civil Engineering', a branch full of human activities, has been pursued from very early times when man began to adapt the environment to his needs. The motto of the civil engineering is the "protection of the welfare and safety of the public". Indeed, the term civil in civil engineering refers to the discipline's involvement in public works, including government buildings, military bases, mass transit systems (i.e., highways, railways, airports, and water ways), water treatment works, waste management, irrigation etc. In ancient times, there was no formal engineering education. The earliest engineers built structures and developed tools by experience and by methods which were empirical in nature. However, the present day engineering activities are based on sound theoretical knowledge. Guided by theory and the past experience, the present day civil engineers work for the benefit of the society, carrying out the works according to certain standards. Maintaining the quality in their works help them to achieve good performance from their outputs.

SCOPE OF CIVIL ENGINEERING

The scope of Civil Engineering is very vast, and it has many diversified fields which help in the total development of any civilisation. Various subdivisions that come under civil engineering branch are listed below.

- Surveying
- Building Materials Technology
- Geotechnical Engineering
- Structural Engineering
- Construction Technology
- Hydraulics
- Water Resources and Irrigation Engineering
- Transportation Engineering
- Environmental Engineering

A brief description of the contents of study of each of these sub-divisions is given below

- ***Surveying***

It is a field of specialisation which involves processes through which the relative positions of various points or objects on the earth's surface are determined on a horizontal plane as well as on a vertical plane. The results of such processes are represented in the form of map or plan. A plan is a graphical representation of various ground features as projected on a horizontal plane, to some convenient scale, on a sheet of paper.

Surveying is an essential work which is carried out in the beginning of any constructional activity, such as development of an area, construction of transportation facilities such as road ways, railways and air field pavements, construction of structures such as buildings, bridges, dams and the like.

Conventional methods of surveying include chain surveying, compass surveying, theodolite surveying, plane table surveying and levelling. The modern day surveying, by virtue of developments in technology, include the use of sophisticated instruments like total station and other electronic, electro-magnetic, electro-optical instruments and tools such as

Geographic Information System (GIS), Global Positioning System (GPS) and the like. It also makes use of allied fields such as remote sensing and photogrammetry.

- ***Building Materials Technology***

Any constructional activity invariably requires the use of different types of materials. These materials of construction can be broadly classified in to

- Conventional materials (Ex: soil, stones, bricks, timber, cement / lime, tiles, plain and reinforced cement concrete, pre-stressed concrete).
- Modern building materials (Ex: Fibre reinforced concrete, aluminium, glazed tiles, plaster of Paris).
- Alternate building materials (Ex: Fly ash, polymeric materials, industrial wastes, recycled aggregates).
- Smart materials.

Depending upon the requirement, budget and other constraints, any combination of these materials can be used in the construction works. Building materials technology deals with a detailed study of these materials of construction – origin / fabrication / manufacture, types, properties, functional advantages, limitations. These information help in judging the suitability of different materials to be used in the proposed constructional activity.

- ***Geotechnical Engineering***

All structures built on earth transfer the superimposed loads to the ground (soil / rock) underneath, through appropriate foundation. Soils are complex geological materials which are expected to receive the loads transferred to them safely without causing damage to the structure. The soils are physico-chemically active materials, and their engineering behaviour depends upon their water content. This subject encompasses

- a detailed study of soils – formation, composition, properties and their determination
- a detailed study of rocks – types, properties, strength and deformation characteristics and their determination.
- different types foundations, their relative merits and limitations, suitability and design aspects.
- design and analysis of various earth structures such as embankments, dams, retaining walls etc.

- site investigation, sub-soil exploration and field tests.
- Ground improvement techniques

Geotechnical earthquake engineering is a specialised field of geotechnical engineering, which deals with earthquakes, their effects on foundation soil, different types of seismic hazards, study of dynamic soil properties, seismic design of earth structures, soil improvement to withstand / minimise seismic hazards etc.

- ***Structural Engineering***

All structures constructed on this earth are subjected to various types of loads of different complexities / nature. Various components of a structure are expected to respond to these loads favourably and to withstand them safely. The satisfactory performance of structures requires the knowledge of materials' behaviour and selection of appropriate material for use, proportioning / designing different components of a structure, estimating the stresses developed in different component of a structure and back checking the design. This field includes subjects like engineering mechanics, strength of materials, structural analysis and design of structures. It also requires the knowledge of different tools to carry out the analysis and design of structural components such as matrix method of analysis, finite difference techniques, finite element method of analysis and the like.

- ***Construction Technology***

All activities undertaken in the construction of any structure come under this field. Construction of various types of structures, making use of various types of constructional materials available, study of different technologies of construction, management of various constructional activities with respect to different parameters like resources (material / human), time, finance and legal aspects are included in this field of civil engineering.

- ***Hydraulics***

Water is an integral part of human life and of almost all constructional activities. This subject deals with

- basic properties of water
- study of water at rest as well as in motion
- flow through pipes
- open channel flows

- flow measurements
- different analytical, computational and experimental approaches to analyse the flow problems.

- ***Water Resources and Irrigation Engineering***

There are different sources of fresh water on this earth such as rain, ground water, streams / rivers. These waters have to be harnessed and stored properly before they are utilised for different purposes such as drinking, irrigation and water power generation. This subject deals with

- different sources of water on this earth
- estimation of total water available and water requirement
- construction and maintenance of structures to tap the available resources of water
- planning and building of water retaining structures such as tanks / dams
- construction and maintenance of water carrying structures
- different irrigation schemes
- flood control methodologies
- depletion and replenishment of water resources

- ***Transportation Engineering***

The social and economical development of any country is a function of transportation facilities available in that country. Different means of transportation include roadways, railways, air ways and water ways. This field deals with a detailed study of planning, design, construction and maintenance of different types of road ways, railways, airports and runways, harbours and docks, bridges and tunnels.

- ***Environmental Engineering***

This subject deals with

- study of available water quality and checking against the standards
- water collection and water purification through various treatment processes
- supply and distribution of quality water for urban and rural areas, for domestic and industrial usage
- study of domestic water supply system and sanitary system
- waste water collection, treatment and safe disposal
- study of wastes and waste management

- study of different kinds of pollution and pollution control measures
- study of environmental safety

INFRASTRUCTURE

Infrastructure is a system of services and communication that is required for the overall development of the society. It refers to facilities such as transportation (i.e. Railways, Highways, Air ways, Water ways etc.), hospitals, education, energy (coal, electricity, oil etc.), irrigation, farm equipments & machineries, science and technology, communication, health & hygiene, banking that facilitate and contribute in the process of production of goods and services for the overall development of the economy of the society.

The infrastructure is of two types.

- a) Economic infrastructure:** It contributes directly to the economic development of any country. It consists of transport and communication, power supply, irrigation networks, financial institutions etc.
- b) Social infrastructure:** It contributes to the process of economic development of any country indirectly. It consists of education & training, health & family welfare, housing & water supply and other civic amenities.

Transport and Communication:

In this modern age, transport along with electricity and power forms the basic infrastructural requirement for industrialization. Transport provides vital link between production centres and distribution points. It also exercises a unifying and integrating influence upon the economy. Indeed, transport facilitates agricultural development by supply of modern inputs like seeds, chemical fertilizers, pesticides, farm implements and machinery. Transport helps the movement of agricultural produce from scattered farms to the distant markets. It helps the industrial development by facilitating the regular and prompt movement of raw materials and labour to the factories and finished products to market. It helps to widen the market for wide variety of industrial goods. Transport helps to widen the market and trade. It facilitates exploitation of natural resources, helps the mobility of labour, and serves administration and defence requirements.

The important means of transport are railways, roadways, waterways and airways. The importance of transport services in economy depends on several economic factors such as interdependence, mutual co-operation and co-existence of different regions. Therefore, to integrate diversified economic regions within the country and economies of the world, a well developed network of transport system is of vital importance.

Railways provide an economical mode of transport for freight over long distances. The roadways are most ideal transport for short distance travel and light freight and to cater to diverse points of production, distribution and consumption. Well-constructed roads have become main components of economic infrastructure today. The other main components of transport network in the economy along with roads and railways are coastal shipping, inland waterways and domestic airlines.

Communication means imparting or transmission of information. The difference between transport and communication is that while the former implies the conveyance of goods and passengers from one place to another, the latter implies the conveyance of information. The conveyance of information is necessary for the development of industry, commerce and trade of any country. Today, a very large network of communication media exists. These include postal services, telegraph and the telephone, radio and television (Doordarshan), tele printers, telex, fax services, the cinema and the press. The responsibility of building and extending the services is fixed to specialized departments and agencies like postal department, telegraph department etc.

The communication network is also claimed to be formed under social infrastructure of the economy. Communication can also be seen as a service in imparting education.

Education:

Education plays a vital role in the process of production; because, it imparts knowledge, skills and capabilities to people. Investing precious resources on education and training leads to definite economic returns, just like investing on any productive activity. Better training and reliable research will produce better human capital.

Over and above the basic skills imparted by primary education, the growing economy needs the secondary and much higher skills for its human resources. These can be imparted

only to those who can pick them up in their respective fields. Thus, not everybody can be trained to be a good mechanic or a good foreman. Such specialized skills can be met only by high-level educational institutions like Training Institutes, Colleges and Universities from the point of view of developing the economic resources. More than the expansion of higher education at a greater expenditure, strengthening training and research are greatly needed. Otherwise, the educated unemployment will increase, and it becomes a serious problem.

Housing:

This involves providing a good neighbourhood with civic amenities of living such as water supply, sewerage, roads, electricity, schools, parks besides safety and comforts to lead a peaceful life. Housing can either reduce or enhance the disparities in society. Social status of any individual directly depends upon housing he / she owns.

Health & family welfare:

The provision of health services in a country reflects nation's social priorities. The policy programmes adopted by any country for health services have economic implications. The emphasis should be placed on general public health measures, better sanitation and drinking water rather than making provisions to have expensive treatment facilities to cater only a few. The family welfare programmes also contribute a lot to the over all economy of the country.

ROLE OF CIVIL ENGINEERS IN INFRASTRUCTURAL DEVELOPMENT

The role of Civil Engineers lies in planning the work meticulously and carrying out the designed works systematically to achieve the most optimal and efficient output that help the common people to lead a satisfactory life. They are also responsible for the regular maintenance of the works carried out by them. Following illustrations explain the complexities involved in the works to be carried out by a civil engineer.

Civil Engineering constructions vary from very simple routine works to very complicated, huge structures. Everything depends upon the prevailing site conditions which may or may not be favourable for the construction. Environmental conditions, location of the site, site & soil conditions and the like may contribute to all kinds of problems, in addition to unforeseen circumstances which may suddenly creep in. A civil engineer has to think calmly

and take judicious and practicable decisions, considering all alternates and their pros and cons.

Civil engineering is much more than erecting skyscrapers or bridges. The civil engineers must have a thorough understanding of the interaction among the various units of construction, among the various structural elements, between the structure and the complex environment. Since constructing a large building or public-works project can involve elaborate planning, civil engineers can be outstanding project managers. They sometimes manage thousands of workers. They also develop advanced computerization and planning policies.

In addition, many civil engineers are also involved with preserving, protecting, or restoring the environment. A growing number of civil engineers are involved in many sensitive and hazardous projects involving huge money such as cleaning up toxic industrial or municipal wastes at abandoned dump sites, reclamation of unsuitable sites for construction, rehabilitation of old / heritage structures, maintaining national forest parks, and restoring the land around mines, oil wells, or factories.

In total, a civil engineer has to perform the role of a planner, a builder, an architect, a management expert, and also an arbitrator.

IMPACT OF INFRASTRUCTURAL DEVELOPMENT

The overall development of any country is directly dependent on the infrastructural facilities made available to the people of the country. The positive impact of developing good infrastructural facilities can be summarised as indicated below.

- Self sufficiency in food sector can be achieved
- Foreign exchange can be saved
- Export of surplus food products industrial products is possible.
- Unemployment can be reduced through increased job opportunities
- Prevention of unhealthy urbanisation can be prevented, which in turn solves many problems such as urban congestion, acute housing shortage, traffic problems, crimes, pollution etc.
- Per capita income is increased.
- The living standards of people can be enhanced.
- Public health can be improved

- Inflation can be reduced.
- Draught and flood related problems can be controlled / minimised
- Pollution can be controlled
- Literacy level of people can be increased
- Public awareness gets improved

On the other hand, ill planned, ill executed and ill maintained infrastructure development projects have negative impact on the society. Some of them are listed below.

- Small scale industries, handicrafts industries and rural industries are adversely affected.
- Fuel consumption is increased, which has direct impact on foreign exchange.
- Environmental pollution (air, water and ground pollution) continues to increase.
- The culture of the society can be adversely get affected.
- Literacy level of people will come down.
- Health related problems can be on the rise.
- Labour problems will increase.
- Inflation will increase.

If the infrastructure developments are urban centered, then that will lead to uncontrolled urbanisation. This will aggravate the urban housing problems, water supply and sanitation problems and urban traffic congestion. This may also result in an increase in the crime rate.

If the infrastructural facilities provided are rich people oriented, then the gap between the rich and poor will continue to widen. This results in an unhealthy society, full of crimes and unrest.

~~*~*

Chapter – 2

ROADS

The economic, industrial, social and cultural development of any country is directly linked with the transportation facilities existing in that country. Following are the four major modes of transportation.

* Roadways * Railways * Waterways * Airways

Each of these modes have their own merits and limitations. However, the transportation through roadways is the only mode which gives maximum service to the users, because of the flexibility and freedom it offers to the users.

Some Definitions

Terrain: It is the landscape. As per IRC, it can be classified as in Table 1.

Table – 1: Classification of Terrain

% cross slope of the ground	Classification
0 – 10	Plain / Level
10 – 25	Rolling
25 – 60	Mountainous
> 60	Steep

Formation: It is the ground surface obtained for the construction of road after the earth works are over.

Road: It is a solid and convenient path over which vehicular traffic takes place lawfully.

Pavement: It is the surface structure over the soil sub-grade constructed in order to provide smooth and comfortable ride for the vehicles.

HIGHWAY CROSS SECTIONAL ELEMENTS

1. *Carriage way (Pavement) (Fig. 1)*: It is that part of a road which carries vehicular traffic. Its width depends upon the width of the vehicle, minimum side clearance to be provided for safety and number of lanes. (* The carriage way intended for one line of traffic movement is called a traffic lane). It should be sufficient enough to carry the design traffic. Hence, there can be a single lane or more lanes of traffic. The widths of carriage way for roads with different lanes are given in Table 2.

Table 2: Widths of carriage way (as per IRC)

No. of lanes	Width of carriage way
Single lane	3.75 m
Two lanes without raised kerbs	7 m
Two lanes with raised kerbs	7.5 m
Multi – lane pavements	3.5 m per lane

Note:

- i. On unimportant roads, an intermediate carriage way of width 5.5 m may also be adopted instead of a regular two lane width.
 - ii. On village roads, the lower limit of the width of carriage way of a single lane is 3 m.
2. *Shoulder (Fig. 1)*: It is a strip of land provided on either side of the carriage way, which has sufficient strength to support a loaded truck in wet weather. It serves
 - as an emergency lane for parking break-down vehicles
 - as a service lane
 - sometimes, for over taking

It is desirable to have a minimum shoulder width of 4 – 6 m. As per IRC, the minimum shoulder width is 2.5 m.

3. *Road way width (Width of formation) (Fig. 1)*: It is the total width of carriage way together with shoulder on either side. It is nothing but the finished top width of the earth work in cutting or in embankment. For divided highways, it includes the central medians also. The standardised widths of roadway are listed in Table 3.

Table 3: Width of road way for different classes of roads (as per IRC)

Class of road	Road way width: m	
	On plain and rolling terrain	On mountainous and deep terrain
National and State Highways		
a. Single lane	12	6.25
b. Two lane	12	8.8
Major district roads		
a. Single lane	9	4.75
b. Two lanes	9	–
Other district roads		
a. Single lane	7.5	4.75
b. Two lane	9	–
Village Roads		
Single lane	7.5	4

4. *Right of way (Road land width) (Fig. 1)*: It is the land acquired for the road along its alignment. While deciding it, cost of the land and future plans of upgrading the proposed road should also be kept in mind. Table 4 lists the right of way for different classes of roads.

Table 4: Recommended right of way for different classes of roads in m

Class of road	Plain and Rolling Terrain				Mountainous and steep terrain	
	Open area		Built-up area		Open area	Built-up area
	Normal	Range	Normal	Range	Normal	Normal
NH & SH	45	30-60	30	30-60	24	20
MDR	25	25-30	20	15-25	18	15
ODR	15	15-25	15	15-20	15	12
VR	12	12-18	10	10-15	9	9

5. *Traffic separator (Fig. 2)*: It is a strip of land that may be provided on the road, which helps to prevent head-on collisions between the vehicles moving in opposite directions on adjacent lanes (in which case it is called as median or dividing island), to channalise the traffic at intersections, to segregate slow traffic and to protect pedestrians. These are normally 3 – 5 m wide.
6. *Parking lanes (Fig. 2)*: Normally, these are provided on urban roads for parking vehicles. A width of about 3 m is normally required for these lanes.
7. *Cycle tracks (Fig. 2)*: These are provided in urban areas where the volume of cycle traffic on the road is very high. Minimum width suggested for these tracks is about 2m.
8. *Foot paths (Side walks) (Fig. 2)*: These are the path ways provided on either side of the road exclusively for the movement of pedestrians. These are provided to protect the pedestrians from accidents. Minimum width of foot path should be about 1.5 m.
9. *Kerb*: It is the boundary between the pavement and shoulder / footpath / parking space. It may be of hard stone or of good quality precast concrete. In urban regions, it is describe to provide kerbs.

COMPONENT OF A PAVEMENT / ROAD

Based on their structural behaviour, pavements can be of two types namely, flexible pavements and rigid pavements.

Flexible pavement: It has four components (i) Soil sub-grade (ii) Sub-base course (iii) Base course (iv) Surface course (Fig. 3)

Sub grade: It is the natural soil on which the roads are constructed. It can also refer to the top of the embankment over which the pavement is laid. The surface of the sub-grade is generally known as formation. Entire load of the structure and that of traffic on the road surface are ultimately transferred to the sub-grade. If natural sub-grade is not of good quality, it requires strengthening through compaction.

Sub-base course: The layer which is immediately above the sub-grade is the sub-base. It consists of granular materials (naturally occurring / compacted / stabilized with cement or lime). This layer shall be stronger than sub-grade. It performs the following functions.

- It distributes the traffic loads to sub-grade underneath

- It acts as a good drainage layer
- It prevents moisture migration from the sub-grade upwards

Natural sand, murrum, gravel, crushed stone, crushed concrete, laterite etc. can be the granular material constituents of sub-base course.

Note: The provision of sub-base course is optional and situation dependent. If the traffic loads are heavy and the sub-grade quality is low, the design thickness is more. In such cases, it becomes inevitable to provide the sub-base course.

Base course: This is the main load bearing layer, underlying the wearing or surface course. The material of the base shall be of high quality. It is normally made of crushed / broken aggregates mechanically interlocked by rolling and bonded together with screenings, soil binder and water (Water Bound Macadam). The main function of this layer is to withstand the high traffic loads imposed at the surface and to distribute them to the underlying layers of the pavement.

Surface course (Wearing course): It generally consists of a binder course (normally bituminous macadam) and a 2 – 5 cm thick bituminous surface dressing. The functions of this surface are

- to withstand the stresses induced by the traffic, without undergoing unacceptable deformations.
- to prevent the ingress of water (i.e. water proofing the base course)
- to provide a smooth, skid resistant riding surface.

Rigid Pavement: It has 2 – 3 components – Natural sub-grade, base course (optional) and cement concrete slab (Fig. 4). The cement concrete slab itself can serve as a wearing surface as well as an effective base course.

Some Definitions

Carpet: It is nothing but the top surface of a pavement consisting of coarse aggregates of 12.5 and 10 mm sizes, pre-mixed with bitumen or tar binder compacted to a thickness of 20 mm.

For good performance, this course has to be covered by a suitable seat coat such as premixed sand – bitumen seat coat before opening to traffic.

Camber (Cross Slope) (Fig. 5): It is the slope provided to the road surface in the transverse direction to drain off the rain water from the road surface.

Super elevation (Fig. 6): Whenever a vehicle negotiates a horizontal curve on the road, by virtue of its speed, it is subjected to a centrifugal force which tends to throw the vehicle away from the centre of curvature of the curve. To counteract this effect, the outer edge of the road / pavement is raised with respect to the inner edge throughout the length of the horizontal curve. This transverse slope given to the pavement surface is known as super elevation or cant or banking.

Berm (Fig. 7): It is the horizontal stretch of land left at the ground level between the toe of an embankment and the top edge of cutting, provided to ensure the stability of a long slope.

CLASSIFICATION OF ROADS

Roads can be classified based on different criteria.

I. Based on administrative jurisdiction and function:

- Primary System
 - Express way
 - National Highway (NH)
- Secondary System
 - State Highway (SH)
 - Major District Roads (MDR)
- Tertiary System
 - Other District Roads (ODR)
 - Village Roads (VR)

Note: Highways are nothing but roadways having certain minimum standards

- ***Express way***

These are special category of highways with superior facilities and design standards, meant for very high volume of traffic at high speed. They are provided with divided carriage ways, controlled access, grade separations at intersections and fencing. Parking, loading and unloading of goods and pedestrian traffic are not permitted on these highways. They come under the jurisdiction of central or state government depending upon whether the route is a national highway or a state highway.

- ***National Highway (NH)***

These are the arterial roads of the country for inter-state and strategic traffic. They connect national and state capitals, major ports, railway junctions and border. All national highways are designated through numbers.

Ex: NH3: National Highway connecting Atari to Manali

NH21: National Highway connecting Jaipur to Agra

NH44: National Highway connecting Srinagar to Kanyakumari

Fig. 8 shows the cross section of a NH in rural area.

- ***State Highway (SH)***

These are the arterial roads of a state for inter-district traffic. They link the national highways and highways of adjacent states, state capital with district headquarters, important cities within the state. Sometimes, these may carry heavier traffic volume. The national and state highways have same design speed and geometric design specifications. Fig. 8 shows the cross section of a SH in rural area.

- ***Major District Roads (MDR)***

These are the roads within a district, for intra-district movements. They connect places of production and market within the district and connect highways in a district. These have lower speed and geometric design specifications than the national and state highways. Fig. 9 shows the cross section of a Major District Road.

- ***Other District Roads (ODR)***

These serve to connect rural areas of production with the market centres, taluk head quarters and other main roads. They have lower design specifications than MDR. Fig. 10 shows the cross section of an ODR.

- ***Village Roads (VR)***

They connect villages with each other and with the nearest district roads, state and national highways. Fig. 10 shows the cross section of a VR.

II. Based on their suitability for usage during different seasons of the year:

- All weather roads
- Fair weather roads

- ***All weather roads***

These roads are negotiable during all weather except at major river crossings.

- ***Fair weather roads***

The traffic on these roads may be suspended during monsoon season due to flooding of the roads.

III. Based on the type of road pavement:

- Paved roads
- Unpaved Roads

- ***Paved roads***

These roads are provided with hard pavement course.

- ***Unpaved Roads***

These roads are not provided with hard pavement course. The earth roads and gravel roads belong to this category.

IV. Based on the type of pavement surfacing

- Surface roads
- Unsurfaced roads

- **Surface roads**

These roads are provided with bituminous or cement concrete surface.

- **Unsurfaced roads**

These roads are not provided with bituminous or cement concrete surface.

CLASSIFICATION OF URBAN ROADS

Roads in the urban areas form a separate class altogether and are classified into

- Arterial roads
- Sub-arterial roads or major roads
- Collector streets or minor roads
- Local streets

- **Arterial roads** (Fig. 11)

These roads pass within the city limits and link the state and national highway system with a limited access. They include ring road, by-pass road etc. These roads connect major suburban centres and central business areas with residential areas. Parking, loading and unloading activities on these roads are regulated. Pedestrian crossings are allowed only at intersections. No residential buildings are allowed along these roads.

- **Sub-arterial roads** (Fig. 11)

These roads are similar to arterial roads except that they have a lower level of traffic mobility.

- **Collector streets** (Fig. 11)

These roads link the residential areas, business and industrial areas with the arterial / sub-arterial roads. Parking restrictions on these streets will not be there except during peak hours of traffic.

- **Local streets** (Fig. 11)

These are the roads that connect residences, shops and industries among themselves and with each other. There are not restrictions of parking or pedestrian movements on them.

SOME USEFUL INFORMATIONS

1. *Bus bays* (Fig. 12): These are the parking spaces for buses or other vehicles at stops, provided to avoid hindrance to the moving traffic. These should be situated at least 75 m away from road intersections.
2. *By-pass*: This is a stretch of road on which through traffic is high, which is provided in such a way as to avoid entering a township or a place of traffic congestion that hinders the traffic. This is required for an uninterrupted traffic movement.
3. *Ring Road* (Fig. 13): This is a circumferential road provided around a city or its inner part, which can be used as a by-pass. The purpose of this is to avoid hindrance to through traffic on highways from the high intra-city traffic and to provide smooth flow of traffic.
4. *Radial Roads* (Fig. 13): These are the roads that connect the central busy area with the ring road or with the outskirts of an urban area.
5. *Drive ways*: These are the paths that connect the highways with the commercial establishment like fuel statistics, services stations etc.
6. *Service Road (Frontage road)*: This is a minor road parallel to the main road, providing access to local facilities such as shops, without obstructing the main road traffic. It is connected with the main road at selected point only. Access to the service road should be provided at intervals of not less than 400 m.
7. *Sub-way*: It is an underground passage for pedestrians or to accommodate pipe lines / cables / sewers etc.
8. *Flyover*: It is a structure where the traffic at different levels move separately without provision for in interchange between them. It is a road way carried over the top of another road way at an intersection.
9. *Loop road* (Fig. 14): It is a one-way turning roadway that curves about 270° to the left to accommodate a right turning movement.


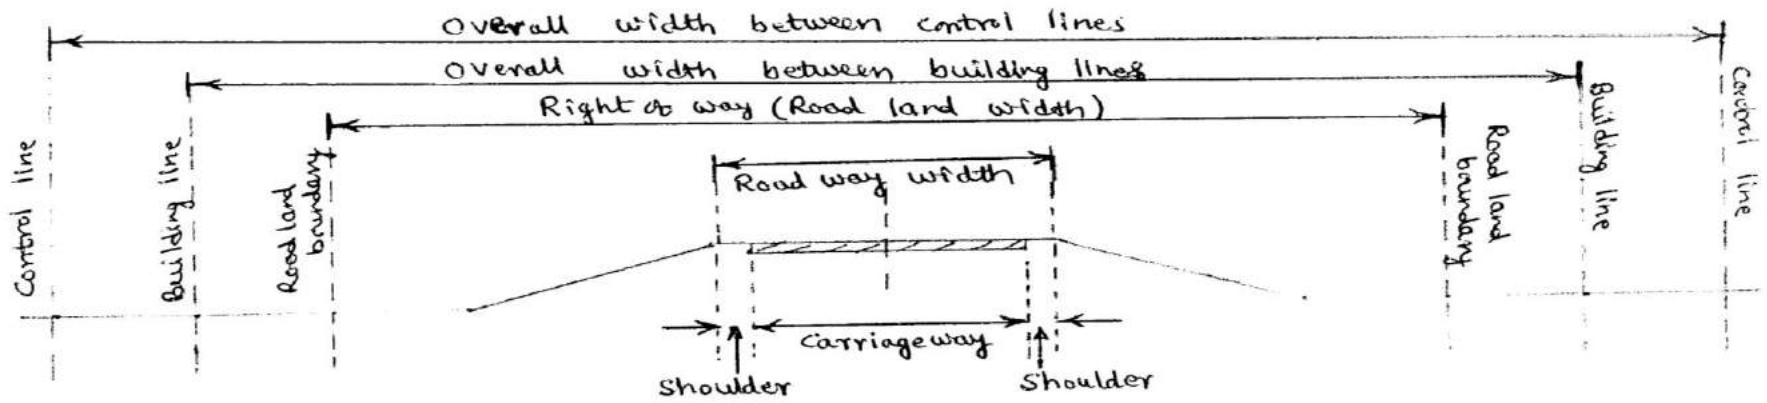


Fig. 1. Different widths of a roadway - illustrated

Fig. 2. Two-way highway in urban region

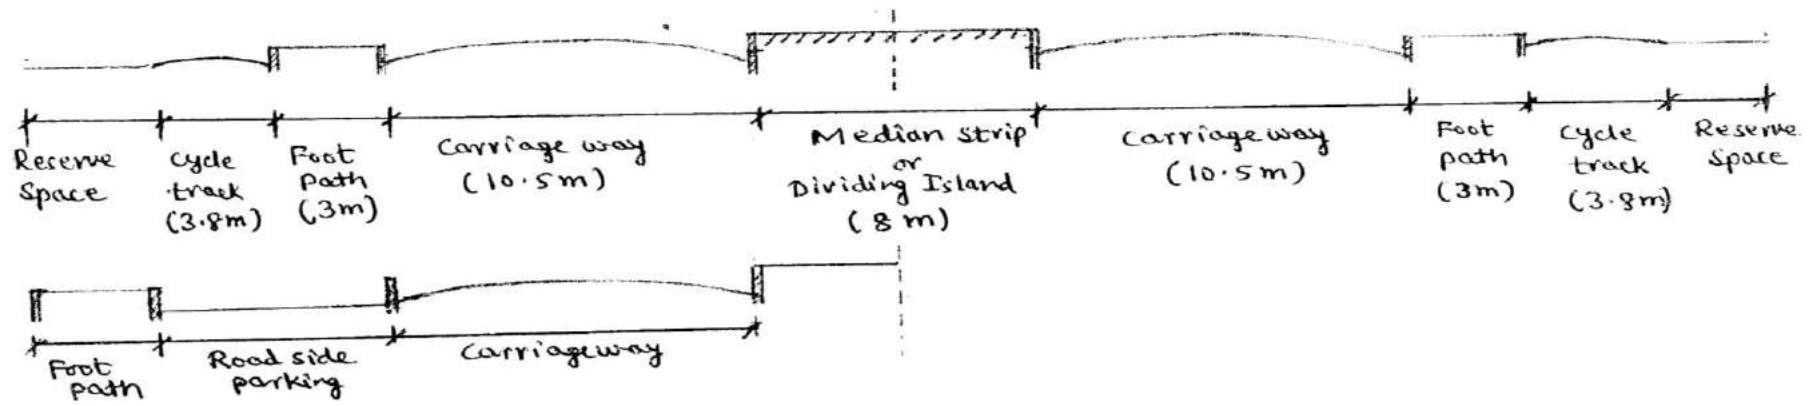

K. Prakash

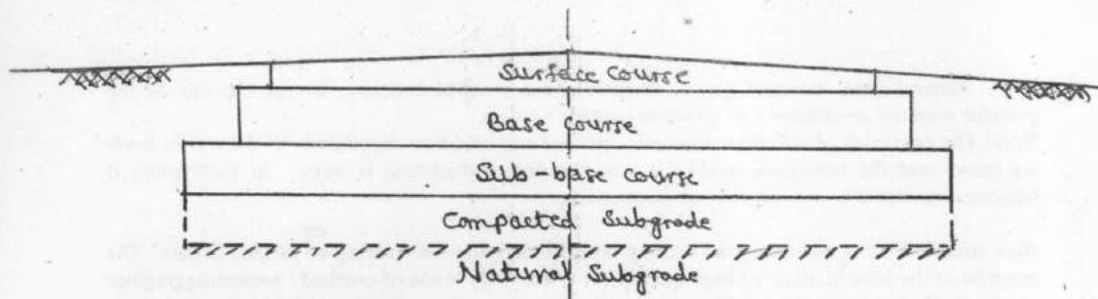


Fig. 3. Components of a flexible pavement.



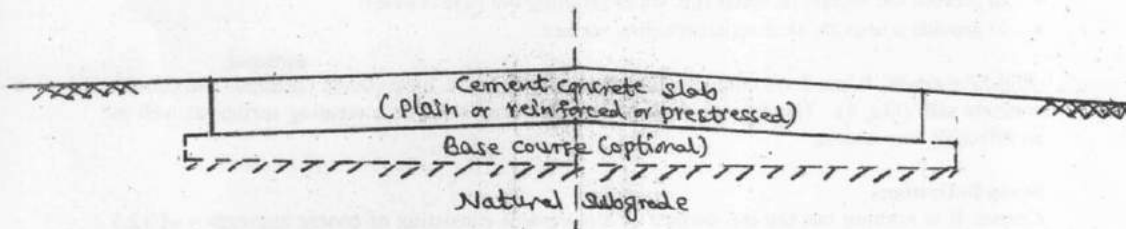


Fig. 4. Components of a rigid pavement.

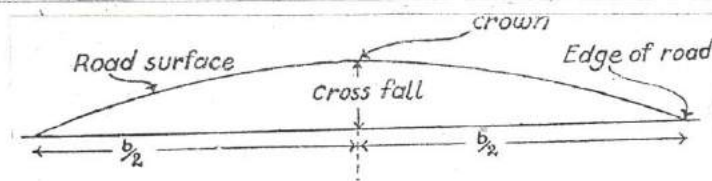


Cross section of a road showing the crown and the parabolic profile of the road surface

(a) Barrel or Parabolic Camber.



Cross section of a road showing the crown and the straight profile of the road surface

(b) Linear or Sloped Camber.

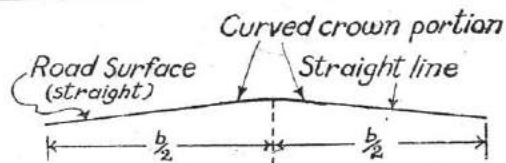

Cross section of a road showing the crown and the road surface having a composite (i.e. parabolic and straight) profile

(c) Composite Camber.

Fig. 5. Types of Camber.

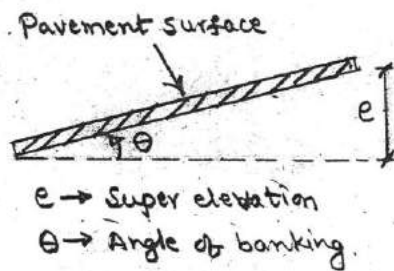


Fig. 6. Super elevation of a road way.



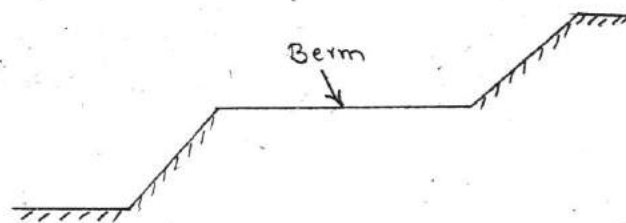


Fig. 7. Berm-illustrated.

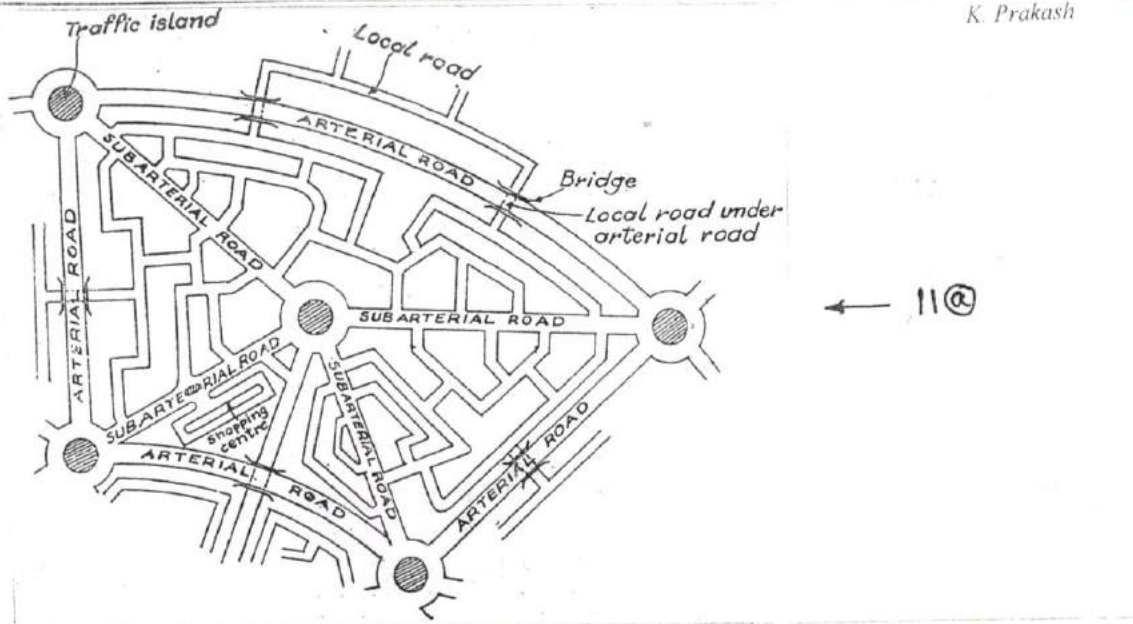

← 11(a)

11(b) →

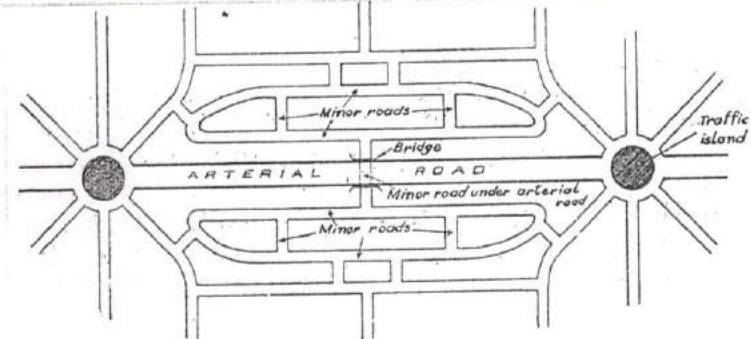

← 11(c)




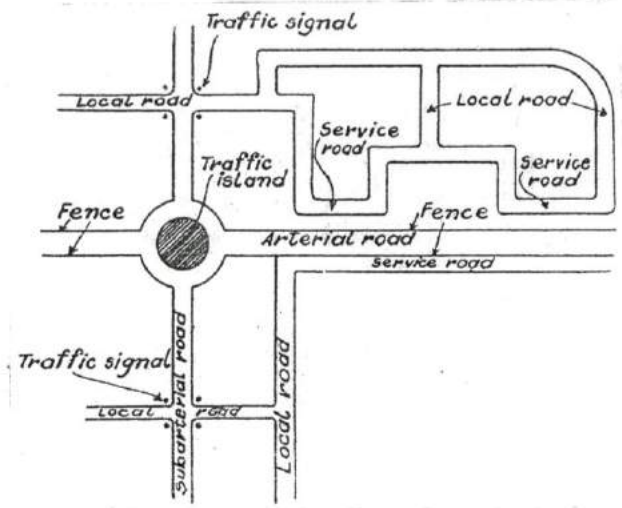


Fig. 11. Urban Roads

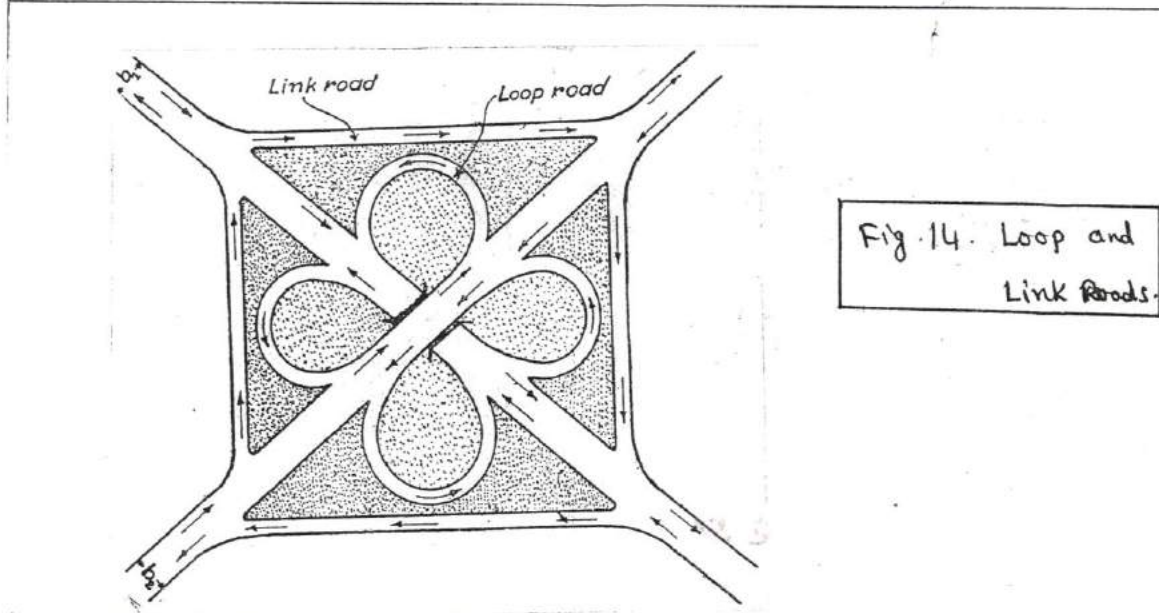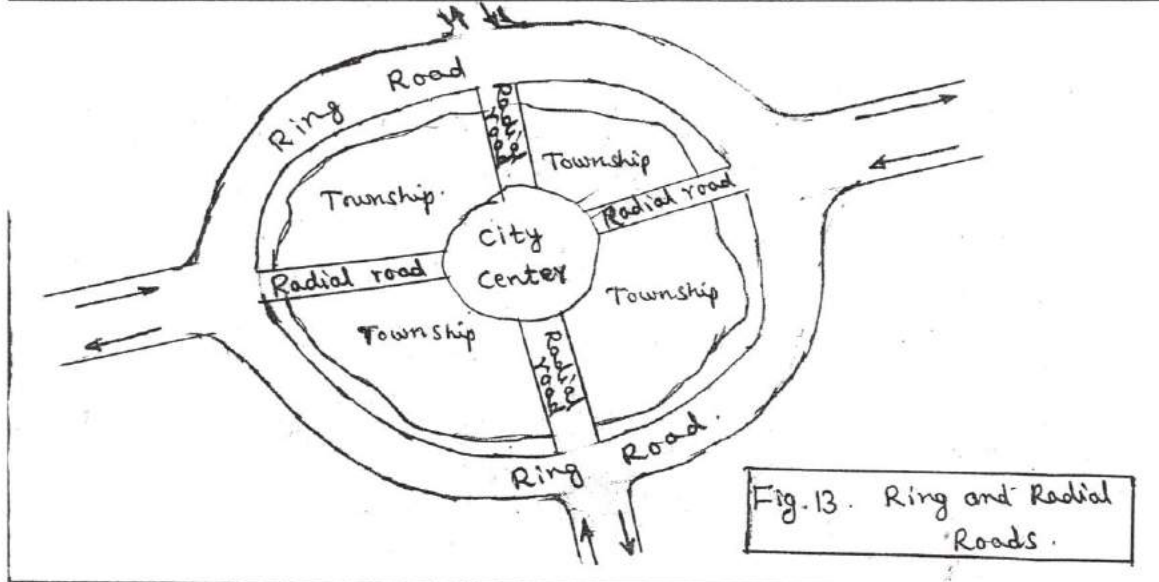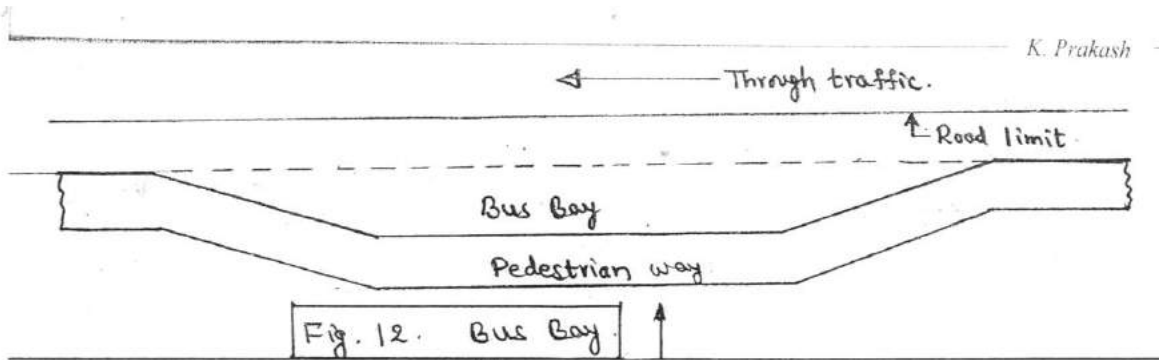

~~*~*

Chapter – 3 BRIDGES

Introduction

A bridge is a structure that provides passages for a road, railway, pedestrians, canal or a pipeline over an obstacle without closing the way beneath. The obstacle to be covered may be a river or a road or a railway or a valley.

Classification of bridges

Classification – I: According to function:

- Foot bridge (Pedestrian bridge)
- Road bridge
- Railway bridge
- Pipeline bridge
- Viaduct
- Aquaduct

Note:

1. Aquaduct is a bridge carrying a canal constructed over a drainage / passage underneath.
2. Viaduct: It is a bridge constructed over a valley.

Classification – II: According to the materials of construction:

- Timber bridge
- Masonry bridge
- Iron bridge
- Steel bridge
- RCC bridge
- Pre-stressed concrete bridge
- Composite bridge

Classification – III: According to type of super structure:

- *Slab bridge* (Fig. 1): Slabs (i.e. flat structural element) are placed across an open to carry the super-imposed loads by bending action. These are used up to spans of 10 m.
- *Beam bridge*: In this bridge, two or more rectangular beams or T-beams or I-beams are placed parallel to one another over the piers. T-beam bridges are used for the spans 10-25 m.
Note: Normally a combination of beam and slab is adopted for bridges (i.e. beam and slab bridge) (Fig. 2).

- *Truss bridge* (Fig. 3): This consists of trusses which are nothing but frame works built up of straight members which carry the loads either by axial tension or axial compression. This bridge can be used economically in the span range 100 – 200 m.
- *Arch bridge* (Fig. 4): The arch bridge is best suited to deep gorges with steep rocky banks which furnished efficient natural abutments to receive heavy thrusts exerted by the ribs. Steel arch bridges are used in the span range 100 – 250 m. Ex: Rainbow Bridge at Niagara Falls, USA
- *Bow-string girder bridge* (Fig. 5): It is an arch bridge with the feet of arch ribs are connected by a horizontal beam. These bridges are used where unyielding abutments for arch action are not available. They are used in the span range 30 – 35 m.
- *Suspension bridge* (Fig. 6): In this bridge, floor of the bridge is suspended from a pair of cables hung in the form of catenary between two tall supports. These bridges are best suited for spans more than 500 m. Ex: Golden Gate Bridge, Sanfrancisco, USA
- *Cable stayed bridge* (Fig. 7): It is a bridge whose deck is suspended by multiple cables that run down to the main girder from one or more towers. These bridges are suitable in this span range 200 – 900 m. Ex: The Stromsund Bridge, Sweden

Classification – IV: According to the span:

- Simple bridge
- Continuous bridge
- Cantilever bridge. Ex: Howrah Bridge, Kolkata, India

Classification – V: According to the position of the bridge floor relative to super structure:

- *Deck bridge* (Fig. 8): In this bridge, the road deck is carried on the top of the super structure or on the top of the supporting girders.
- *Half-through bridge (Pony type bridge)* (Fig. 9): In this bridge, the deck is provided at the middle of the super structure or mid way between top and bottom beam flanges and the load is transferred to the girder through the web of the girder.
- *Through bridge* (Fig. 10): In this bridge, the deck is supported at the bottom of the super structure or supported by the bottom beam flange of the main supporting girders provided on either side.

Classification – VI: According to the method of connecting different parts of the super structure (For steel bridges):

- Welded bridge
- Riveted bridge
- Pin connected bridge

Classification – VII: According to road level relative to highest flood level of the river below:

- High level bridge (non-submersible bridge / under-flow bridge): This bridge is capable of allowing the design flood discharge without getting submerged.
- Submersible bridge (Over-flow bridge): These bridges are not subjected to submergence under ordinary floods. However, during high floods, water spills over the deck of the bridge.
Note: Cause way: This is an elevated paved road formed between the retaining walls on either sides, taken sufficiently deep to withstand scour action. During floods, water flows over the road surface.

Classification – VIII: According to the method of clearance for navigation:

- *High level bridge*
- *Movable – bascule bridge* (Fig. 11): In this bridge, main girders are lifted together with the deck about the hinge provided at one end of the span. Ex: London Tower Bridge, UK, Railway Bridge at Mandapam near Rameshwaram, India
- *Movable – swing bridge* (Fig. 12): In this bridge, the girders and the deck can be swung about its middle over the middle pier, clearing the span on either side for the passage of ships. Ex: Railway Bridge at Fort Madison, Iowa
- *Lift bridge* (Fig. 13): In this bridge, gantries are provided at the piers on either end of the span and entire girder and the floor system is lifted up by a hydraulic arrangement to the extent required for the free passage of the ship. Ex: Cape Cod Canal Bridge at Buzzards Bay, Massachusetts, USA; Road bridge across Mathanchery channel at Cochin.
- *Transporters bridge* (Fig. 14)

Classification – IX: According to span length:

- Culvert: Culverts are cross drainage structure with clear span < 8 m.
 - *RCC slab culvert* (Fig. 15): This is used for spans up to 8 m.
 - *Stone arch culvert* (Fig. 16):
 - *Box culvert* (Fig. 17): This is used for spans up to 4 m.
 - *Pipe culvert* (Fig. 18): This is used a cross drainage work on a road / railway embankment when the drainage through the culvert is small.
 - *Steel girder culvert* (for railways) (Fig. 19)
- Minor bridge (8 m – 30 m span)
- Major bridge (> 30 m span)
- Long span bridge (> 120 m span)

Classification – X: According to life span of bridges:

- Temporary bridge
- Permanent bridge

Classification – XI: According to alignment:

- *Square bridge* (Fig. 20): If the axis of the bridge is perpendicular to the axis of the stream / obstacle over which it is constructed, then such a bridge is called a square bridge.
- *Skew bridge* (Fig. 21): If the axis of the bridge is not perpendicular to the stream / obstacle over which it is constructed, then such a bridge is called a skew bridge.

Note:

- **Under bridge:** It is a bridge constructed to allow a road to pass underneath. The top of the bridge may be used for railway traffic or for laying pipe lines over the road.
- **Over bridge:** It is a bridge constructed such that a road way is over the bridge and the way beneath the bridge can be an obstacle or can be used for railway traffic.

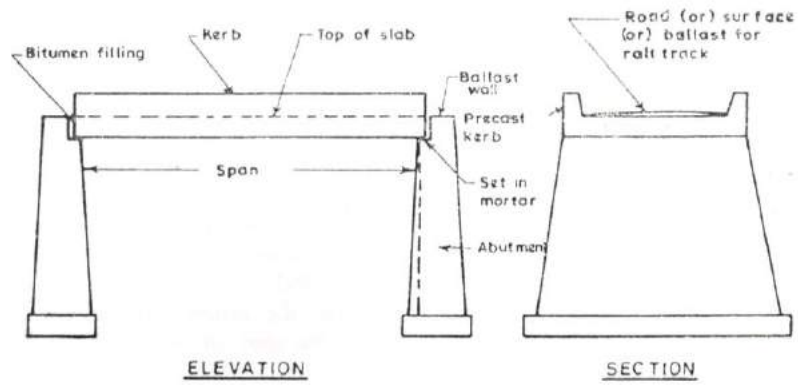


Fig.1. slab Bridge

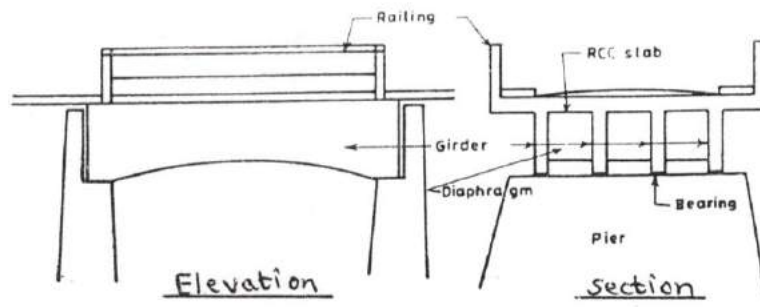


Fig2. Beam and slab Bridge

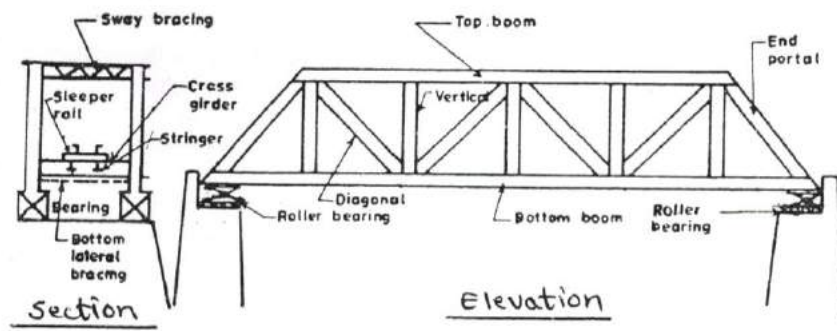


Fig.3. Truss Bridge.

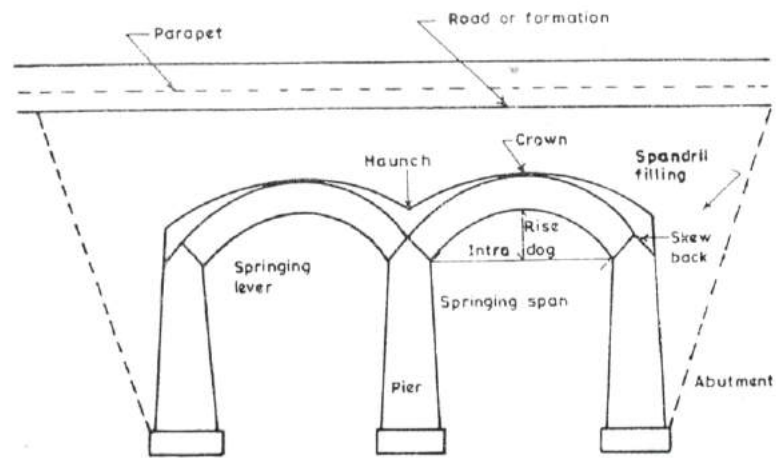


Fig.4. Arch Bridge.

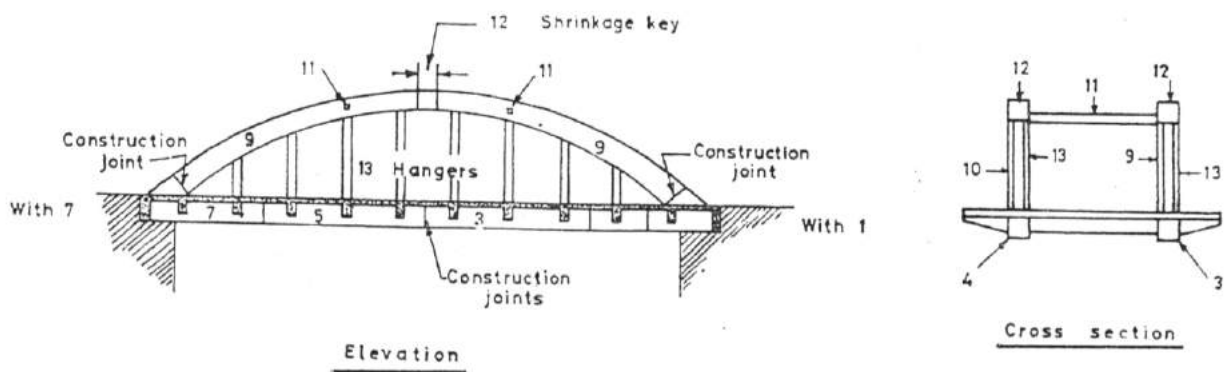


Fig.5. Bow-String Girder Bridge

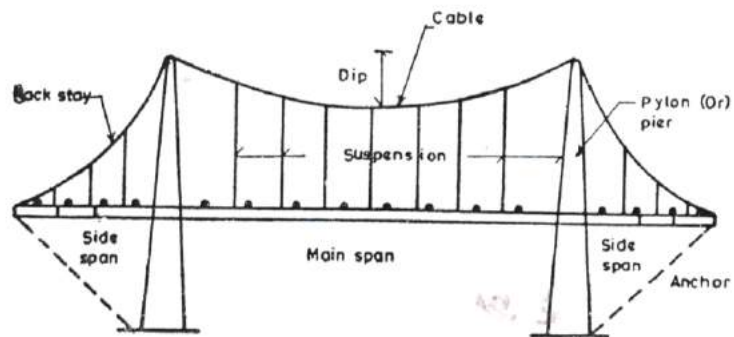


Fig.6. Suspension Bridge.

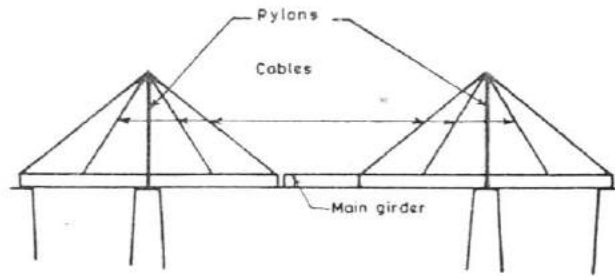


Fig.7. Cable-stayed Bridge.

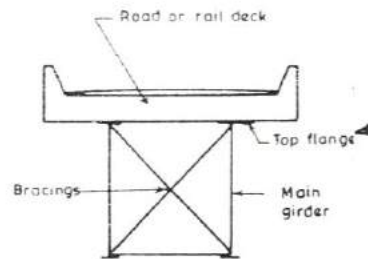
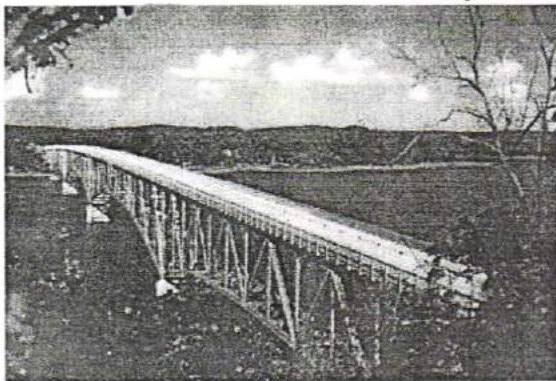


Fig.8. Deck Bridge

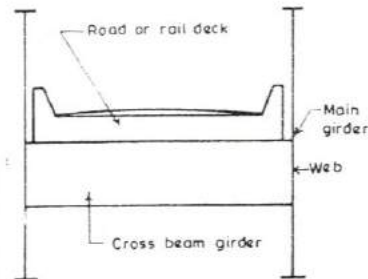
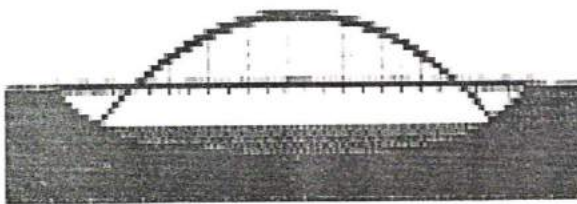


Fig.9. Half-through or Semi-through Bridge.

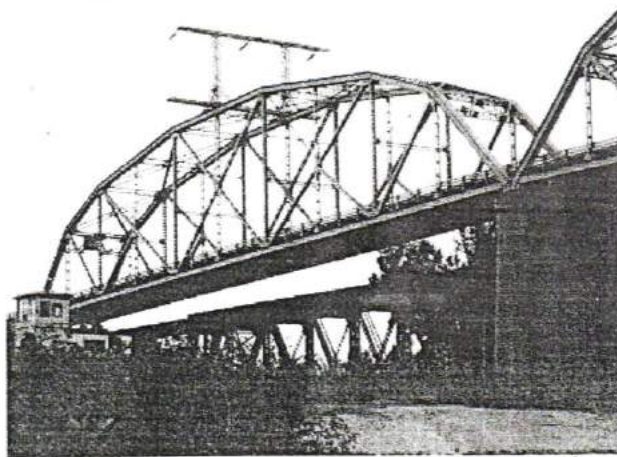
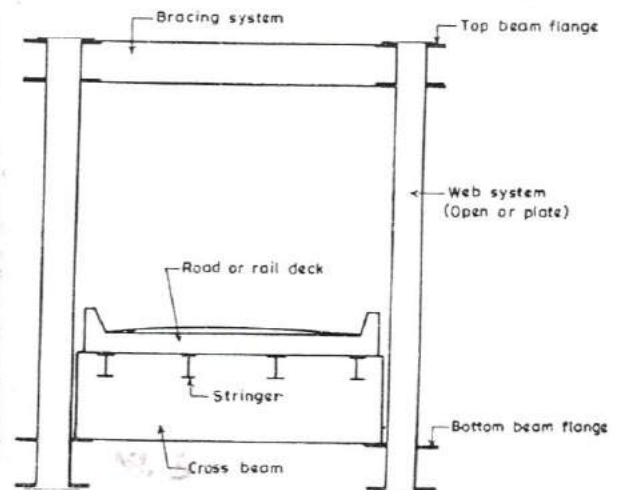


Fig.10. Through Bridge.




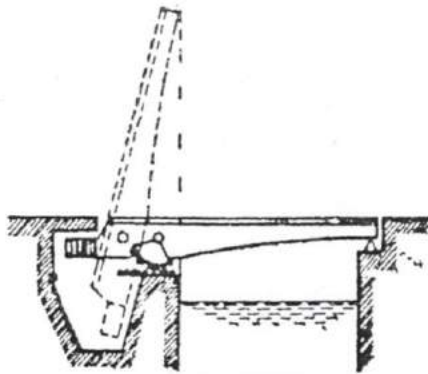


Fig. 11. Bascule Bridge.



Elevation



Plan

Fig. 12. Swing Bridge.


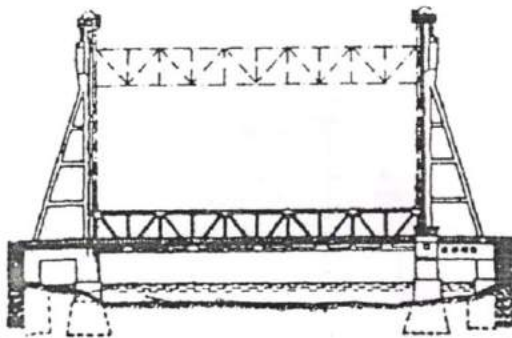


Fig. 13. Lift Bridge.

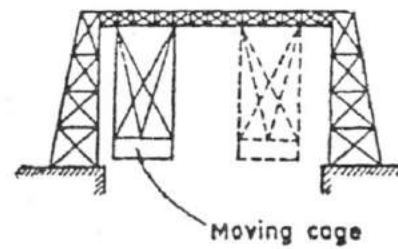

Moving cage

Fig. 14. Transporters Bridge.

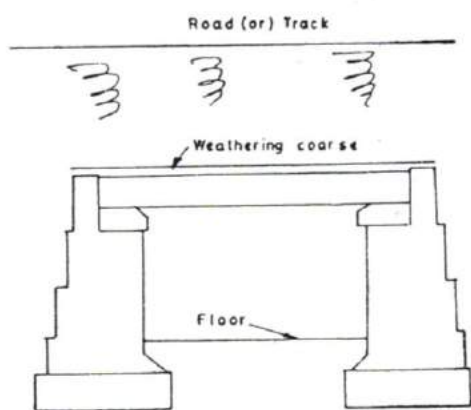


Fig. 15. RCC slab culvert.

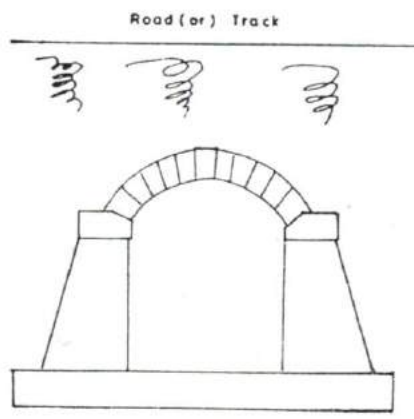


Fig. 16. Arch culvert.

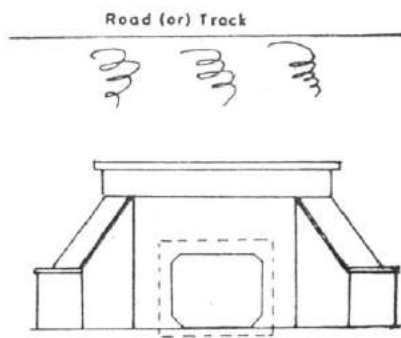


Fig. 17. Box Culvert.

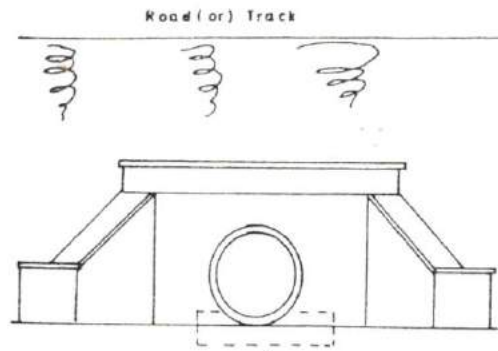


Fig. 18. Pipe Culvert.

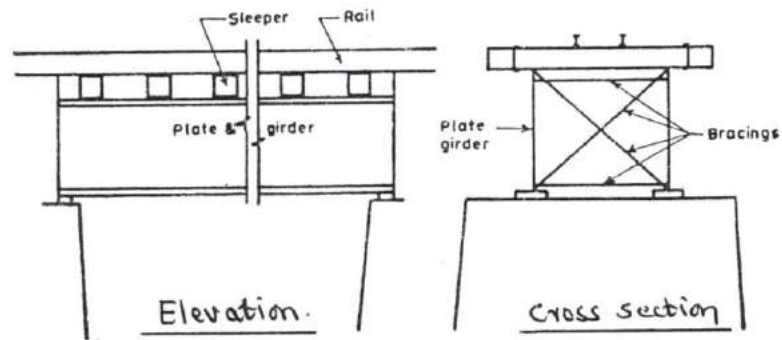


Fig. 19. Steel Girder Culvert (for Railways).

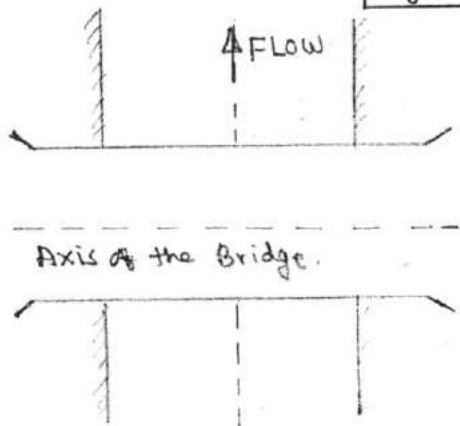


Fig. 20. Square Bridge.

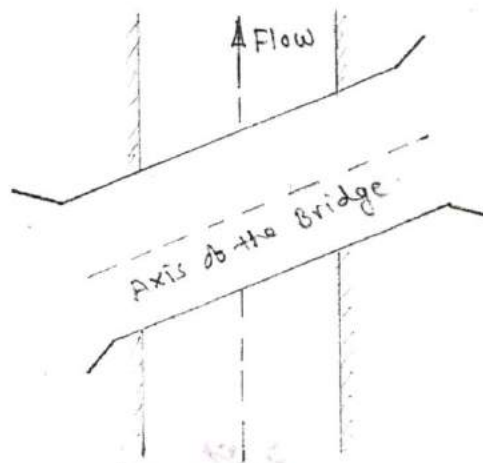


Fig. 21. Skew Bridge.

~~*~*

Chapter – 4 DAMS

Introduction

A dam is an abstraction or a barrier built across a stream or a river. The side of the dam on which water gets collected is called the upstream side and the other side of the dam is called the downstream side. The water body formed on the upstream side of the dam is called reservoir.

Various purposes of constructing a dam are:

- to provide water for irrigation
- to provide water supply facility to township
- to generate hydroelectric power
- to control floods
- to create recreational facilities
- to promote fisheries
- to provide navigation facilities
- to store wastes from mines (i.e., Tailing dams)

Classification of Dams

Classification I: Based on materials used for the construction:

- Timber dam
- Steel dam
- Masonry / Concrete dam
- Earth dam
- Rockfill dam
- Combined earth and rockfill dam

Classification II: Based on relative deformable capability:

- Rigid dam
 - Timber dam
 - Steel dam

- Concrete / Masonry dam
- Non-rigid dam (Embankment dam)
 - Earth dam
 - Rockfill dam
 - Combined earth and rockfill dam

Classification III: Based on hydraulic design of dam:

- Overflow dam: It is a dam which is designed such that the surplus water in the reservoir passes over its crest to the downstream side. These are also called spill ways. Ex: Bhakra dam, Kabini dam.
- Non-overflow dam: It is a dam where water will not flow over the top of the dam. However, provision may be there to allow water from upstream side to downstream side through sluices. Ex: KRS dam, Karnataka

Note: Most of the existing dams are combinations of overflow and non-overflow dams.

Classification IV: Based on structural behaviour

- Gravity dam: This type of dam is design to resist the external forces such as water pressure, uplift pressure etc., by the weight of the dam. Ex: Bhakra dam.
- Arch dam: This type of dam is designed to transfer the water pressure acting on the dam to its abutments by the arch action. Ex: Idikki dam, Kerala
- Embankment dam: This type of dam resists the water pressure mainly by the shear resistance in addition to its weight of the dam materials. Ex: earth dams, rock filled dams.

Classification V: Based on function

- Storage dam: This dam is constructed to impound / store water during the periods of surplus flow (i.e. floods), which can be used during lean flow period.
- Diversion dam: This dam is constructed to raise the water level in the stream so that the flow from a natural stream is diverted in to canals or other conveyance systems to the place of use such as irrigation, power generation, navigation etc. This type of dam is also called Weir or Barrage.
- Detention dam: This dam is constructed to retard the flood flow and hence, to minimize the sudden effects of floods. This can be of two types.

- Water is temporarily stored and released gradually through an outlet structure
- Water is stored for a longer period with the sole intention of recharging the ground water.
- Debris dam: Main purpose of this dam is to trap the sediments in them. The tailing dam is a type of debris dam which is used to store the wastes released from mining industry. Ex: Lakhya dam, Kuduremukh.
- Cofferdam: It is a temporary structure constructed to divert the water from the work site.

Note: The figures of some of the dam types are shown below:

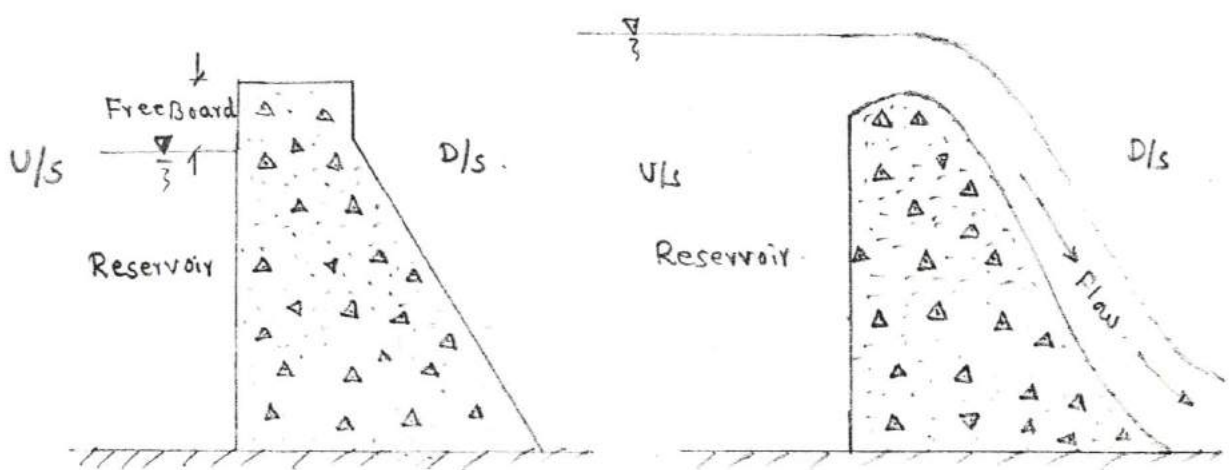


Fig. 1. Concrete dam/
Gravity dam/
Non-overflow dam.

Fig. 2. Concrete dam/
Gravity dam/
Overflow dam.

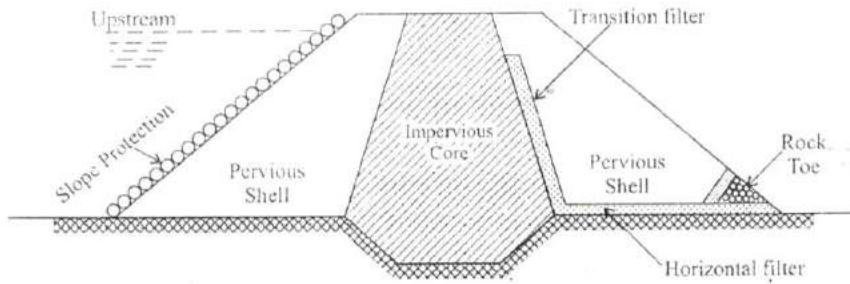


Fig.3. Earth dam / Non-overflow dam / Embankment dam

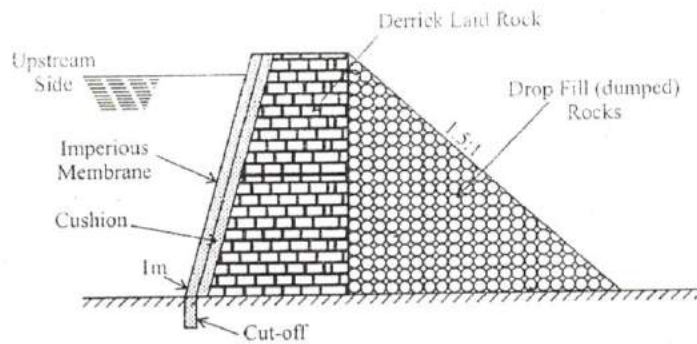


Fig.4. Rockfill dam / Non-overflow dam / Embankment dam

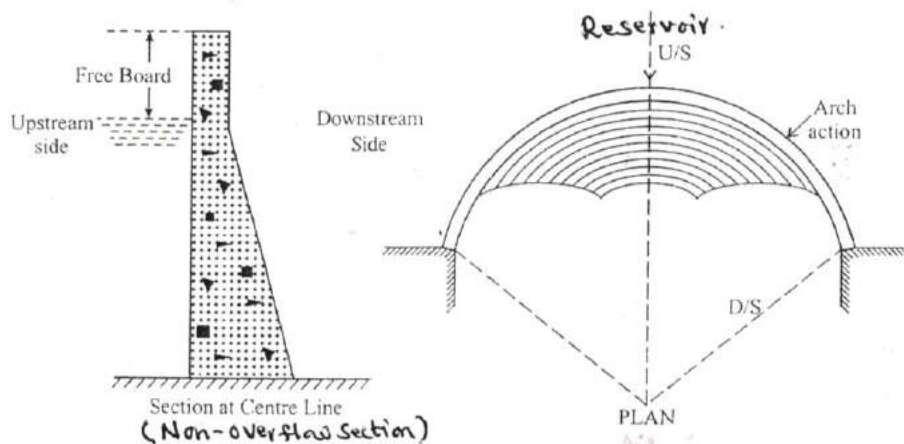


Fig.5. Arch dam

~~*~*