

General

Product Type:	Downlight
Mounting Type:	Mounted
Driver Required:	Yes (Integrated)
Application:	Outdoor

Lighting

Light Source:	CREE/SMD
Wattage:	30W
Lumen	2100lm
Efficacy (lm/w):	70m/w
Beam Angle	8°/12°/20°/40°/10°*22°/20°*60°
Colour Temp (K):	2200-6500K
CRI (Ra):	90
UGR:	-
Macadam Ellipse:	<2 SDCM
Lifetime (hrs):	50000 hrs

Electrical


Input:	AC220-240V, 50/60Hz
Driver Type:	Inbuilt
Dimmable:	On/off <i>Standard</i>
Dimming Method:	DALI/0-10V/TRIAC

Physical

Housing:	Die-cast Aluminum
Diffuser:	Black
Finish:	Black/White (RAL can be customized)
Dimension:	Dia130x178mm
Cut out:	-
IP Rating:	IP65
IK Rating:	IK05
Adjustability:	No
Gross Weight:	-

Additonal Information

Warranty:	5 Years
-----------	---------

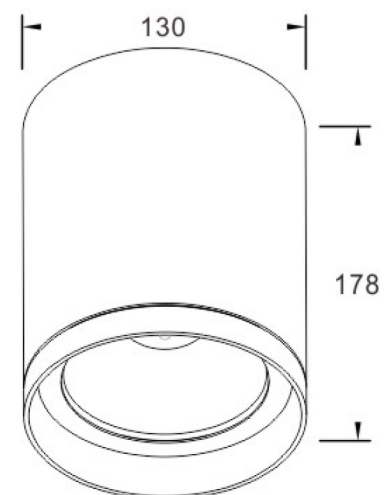

Physical Dimension(MM)

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K.
For product inquiries, please contact us at info@microlightsgroup.ae

©2025 Microlights Lighting LLC. All rights reserved.