Twin-Spray 1180cc Fuel Injector
(66U-1180)




The DeatschWerks Twin-Spray 1180cc fuel injector delivers the ultimate combination of performance, efficiency, and precision. Designed for dual-intake-valve engines, its twin-spray technology provides optimized fuel targeting while delivering an impressive 1180cc/min flow rate and exceptional consistency. The result is better atomization, sharper rev response, reduced wall wetting, and more efficient combustion, giving high-performance engines the precise fuel delivery needed to maximize power and efficiency.

- Twin Spray Technology
- 34mm o-ring to o-ring distance
- USCAR Connector
- Universal Fitment
- Comprehensive and complete injector data


Specifications

Alpha α:	20°
Beta β:	5°
Delta δ:	90° & 270°
Gamma γ:	0°
Max Delta Pressure:	90 psi.
Number of Pintle Holes:	12
Connector:	USCAR
Flow Rate @ 43.5 psi.	1243 cc/min
Flow Rate @ 58.0 psi.	1426 cc/min
Fitment:	* 34mm * 48mm & 60mm w/ adapters

Dimensions

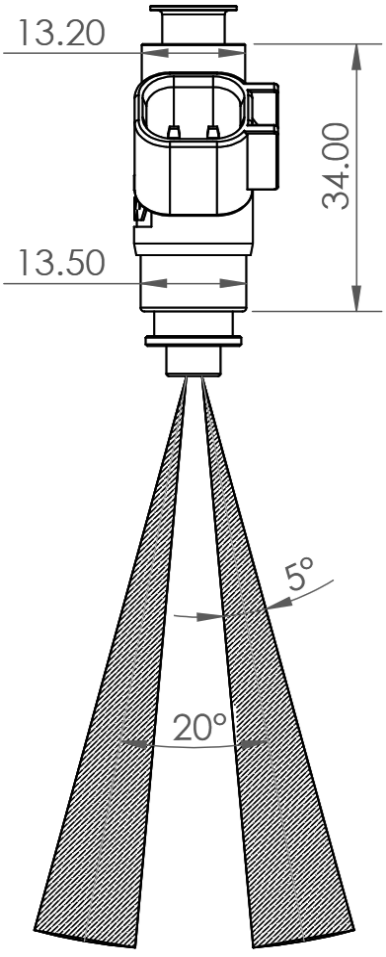

Dimensions (continued)

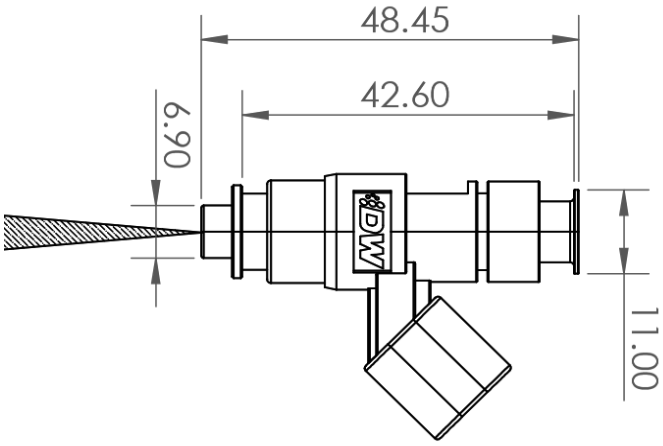

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION

DeatschWerks, LLC 405-217-0701 techsupport@deatschwerks.com REV 9-30-26