

General

Product Type:	Step Light
Mounting Type:	Recessed
Driver Required:	Yes (Integrated)
Application:	Outdoor

Lighting

Light Source:	LED
Wattage:	5W
Lumen	165lm
Efficacy (lm/w):	33lm/w
Beam Angle	60°
Colour Temp (K):	3000K/4000K/5000K
CRI (Ra):	80
UGR:	-
Macadam Ellipse:	<6 SDCM
Lifetime (hrs):	50000 hrs

Electrical


Input:	AC220-240V, 50/60Hz
Driver Type:	Inbuilt
Dimmable:	On/off
Dimming Method:	Non-dimmable

Physical

Housing:	Aluminum
Diffuser:	Clear glass
Finish:	Black
Dimension:	L136XW136XH78mm
Cut out:	L130xW130XH78mm
IP Rating:	IP65
IK Rating:	IK08
Adjustability:	No
Gross Weight:	-

Additonal Information

Warranty:	3 Years
-----------	---------

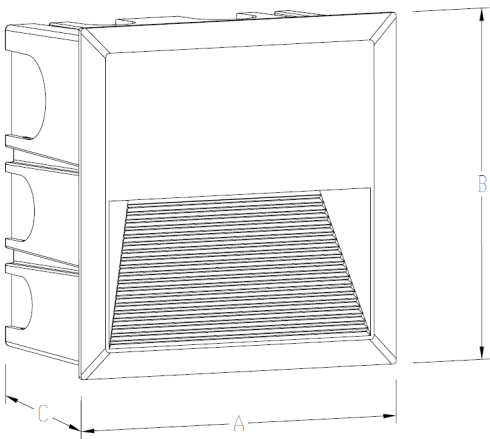

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K. For product inquiries, please contact us at info@microlightsgroup.ae

©2025 Microlights Lighting LLC. All rights reserved.