

Rhonde



General

Product Type:	Wall Light
Mounting Type:	Mounted
Driver Required:	Yes (Integrated)
Application:	Outdoor

Lighting



Light Source:	GU10
Wattage:	7W
Lumen	490lm
Efficacy (lm/w):	70lm/w
Beam Angle	24°/36°
Colour Temp (K):	3000K/4000K/6000K
CRI (Ra):	80
UGR:	-
Macadam Ellipse:	<2 SDCM
Lifetime (hrs):	50000 hrs

Electrical

Input:	AC220-240V, 50/60Hz
Driver Type:	Inbuilt
Dimmable:	On/off <i>Standard</i>
Dimming Method:	DALI/0-10v TRIAC

Physical

Housing:	Die-cast Aluminum
Diffuser:	Glass
Finish:	Black/Grey
Dimension:	Dia65xH140mm
Cut out:	-
IP Rating:	IP65
IK Rating:	IK06
Adjustability:	No
Gross Weight:	-

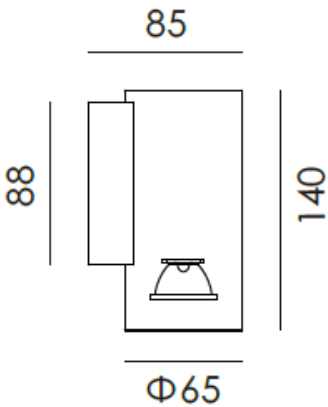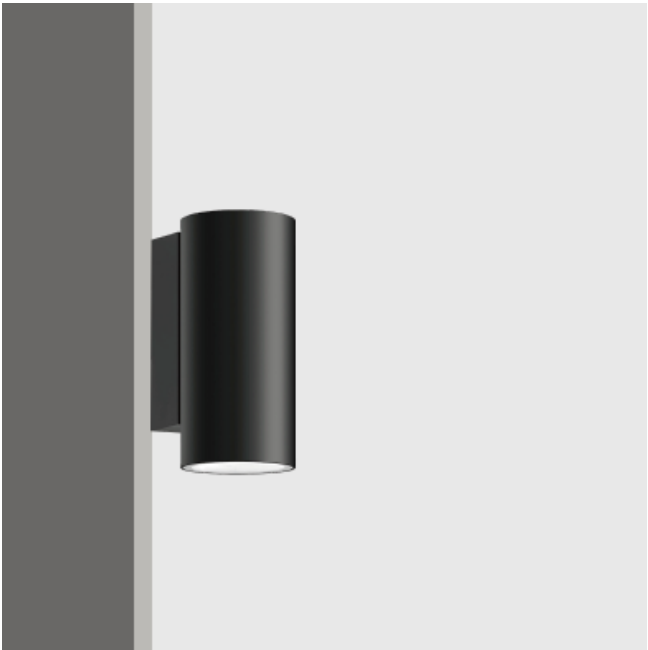

Additonal Information

Warranty:	5 Years
-----------	---------

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K.
For product inquiries, please contact us at info@microlightsgroup.ae

©2024 Microlights Lighting LLC. All rights reserved.