


EURONICS

Airis

Hand Dryer

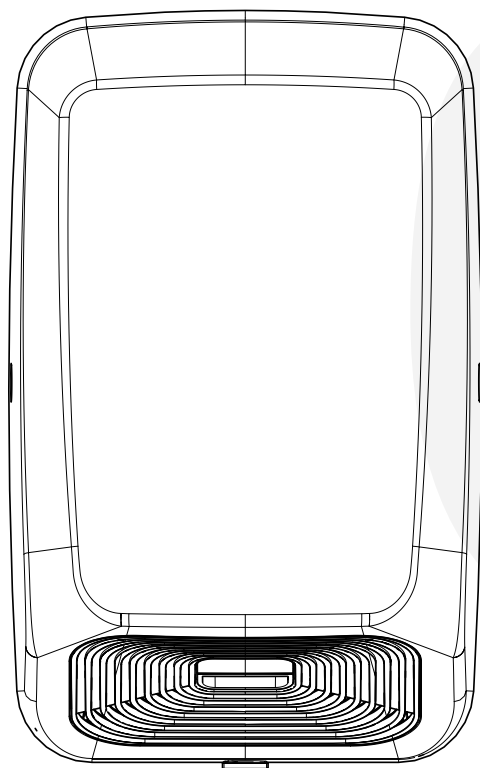

USER MANUAL INSTRUCTION

PRODUCT FEATURES

Equipped with an **automatic infrared sensor** for touch-free operation, ensuring ease of use, reducing waste, and effectively preventing cross-contamination and the spread of pathogens.

Features **advanced chip control technology** combined with a highly responsive infrared sensor for reliable performance.

Powered by a **high-speed motor** capable of drying hands in few seconds.

Easy to install using **expansion pipes and screw hooks**—simply mount the unit and it's ready for use. Remember to disconnect the power during maintenance.

Suitable for a wide range of environments, including **hospitals, schools, food and pharmaceutical facilities, airports, office buildings, hotels, government institutions, and research centers.**

Integrated with **over-current protection** for enhanced safety and accident prevention.

TECHNICAL PARAMETERS

Rated Voltage	AC220-240V	Waterproof grade	IPX3
Rated frequency	50/60 Hz	Wind Speed	100 m/s
Rated power	1250w	Noise level	72db
Temperature	50 C	Drying Time	Less than 30 secs
Installation	Wall Mounting	Overall Size	200x280x152mm

MAINTENANCE

- Always disconnect the power before cleaning the hand dryer.
- To clean the outer shell, use a soft cloth and a mild, natural detergent. Do not use acidic or alkaline bathroom cleaners, benzene, lacquer thinner, abrasives, or other harsh chemicals, as these may damage the surface.
- Avoid using nylon brushes or any abrasive tools to prevent scratches on the surface.
- During cleaning, ensure that no water droplets enter the machine to prevent the risk of electric shock or short circuit.
- It is recommended to turn off the power when the device is not in use for extended periods to help prolong its service life.
- If the power cord is damaged, it must be replaced with a specialized cord purchased from the manufacturer or an authorized service provider.
- In case of malfunction, immediately disconnect the power and stop using the device. Contact a qualified professional for repair.
- If the hand dryer will not be used for a long period, turn off the power, clean the unit, and store it indoors in a clean, dry, and sealed environment.

MAINTENANCE

- This product is covered by a one-year warranty, effective from the date of purchase.
- During the warranty period, if any malfunction occurs due to a defect in the product itself, the customer is entitled to free repair or replacement. To claim warranty service, customers must present the original purchase invoice along with a properly filled and dealer-stamped warranty card at the place of purchase.

The following cases are not covered under free warranty service:

- Damage or malfunction resulting from improper use, unauthorized disassembly, modification, or repair by individuals not authorized by our company.
- Damage caused by natural disasters such as fire, earthquake, lightning, or power surges.
- Malfunctions resulting from the use of an incompatible or incorrect power supply.
- Faults caused by prolonged operation in poor or unsuitable working conditions.
- Missing, incomplete, or improperly filled warranty cards.
- Claims made after the warranty period has expired.
- Even if your product is outside the warranty scope, our company is still committed to providing reliable support and service.




REPLACE FILTER

Attention:

To maintain optimal performance, please replace the filter every 3 to 6 months.

How to Replace the Filter:

1. Unscrew the filter cover to slide the filter compartment.
2. Remove the old filter and insert a new one.
3. Close the filter cover securely and screw it.

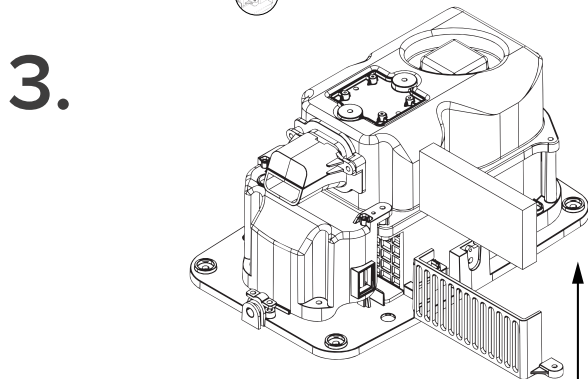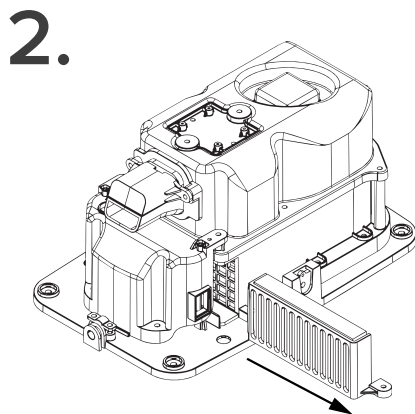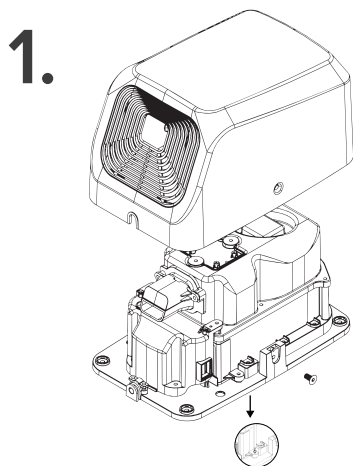

WARNINGS

Do not install the unit in areas where it may be exposed to water, water vapor, or high humidity (such as bathrooms with heavy moisture), as this can pose a risk of **electric shock**.

All electrical connections must be carried out by a licensed electrician to avoid the risk of electric shock or fire.

Always **disconnect the power supply** before performing any installation, maintenance, or cleaning to ensure safety.

It is strongly recommended to install a leakage circuit breaker and other fire protection devices for added safety.

Do not attempt to disassemble, modify, or repair the machine without proper authorization, as this can result in **electric shock, fire, or other serious accidents**.

ATTENTION DURING INSTALLATION

Ensure there are no **obstructions within 400 mm** of the air outlet to allow proper airflow.

Do not install the hand dryer above **reflective surfaces** such as stainless steel or artificial marble, as these can cause **sensor malfunctions**.


The unit must be **securely mounted** on a smooth, stable wall to prevent damage or injury from falling.

Avoid installing the product in environments with **corrosive or flammable gases** or materials, as this may lead to **fire hazards or product malfunction**.


Do not install in areas with **excessive dust** or **high temperatures**, as this may **damage the unit** and affect its performance.

METHOD OF INSTALLATION

1.

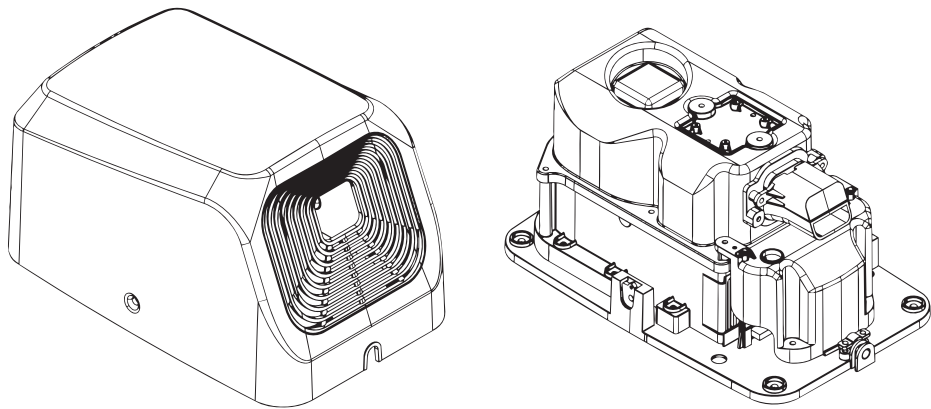


2.

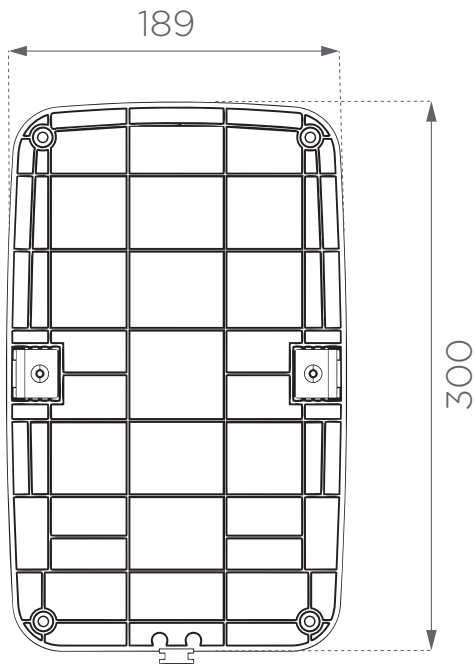


METHOD OF INSTALLATION

3.

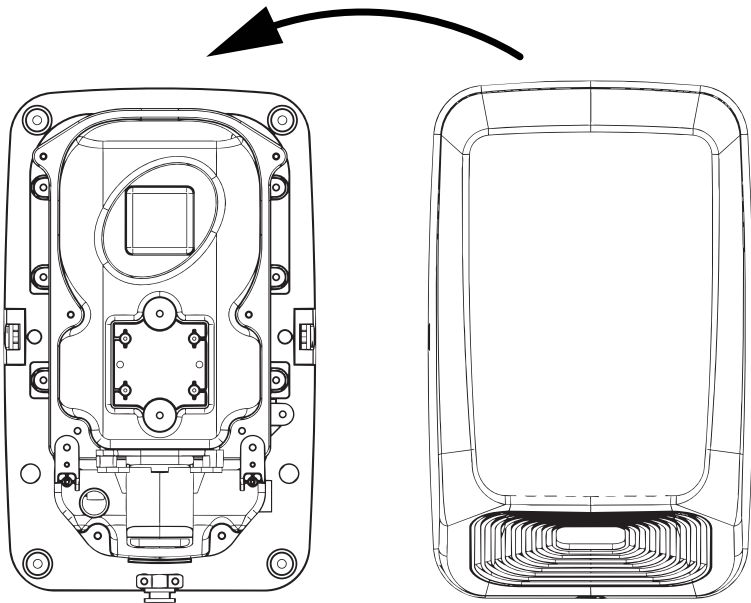

COMPONENTS NAME

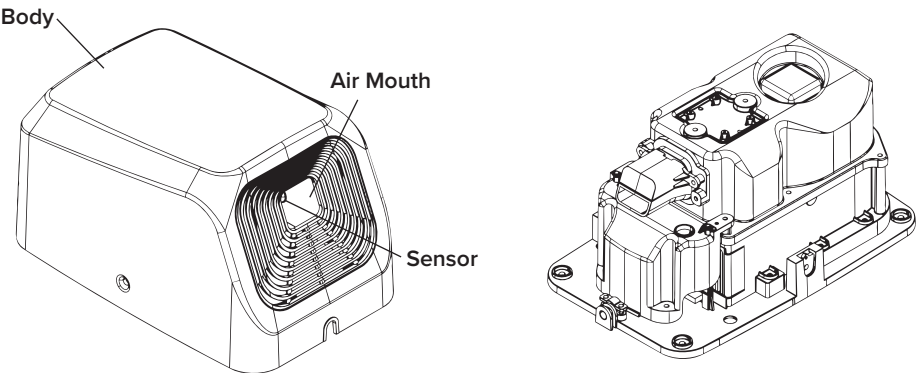

EURONICS

EURONICS INDUSTRIES PVT. LTD.
8010 930 930 | in@euronics.co.in | www.euronics.co.in

Offices : Gurugram | Bangalore | Mumbai | Pune | Hyderabad | Ahmedabad | Surat | Chennai | Kolkata | Kerala | Indore | Chandigarh
Visakhapatnam | Lucknow | Nagpur | Goa | Hubli | Coimbatore | Trivandrum | Guwahati | Jaipur | Kochi | Rajkot | Bhopal | Patna | Kanpur
Vadodara | Bhubaneswar | Noida | Jammu | Dehradun | Ranchi | Udaipur | Chhattisgarh