

General

Product Type:	Spike Light
Mounting Type:	Mount
Driver Required:	Yes (Integrated)
Application:	Outdoor

Lighting

Light Source:	LED
Wattage:	6W
Lumen	480lm
Efficacy (lm/w):	80lm/w
Beam Angle	15°/24°/36°
Colour Temp (K):	2700K/3000K/5000K/6500K
CRI (Ra):	80/90
UGR:	-
Macadam Ellipse:	<2 SDCM
Lifetime (hrs):	50000 hrs

Electrical


Input:	AC220-240V, 50/60Hz
Driver Type:	Inbuilt
Dimmable:	On/off
Dimming Method:	Non-dimmable

Physical

Housing:	Die-cast Aluminum
Diffuser:	Tempered glass
Finish:	Black/Grey/White
Dimension:	Ø55X69mm
Cut out:	-
IP Rating:	IP66
IK Rating:	IK06
Adjustability:	Mounting plate 355°
Gross Weight:	-

Additonal Information

Warranty:	5 Years
-----------	---------

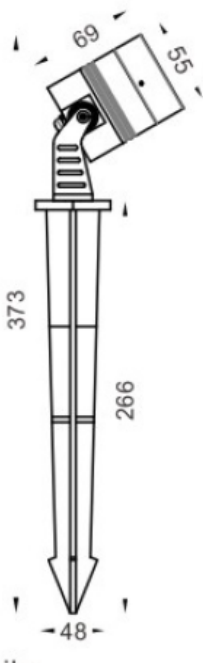

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K. For product inquiries, please contact us at info@microlightsgroup.ae

©2024 Microlights Lighting LLC. All rights reserved.