



## LED Mini Wall Pack- MNWP Series



**Application:** Ideal for indoor and outdoor areas such as decks, entryways, porches, patios, corridors, walkways, and other common spaces.


### Certification



### Specifications


|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Model                 | HYA-MWP-962-3W3CCT                                                 |
| Wattage               | 15W/20W/25W (Selectable)                                           |
| Input Voltage         | 100-277 V AC, 50/60Hz                                              |
| Dimming               | 0-10V                                                              |
| Lumen Output          | 1800/2400/3200 lm (Selectable)                                     |
| CCT                   | 3000K/4000K/5000K<br>or 3500K/5000K/6500K (Selectable)             |
| CRI                   | Ra>80                                                              |
| Lens                  | Clear Stripped<br>(IK08 Vandal Resistant Rating &<br>UV Resistant) |
| Housing Finish        | Bronze                                                             |
| Operating Temperature | -4°F ~ +113°F (-20°C ~ +40°C)                                      |
| Location Rating       | Wet Location Rated (IP66)                                          |
| Life Span             | Lumen Maintenance over 70% @<br>50,000+ Hours                      |
| Accessories & Options | Photocell Control(PC) pre-Installed                                |
| DLC ID                | DLC Premium (S-K4BGAD)                                             |
| PCS/BOX               | 10                                                                 |
| Master Box Dimensions | 15.35" x 13.18" x 9.65"<br>(390 x 335 x 245 mm)                    |
| Master Box Weight     | 15.65 lb (7.1 kg)                                                  |

### Dimension

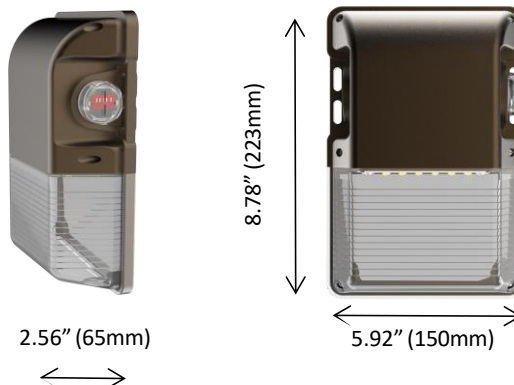


### Features

The transparent cover on the side can be screwed off easily.



Cap



CCT & Watt Selective and Sensor  
On & Off Modular

### Wattage Select



25W



20W




15W

### Photocell




Sensor ON




Sensor OFF

### CCT Select



5000K



4000K



3000K