

Australian Made Cabinetry

Vanity Cabinets, Mirror Cabinets,
Wall Cabinets & Tallboys



CHECK GOODS THOROUGHLY BEFORE INSTALLATION

Installation of received goods that are damaged, warped or faulty will void warranty. Ensure all items meet your plumbing requirements.

Some movement may occur during transportation and installation that may cause doors and drawers to become unaligned. It is the responsibility of the installer to make any necessary adjustments after installation.



PLEASE LEAVE THIS GUIDE WITH THE OWNER

Before Installation

PLEASE READ THIS INSTALLATION GUIDE CAREFULLY BEFORE INSTALLING THE PRODUCT.


Before installing, check that your wall is flat and plumb. If not, the cabinet will need to be packed out so that it sits level, otherwise the cabinet may twist, causing the doors and drawers to fall out of alignment and not function properly.

The cabinet should be installed over the top of a tiled wall with adequate clearance for doors and drawers to open. When installing the side of a cabinet against a wall, a fill panel can be used. See 'Installation Against a Wall' for more information. It is recommended that vanities are installed at least 300 mm away from wet areas such as showers and baths.


Mounting the Cabinet

Mount the cabinet using screws through the solid back panel of the cabinet. Screws should be selected to suit the stud material and have a pan or counter sunk head. Screws should be placed horizontally within 100 mm from the top of the cabinet, with a maximum of 300 mm of spacing horizontally. The screws near the left and right edge of the cabinet should be placed within 100 mm of each side.


When mounting vanity cabinets, use a spirit level to ensure that the cabinet is level and plumb on all sides. If not, remove the cabinet and adjust the wall or pack the back of the cabinet to correct the alignment. **DO NOT install the vanity top until the cabinet is level and plumb in all directions.**

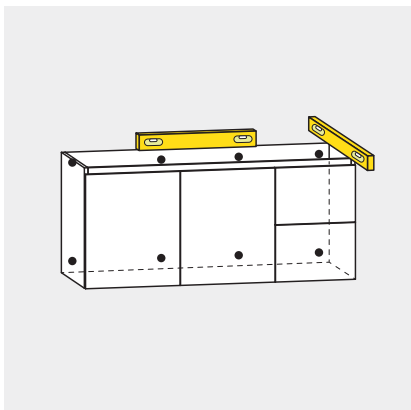

Vanities: Ensure cabinet is level and plumb. Mount to wall at the points detailed above.

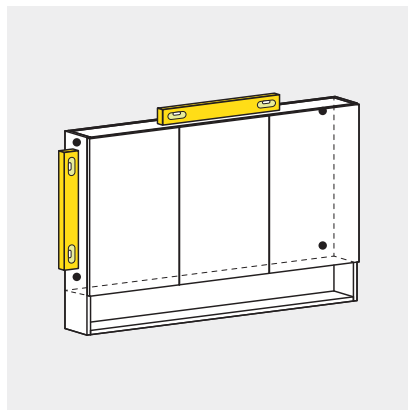

Mirror Cabinets & Wall Cabinets: Ensure cabinet is level and plumb. Mount to wall studs with included screws in each corner.

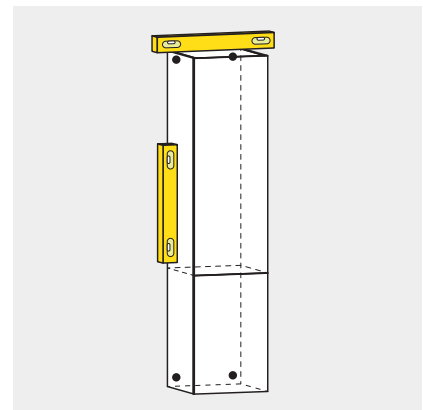

Tallboys: Ensure cabinet is level and plumb. Mount with suitable screws in each corner.

All installations must be carried out by a licensed tradesperson in accordance with all applicable Building, Plumbing and Electrical codes, and Federal, State, or Local Government Regulations in accordance with AS/NZS 3500 Plumbing & Drainage, AS/NZS 6400:2016 Water Efficient Products, and AS/NZS 3000:2007 Electrical standards for any installations to which these standards apply.

Adjusting the Doors

Height Adjustment

Rotate the screw shown to raise or lower the door.



Side Adjustment

Rotate the screw on the hinge arm to move the door from left to right (when closed).



Depth Adjustment

Rotate the cam adjuster on the hinge arm to increase or decrease depth (when closed).




Damping Adjustment

The damping action can be adjusted to fit different door weights and sizes which enables perfect door functioning. Turn clockwise to increase damping. Turn anti-clockwise to decrease damping.



Door Removal



Push tab located at the back of the hinge arm.

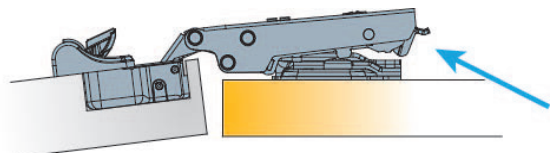



Adjusting the Drawers

Height Adjustment



A) Height adjustment is done via the cam.
Release the locking screw shown.

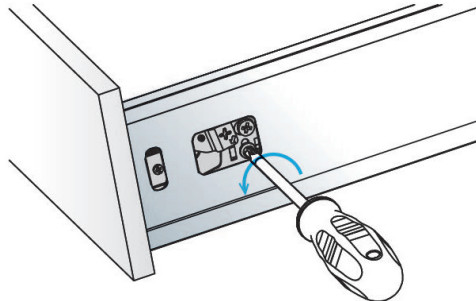A

B) Rotate the screw to adjust the height

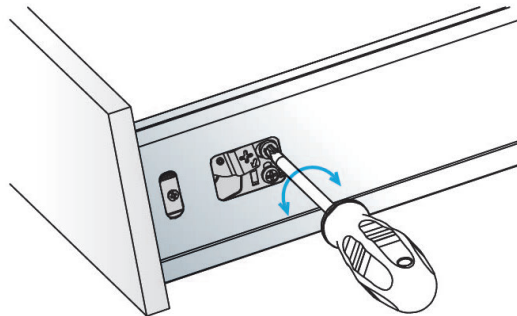
B

C) After the desired height is achieved, tighten the screw to lock it in place.

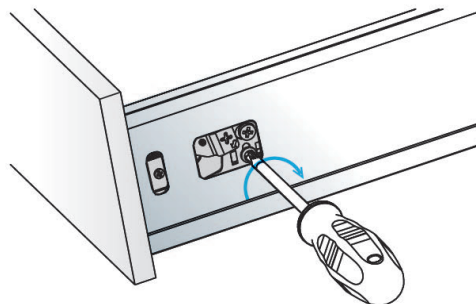C

Side Adjustment


Tighten or loosen the screw on the side of the drawer indicated below.

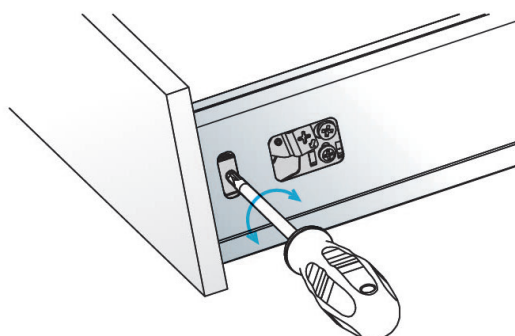

Drawer Removal & Attachment


Drawer Removal

Press the button up on both sides simultaneously and keep pressed to slide the drawer out.

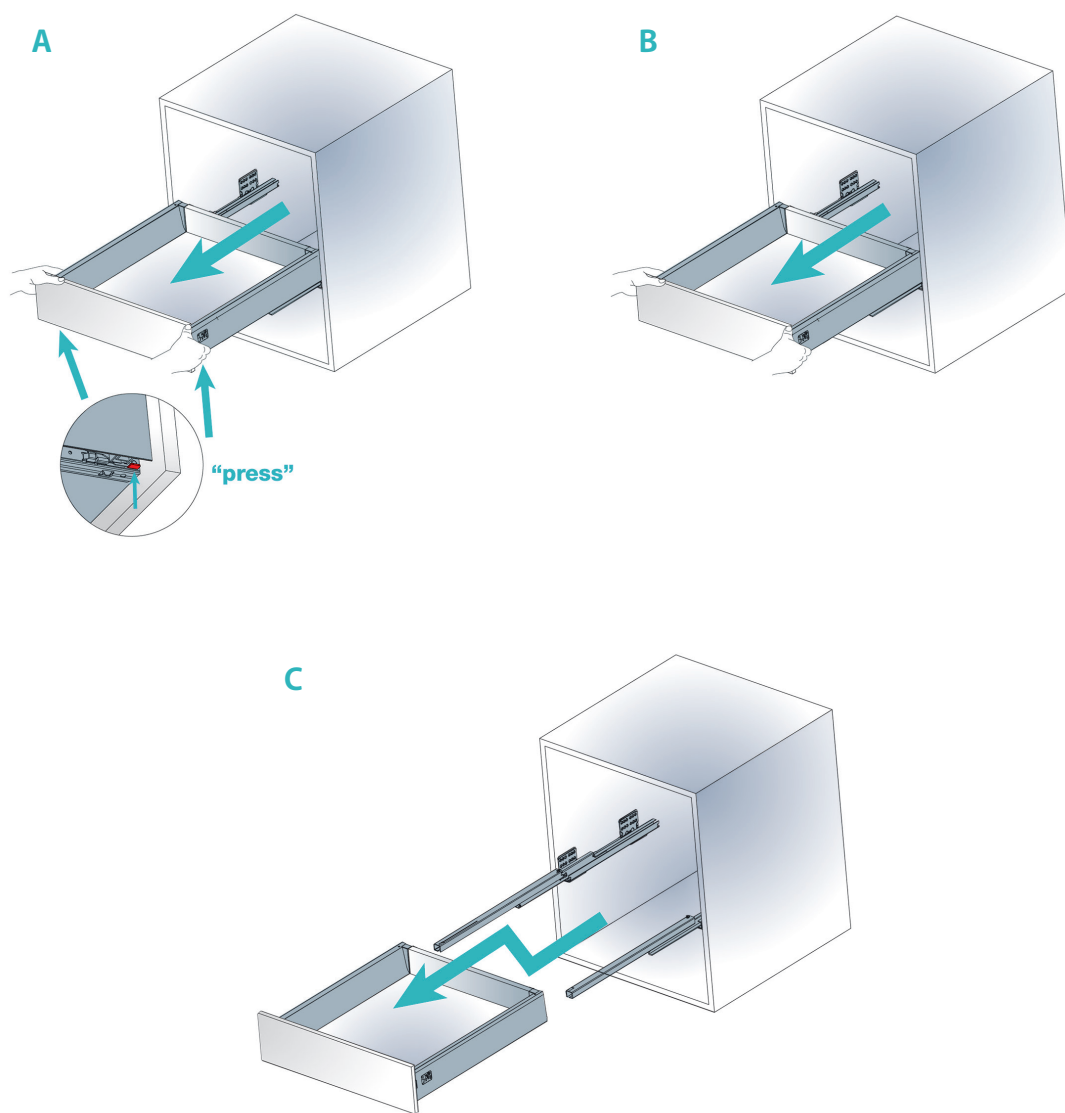

Drawer Attachment

Place the drawer horizontally on the runners and push towards the cabinet until you hear both sides click.

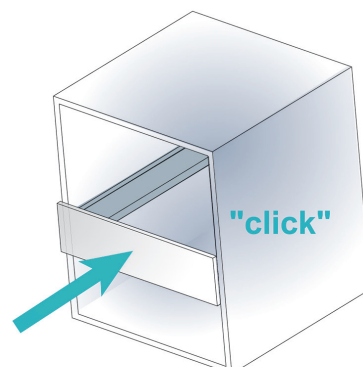

Fitting the Top & Sealing the Cabinet

For vanities, fit the top to the cabinet by sealing all four edges with a non-acidic silicone. **DO NOT** silicone timber tops to cabinets – refer to the instructions enclosed with the product.



Seal all cabinet edges against the floor and wall to prevent water penetration.




When fitting the basin waste, tighten by hand only, and then use silicone to seal. Overtightening of the waste may cause undue stress and damage the basin or basin-top.



Installation Against a Wall (Vanity Cabinets)

When installing the cabinet against a wall, a fill panel can be used to fill the gap between the wall and the side of the cabinet. For short cabinets, the panel must be cut to size to suit the height of the cabinet from floor to the bottom edge of the vanity top.

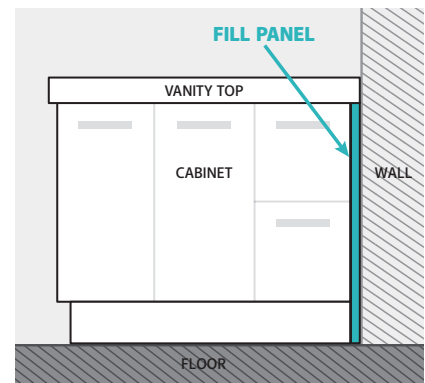

Cleaning & Care

The best method of maintaining the finish is simply to wipe over with a clean, soft cloth. It is important that no abrasive cleaners or wax-based creams are used as this can result in a build-up of deposits/scratches that will detract from the appearance.

- **Scratches** - Avoid contact with hard, sharp objects. Should scratches occur on gloss lacquered cabinets, fine marks can be removed using a cutting compound normally used for car re-treatment, followed by buffing with a car polish and a clean, soft cloth.
- **Chemical Damage** - Spills of some products such as hair lacquer, after-shave lotion, nail polish and remover, mineral turpentine, white spirit, kerosene, aerosol propellants and insecticides should be removed immediately by cleaning the product with a soft cloth.
- **Burns** - Avoid placing hot objects, such as hair straighteners, curling tongs or lit cigarettes on any surface as these will cause discolouration and marking. Should slight accidental damage occur, it may be possible to remove marks with the same approach as for scratches (refer to 'Scratches' above).
- **Discolouration** - Hair dye, bleaches, boot polish and similar chemicals will discolour the surface if not removed immediately. Provided the discolouration is not severe, restore the surface as described for scratches.

Warranties

Residential Warranty Periods

Applies to domestic uses and applications of Fienza® products, such as private dwellings and retirement villages.

CABINETRY*	
*Does not include door and drawer adjustment, or cabinets damaged by water leaks or burst hoses.	
Range / Component	Residential
Australian Made Cabinets (MDF only)	10 years replacement parts or product, 1 year labour
Australian Made Cabinets Drawer Runners	LIFETIME replacement parts or product, 1 year labour
Handles, Hinges, Legs & Other Drawer Runners	5 years replacement parts
Glass Doors & Mirror Doors	1 year replacement parts

Commercial Warranty Periods

Applies to commercial uses and applications of Fienza® products, including, but not limited to: commercial food premises such as restaurants; commercial accommodation such as hotels; hospitals and healthcare facilities; public amenities; and industrial, laboratory and manufacturing facilities.

CABINETRY*	
*Does not include door and drawer adjustment, or cabinets damaged by water leaks or burst hoses.	
Range / Component	Commercial
Australian Made Cabinets (MDF only)	1 year replacement parts or product, 1 year labour
Australian Made Cabinets Drawer Runners	LIFETIME replacement parts or product, 1 year labour
Handles, Hinges, Legs & Other Drawer Runners	1 year replacement parts
Glass Doors & Mirror Doors	1 year replacement parts

Australian Consumer Law

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Fienza Pty Ltd reserves the right to make changes in product characteristics, packaging or availability at any time without notice. Please visit fienza.com.au for the latest information.

For warranty support, please contact Fienza

15 Walter Cres, Lawnton QLD 4501

PO Box 5381, Brendale QLD 4500

P 07 3490 6700 F 07 3490 6719

E help@fienza.com.au ABN 76 136 411 311

fienza®

Warranty Conditions

- Installation has been carried out by a licensed tradesperson in accordance with all applicable Building, Plumbing and Electrical codes, and Federal, State, or Local Government Regulations in accordance with AS/NZS 3500 Plumbing & Drainage, AS/NZS 6400 Water Efficient Products, and AS/NZS 3000 Electrical standards for any installations to which these standards apply.
- All maintenance and adjustments to the product after the installation have been carried out by a licensed tradesperson.
- All care and cleaning instructions have been adhered to as prescribed.
- Proof of purchase is required for warranty claims.

Warranty Limitations

To the extent permitted under the Trade Practices Act and other relevant legislation, Fienza's liability is limited to:

- The cost of replacing the goods, or
- The cost of obtaining equivalent goods, or
- The cost of having the goods repaired
- Fienza is not responsible for any lack of operation or performance of goods (or any loss or damage) where goods are used or adapted for a with other goods not supplied by Fienza.
- It is the responsibility of the customer and installer before installation to ensure are correct and free of obvious visible faults.
- Fienza is not responsible for the labour and rectification costs incurred in the above circumstance.

Conditions for On-Site Warranty Service Calls

Fienza will charge a service fee for each visit to an installation by its technician where it is determined that the fault is due to poorly executed or unlicensed installation work or where the product is not a genuine Fienza product or where the product is outside the warranty period. This may be paid in advance by credit card over the phone to a Fienza technician attending the site and will be refunded if the Fienza product is found to be at fault.

Cleaning & Care

- Regularly clean with mild soapy water using a clean, soft cloth.
- Do not use harsh detergents, bleach, abrasive cleaners or cream/wax cleaners. These substances can result in scratches and/or deposit build-ups that will affect the appearance.
- Avoid placing hot objects, such as hair straighteners, on any surface as these will cause discolouration and marking.
- Spills of hair dye, after-shave lotion, nail polish and remover, aerosol spray and other harsh chemicals should be removed immediately to prevent damage and discolouration. Clean immediately with mild soapy water using a clean, soft cloth.

All installations must be carried out by a licensed tradesperson in accordance with all applicable Building, Plumbing and Electrical codes, and Federal, State, or Local Government Regulations in accordance with AS/NZS 3500 Plumbing & Drainage, AS/NZS 6400:2016 Water Efficient Products, and AS/NZS 3000:2007 Electrical standards for any installations to which these standards apply.