



LED T8 8FT Tube - CCT and Watt Selectable




Certifications



Application: Perfect for indoor and outdoor locations such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

Installation

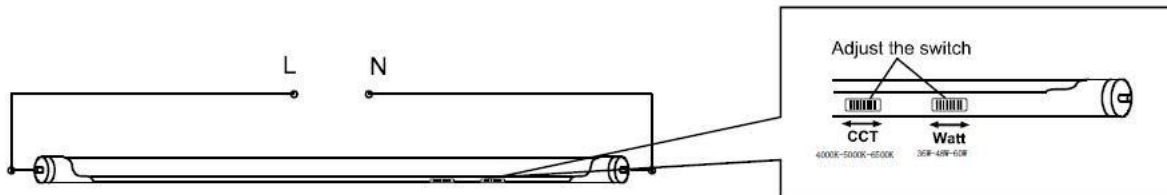

Specifications

Model	HYA-T8-8FT-TWCCT-B-RF	HYA-T8-8FT-TWCCT-B-FF	HYA-T8-8FT-TWCCT-B-FC	HYA-T8-8FT-TWCCT-B-RC
Lamp Base Options	R17D (HO)	FA8 Single Pin	FA8 Single Pin	R17D (HO)
Cover Options	Frosted Cover		Clear Cover	
Wattage	36W-48W-60W Selectable			
Input Voltage	AC100-277V 50/60Hz			
Max Current	0.513A@60W&120V; 0.232A@60W&277V			
Lumen Output	7200 lm @ 60 W			
CCT	4000K-5000K-6500K Selectable			
Beam Angle	180°			
CRI	Ra>80			
Working Temperature	-4°F ~+113°F (-20°C ~+40°C)			
Environment Location	Damp Location			
Life Span	Lumen Maintenance: >70% at 50,000+ Hours			
Housing	Aluminum & Polycarbonate (AL&PC)			
DLC ID	S-WPFH5P [Internal Driver/Line Voltage (UL Type B) Lamps]			
PCS/BOX	20			
Master Box Dimension	96"x7.8"x7" (242 mmx20 mmx18 mm)			
Master Box Weight	27.42 lbs (12.44 kg)			