

## Refrigeration - Counter Sorex - 750

### Counter Chiller - Solid Door

#### SRTA 2C 750



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Refrigerated counter with 750 mm depth, with 2 doors.

Operating temperature from +2 to +12 °C.

Made entirely of stainless steel AISI 430, internally and externally. High-density CFC/HCFC-free polyurethane insulation with a thickness of 70 mm. Hygienic interior with a dished floor pan. Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions. High-efficient refrigeration unit with refrigerant R404A.

#### OTHER AVAILABLE MODELS

- SRTA 3C 750
- SRTA 1C 750

#### MAIN FEATURES

- Refrigerated counter with 2 doors, compartments designed for GN 1/1 shelves and pans.
- Performs under tropical climate with an ambient temperature of +15 to +40 °C.
- Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions.
- Self-closing doors with heavy-duty hinges and non-tool removable balloon gaskets.
- Removable racking system with height-adjustable shelf runners in stainless steel and two PVC-coated wire shelves per compartment.
- Energy-efficient anti-condensation door/drawer mullion heaters.
- Lockable door with master keys offering security for the stored products.
- Ducted cold air distribution, ensuring uniform temperature ( $\pm 2^{\circ}\text{C}$ ) among all compartments.
- Slide out/in cassette refrigeration system with a corrosion-resistant coated evaporator and removable condenser filter to support convenient on-site maintenance and servicing.
- Height adjustable, tubular stainless steel legs (-3/+50 mm)
- Off-cycle defrost.

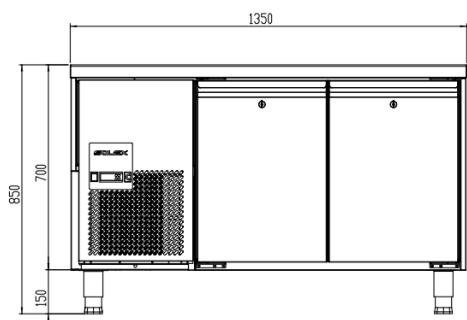
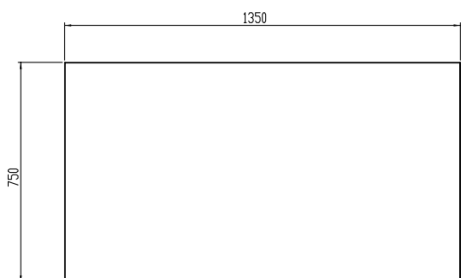
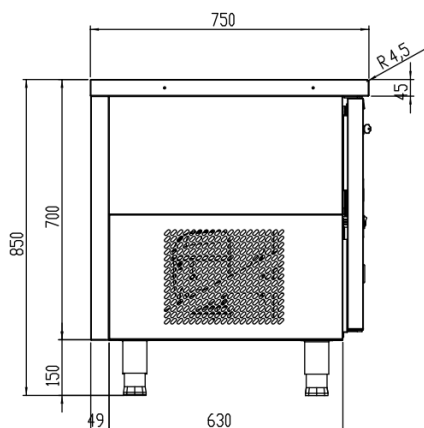
#### CONSTRUCTION

- External construction made of stainless steel AISI 430.
- Internal construction made of stainless steel AISI 430, thickness of 0.35 mm
- Top and front panel stainless steel AISI 430 with 1 mm thickness and hairline surface pattern. Top height as of 45 mm.
- Side panel stainless steel AISI 430 with 0.5 mm thickness and hairline surface pattern
- Insulated doors with a thickness of 70 mm.
- Insulated body with high-density CFC/HCFC-free polyurethane insulation of 70 mm. Top plate with 70 mm insulation.
- Easy to clean one-piece stainless steel dished floor with radiused corners for enhanced hygiene.
- Removable, washable condenser air filter.

#### PT. SOLEX INDO REFRIGERATION

[www.sorex.co.id](http://www.sorex.co.id)

Sorex reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

**FRONT**

**TOP**

**SIDE**


\*Overall dimension in mm

**TECHNICAL DATA**
**External Dimensions**

Width : 1350 mm  
Depth : 750 mm  
Height : 850 mm

**Internal Dimensions**

Width : 830 mm  
Depth : 560 mm  
Height : 560 mm  
Volume : 260 liters

**Refrigeration Properties**

Temperature : +2 °C ...12 °C  
Control type : Temperature controlled  
Cooling Capacity: 709 W / to -10 °C  
Refrigerant : R404A

**Electrical Supply Data**

Connected Load : 0.7 kW  
Voltage : 230V, 1PNE AC / 50 Hz  
Recommended fuse : 10A (slow)

**Heat Emissions**

Direct heat emission : 0.49 kW

**PACKAGING DATA**

Width : 1410 mm  
Depth : 800 mm  
Height : 970 mm  
Volume : 1.09 m<sup>3</sup>

**WEIGHT**

Net Weight : 114 kg  
Gross Weight : 135 kg

**INCLUDED ACCESSORIES**

- Two PVC-coated wire shelves GN 1/1 per door compartment.
- Power cable, H07RN-F (3x 2.5 mm).
- Washable condenser filter.

**OPTIONAL ACCESSORIES**

- Additional PVC-coated wire shelves GN 1/1.
- Additional stainless steel shelf support (1 pair)

**PT. SOLEX INDO REFRIGERATION**

[www.solex.co.id](http://www.solex.co.id)

Solex reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

6/2/2025