

## Refrigeration - Counter Solex - 700

### Counter Chiller - Salad Table

#### SSTA 2C 700 (6X1/6) GN



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Refrigerated Preparation/Saladette counter with 700 mm depth and opening in the top for 6 x GN 1/6 pans.

Operating temperature from +2 to +12 °C. Suitable for foodservice preparation.

Made entirely of stainless steel AISI 430, internally and externally. High-density CFC/HCFC-free polyurethane insulation with a thickness of 70 mm. Hygienic interior with a dished floor pan. Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions. High-efficient refrigeration unit with refrigerant R404A.

#### OTHER AVAILABLE MODELS

- N/A

#### MAIN FEATURES

- Refrigerated Preparation/Saladette counter with 2 doors, compartments designed for GN 1/1 shelves and pans.
- Performs under tropical climate with an ambient temperature of +15 to +40 °C.
- Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions.
- Self-closing doors with heavy-duty hinges and non-tool removable balloon gaskets.
- Removable racking system with height-adjustable shelf runners in stainless steel and two PVC-coated wire shelves per compartment.
- Energy-efficient anti-condensation door/drawer mullion heaters.
- Lockable door with master keys offering security for the stored products.
- Ducted cold air distribution, ensuring uniform temperature ( $\pm 2^{\circ}\text{C}$ ) among all compartments.
- Slide out/in cassette refrigeration system with a corrosion-resistant coated evaporator and removable condenser filter to support convenient on-site maintenance and servicing.
- Height adjustable, tubular stainless steel legs (-3/+50 mm)
- Off-cycle defrost.

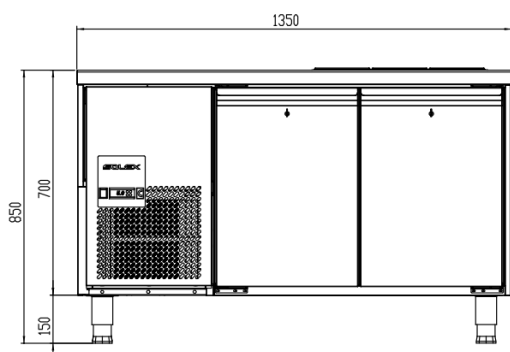
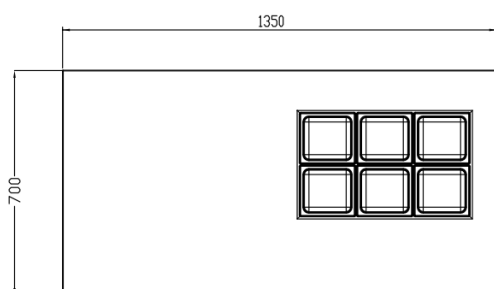
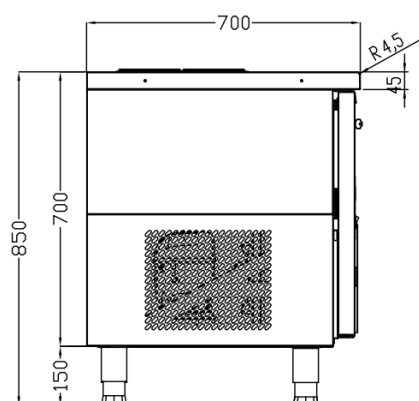
#### CONSTRUCTION

- External construction made of stainless steel AISI 430.
- Internal construction made of stainless steel AISI 430, thickness of 0.35 mm
- Top and front panel stainless steel AISI 430 with 1 mm thickness and hairline surface pattern. Top height as of 45 mm.
- Side panel stainless steel AISI 430 with 0.5 mm thickness and hairline surface pattern
- Insulated doors with a thickness of 70 mm.
- Insulated body with high-density CFC/HCFC-free polyurethane insulation of 70 mm. Top plate with 70 mm insulation.
- Easy to clean one-piece stainless steel dished floor with radiused corners for enhanced hygiene.
- Removable, washable condenser air filter.

#### PT. SOLEX INDO REFRIGERATION

[www.solex.co.id](http://www.solex.co.id)

Solex reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

**FRONT**

**TOP**

**SIDE**


\*Overall dimension in mm

**TECHNICAL DATA**
**External Dimensions**

|        |           |
|--------|-----------|
| Width  | : 1350 mm |
| Depth  | : 700 mm  |
| Height | : 850 mm  |

**Internal Dimensions**

|        |              |
|--------|--------------|
| Width  | : 830 mm     |
| Depth  | : 560 mm     |
| Height | : 560 mm     |
| Volume | : 260 liters |

**Refrigeration Properties**

|                  |                          |
|------------------|--------------------------|
| Temperature      | : +2 °C ...12 °C         |
| Control type     | : Temperature controlled |
| Cooling Capacity | : 709 W / to -10 °C      |
| Refrigerant      | : R404A                  |

**Electrical Supply Data**

|                  |                         |
|------------------|-------------------------|
| Connected Load   | : 0.7 kW                |
| Voltage          | : 230V, 1PNE AC / 50 Hz |
| Recommended fuse | : 10A (slow)            |

**Heat Emissions**

|                      |           |
|----------------------|-----------|
| Direct heat emission | : 0.49 kW |
|----------------------|-----------|

**PACKAGING DATA**

|        |                       |
|--------|-----------------------|
| Width  | : 1410 mm             |
| Depth  | : 750 mm              |
| Height | : 970 mm              |
| Volume | : 1.09 m <sup>3</sup> |

**WEIGHT**

|              |          |
|--------------|----------|
| Net Weight   | : 109 kg |
| Gross Weight | : 135 kg |

**INCLUDED ACCESSORIES**

- Two PVC-coated wire shelves GN 1/1 per door compartment.
- Power cable, H07RN-F (3x 2.5 mm).
- Washable condenser filter.

**OPTIONAL ACCESSORIES**

- Various GN pan configurations.
- Additional PVC-coated wire shelves GN 1/1.
- Additional stainless steel shelf support (1 pair)

**PT. SOLEX INDO REFRIGERATION**

[www.solex.co.id](http://www.solex.co.id)

Solex reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

6/2/2025