

Refrigeration - Counter Solex - 750

Counter Chiller - Salad Table

SSTA 2C 750 (6X1/6) GN



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Refrigerated Preparation/Saladette counter with 750 mm depth and opening in the top for 6 x GN 1/6 pans.

Operating temperature from +2 to +12 °C. Suitable for foodservice preparation.

Made entirely of stainless steel AISI 430, internally and externally. High-density CFC/HCFC-free polyurethane insulation with a thickness of 70 mm. Hygienic interior with a dished floor pan. Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions. High-efficient refrigeration unit with refrigerant R404A.

OTHER AVAILABLE MODELS

- N/A

MAIN FEATURES

- Refrigerated Preparation/Saladette counter with 2 doors, compartments designed for GN 1/1 shelves and pans.
- Performs under tropical climate with an ambient temperature of +15 to +40 °C.
- Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions.
- Self-closing doors with heavy-duty hinges and non-tool removable balloon gaskets.
- Removable racking system with height-adjustable shelf runners in stainless steel and two PVC-coated wire shelves per compartment.
- Energy-efficient anti-condensation door/drawer mullion heaters.
- Lockable door with master keys offering security for the stored products.
- Ducted cold air distribution, ensuring uniform temperature ($\pm 2^{\circ}\text{C}$) among all compartments.
- Slide out/in cassette refrigeration system with a corrosion-resistant coated evaporator and removable condenser filter to support convenient on-site maintenance and servicing.
- Height adjustable, tubular stainless steel legs (-3/+50 mm)
- Off-cycle defrost.

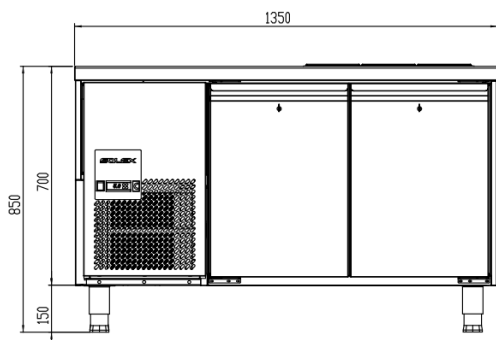
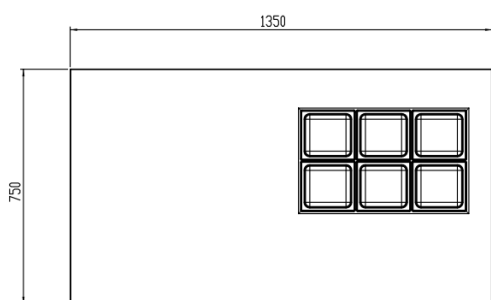
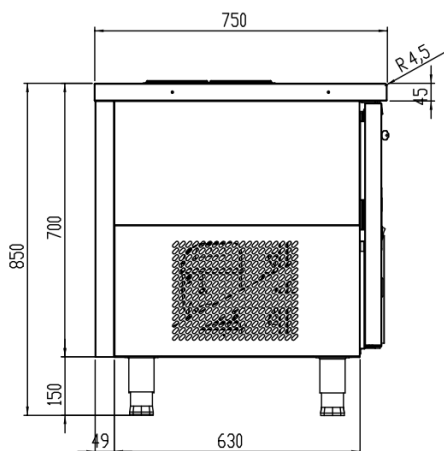
CONSTRUCTION

- External construction made of stainless steel AISI 430.
- Internal construction made of stainless steel AISI 430, thickness of 0.35 mm
- Top and front panel stainless steel AISI 430 with 1 mm thickness and hairline surface pattern. Top height as of 45 mm.
- Side panel stainless steel AISI 430 with 0.5 mm thickness and hairline surface pattern
- Insulated doors with a thickness of 70 mm.
- Insulated body with high-density CFC/HCFC-free polyurethane insulation of 70 mm. Top plate with 70 mm insulation.
- Easy to clean one-piece stainless steel dished floor with radiused corners for enhanced hygiene.
- Removable, washable condenser air filter.

PT. SOLEX INDO REFRIGERATION

www.solex.co.id

Solex reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

FRONT

TOP

SIDE


*Overall dimension in mm

TECHNICAL DATA
External Dimensions

Width	: 1350 mm
Depth	: 750 mm
Height	: 850 mm

Internal Dimensions

Width	: 830 mm
Depth	: 560 mm
Height	: 560 mm
Volume	: 260 liters

Refrigeration Properties

Temperature	: +2 °C ...12 °C
Control type	: Temperature controlled
Cooling Capacity	: 709 W / to -10 °C
Refrigerant	: R404A

Electrical Supply Data

Connected Load	: 0.7 kW
Voltage	: 230V, 1PNE AC / 50 Hz
Recommended fuse	: 10A (slow)

Heat Emissions

Direct heat emission	: 0.49 kW
----------------------	-----------

PACKAGING DATA

Width	: 1410 mm
Depth	: 800 mm
Height	: 970 mm
Volume	: 1.09 m ³

WEIGHT

Net Weight	: 114 kg
Gross Weight	: 135 kg

INCLUDED ACCESSORIES

- Two PVC-coated wire shelves GN 1/1 per door compartment.
- Power cable, H07RN-F (3x 2.5 mm).
- Washable condenser filter.

OPTIONAL ACCESSORIES

- Various GN pan configurations.
- Additional PVC-coated wire shelves GN 1/1.
- Additional stainless steel shelf support (1 pair)

PT. SOLEX INDO REFRIGERATION

www.solex.co.id

Solex reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

6/2/2025