


# MGB 5 Port Alloy Head Modified Vs Stock

Flow @ 25" H2O

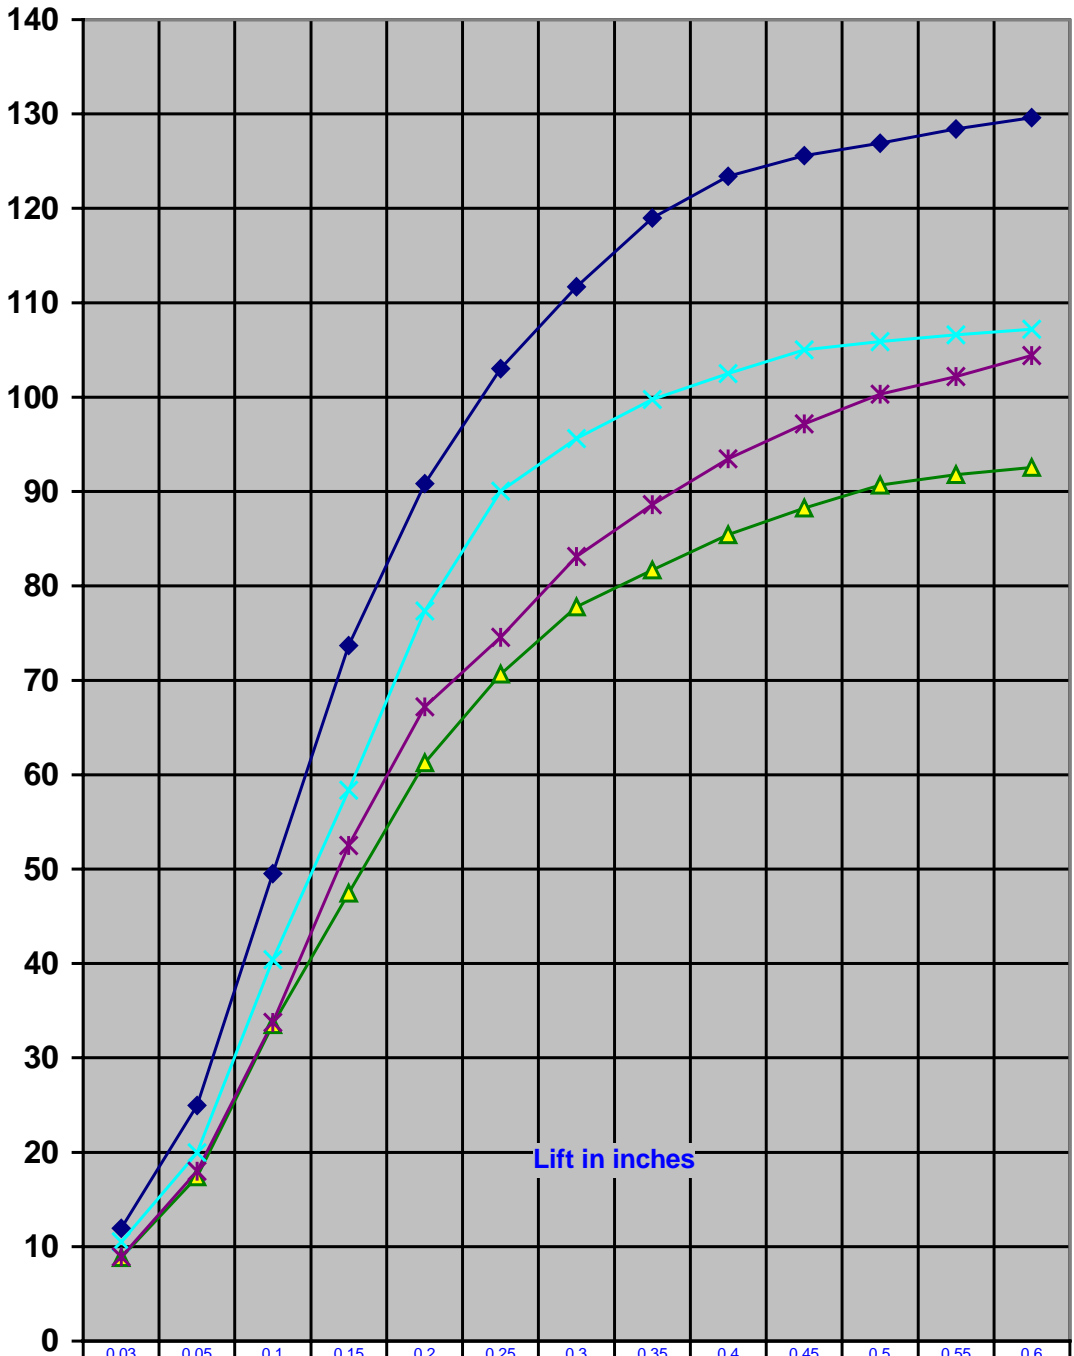

	0.03	0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.55	0.6
Modified Port Rimflo Valve In. 1.625"	11.94	24.95	49.5	73.69	90.84	103	111.7	119	123.4	125.6	126.9	128.4	129.6
5 Port Alloy Exhaust 1.345"	8.836	17.39	33.52	47.45	61.26	70.65	77.79	81.68	85.42	88.27	90.66	91.78	92.56
5 Port Alloy Intake 1.56"	10.5	19.95	40.41	58.34	77.33	90.03	95.61	99.76	102.5	105	105.9	106.6	107.2
Modified Port Rimflo Valve Ex. 1.345"	8.913	18.01	33.74	52.51	67.2	74.54	83.13	88.61	93.45	97.16	100.3	102.2	104.4

- ◆ Modified Port Rimflo Valve In. 1.625"
- ▲ 5 Port Alloy Exhaust 1.345"
- ✕ 5 Port Alloy Intake 1.56"
- ✱ Modified Port Rimflo Valve Ex. 1.345"