

Platinum Series Linear Tri-Proof 4ft 60w



DESCRIPTION:

Touch-Plate's Linear Tri-Proof Lights are designed to offer better security, more lumens, and higher cost savings. Our Linear Tri-Proof Lights can offer energy savings of 70% or greater over traditional T12 and T8 bulbs. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Aluminum Housing
- Flicker free
- Water proof
- Rust and corrosion free
- Lifetime of 50,000 hrs or greater
- UL Listed (E469084)
- DLC Listed
 - T56-60w12
- 5 Year Limited Warranty

SPECIFICATIONS:

- Wattage: 60w
- Lumens: 7,800 (approx > 130lm/w)
- Equivalence: 2pc florescent tubes
- IP Rating: IP69
- LED Chips: SMD 2835
- PF: >0.90

PHYSICAL PARAMETERS:

- Dimensions
 - Length: 57.87"
 - Depth: 3.0"
 - Width: 2.7"
- Weight
 - 5.29 lbs

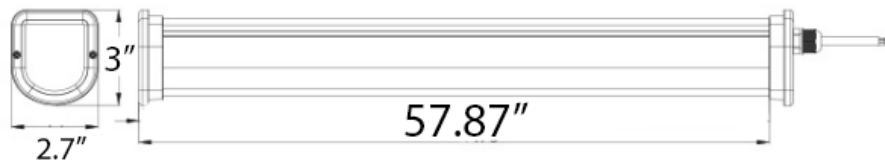



Platinum Series Linear Tri-Proof

ORDERING GUIDE


LED Type XXX -	Lumens - Wattage XXX - XXX-	CCT XX	Voltage X
<ul style="list-style-type: none"> LT4 Linear Tri-Proof 4ft 	<ul style="list-style-type: none"> 078 - 060 7,800lm - 60w 	<ul style="list-style-type: none"> 30 3000k 40 4000k 50 5000k 60 6000k 	<ul style="list-style-type: none"> U 120-277v

ACCESSORIES

(specified at time of order)

- Emergency Backup
- Photocontrol Sensor
- S Hook Clip: Medium or Large
- Stainless Steel Magnetic 'O' Hook
- 3 Pin Splice Connector
- Wall Mount Installation Kit
- Suspended Mount Installation Kit
- Stainless Steel Cable: 2ft/.5m, 3ft/1m, 7ft/2m, 10ft/3m, or 20ft/6m
- No Plug Extension: 3ft/1m or 10ft/3m
- 3 Prong Plug: 7ft/2m

PHOTOMETRIC

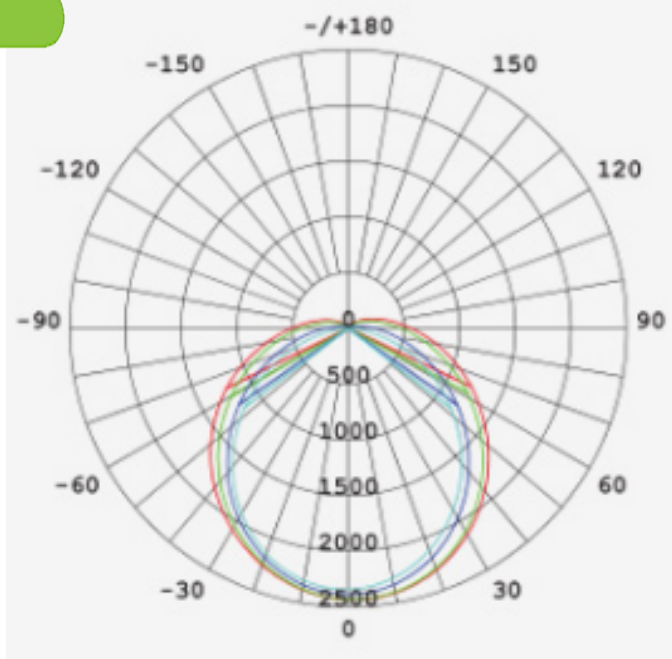

Platinum Series Linear Tri-Proof

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.


DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- Make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.


INSTALLATION INFORMATION




Step1 : Make a right position and open hole




Step2: Fix the expansion screws in the wall




Step3: Screw the clip on the ceiling tightly

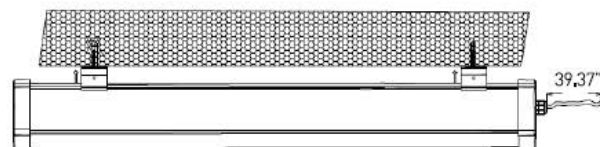

Step4: Install the lamp into the clips

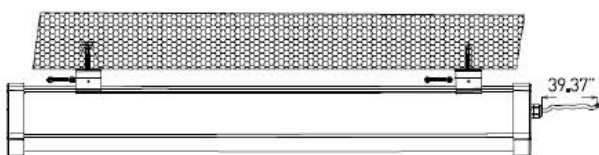

Step5: Insert screw into clip's hole and fixed it

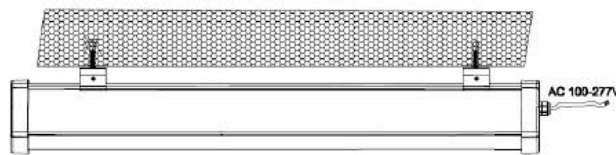

Step6: Adjust the position of the fixture