touch-plate ED LIGHTING & CONTROLS

Bronze Series 1x4 Panel Light 40w

DESCRIPTION:

Touch-Plate's 1x4 Panels Lights were designed to offer better security, more lumens, and higher cost savings. Our 1x4 Panel Lights can offer energy savings of 70% or greater over traditional metal halide or high pressure sodium lighting. Our LEDs are optimal for new construction and retrofit installations.

PRODUCT FEATURES:


- Aluminum/Alloy frame for heat dissipation
- Flicker Free
- **Isolated Driver**
- **Multiple Mounting Options**
- Lifetime of 50,000 hrs or greater
- **DLC Listed**
 - CPS-U3A40-P6
- 5 Year Limited Warranty


SPECIFICATIONS:

- Wattage: 40w
- Lumens: 4,400 (approx > 100lm/w)
- Equivalence: 80w-100w HID/HPS/MH
- IP Rating: IP20
- LED Chips: Jufei
- PF: >0.90

PHYSICAL PARAMETERS:

- **Dimensions**
 - 47.70" o Length:
 - Depth (without junction box): 0.38"
 - Depth (with junction box): 1.80"
 - o Width: 11.90"
- Weight
 - o 16.4 lbs

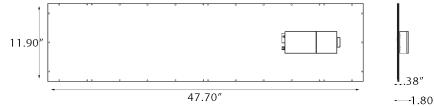







1x4 Panel Light


ORDERING GUIDE

LED Type	Lumens - Wattage	CCT	Voltage	
XXX -	XXX - XXX	XX -	X	
• P14 1'x 4' Panel Light	• 044-040 4,400lm -40w	• 40 4000k	• U 100-277v	

ACCESSORIES

- Emergency Backup
- Occupancy Sensor
- Zigbee Relay
- Zigbee Dimmer
- Zigbee Controller
- Surface Mount Kit
- Flush Mount Kit
- Stainless Steel Cable: 2ft/.5m, 3ft/1m, 7ft/2m, 10ft/3m, or 20ft/6m
- Lock Twist Plug: 3ft/1m or 10ft/3m
- No Plug Extension: 3ft/1m or 10ft/3m
- S Hook Clip: Medium & Large
- S Hook Clip: Medium & Large Stainless Steel Magnetic 'O' Hook



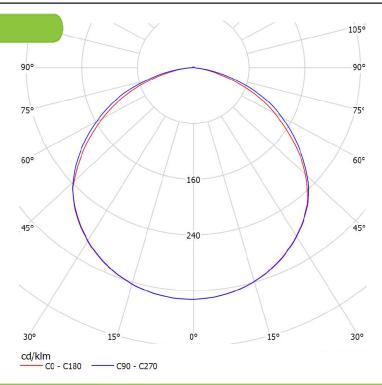





1x4 Panel Light

INSTALLATION INFORMATION (WIRING)

This product must be installed in accordance with National Electrical Code(NEC) and/or applicable local codes, by a qualified electrician.


DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION

- 1x4 Panel Lights can be ordered with a specified twist lock plug or without a plug.
- Plug in the 1x4 Panel Light or make the necessary 'HOT' (Black or Brown), 'Neutral' (White or Blue), and 'Ground' (Green) connections in an approved junction box.


INSTALLATION INFORMATION




2. Connect the conduit to the driver box.




3. Make the nessary connections in the driver box. 4. Replace the driver cover and affix with the screw.





1. Replace the existing light fixture with the LED Light Panel.



2. Use the protective brackets to safely mount the LED Panel.

