
CLOSET DRESSER SECTION

BUILD TIME = 1 DAY | EST. COST TO BUILD = \$250 | SKILL LEVEL = INTERMEDIATE / ADVANCED



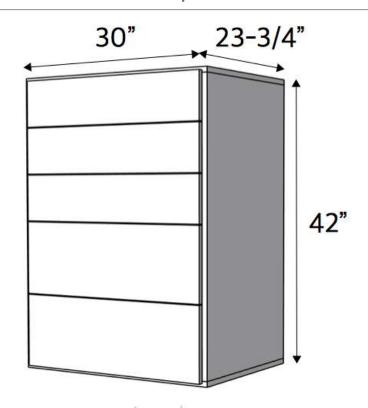

REQUIRED TOOLS

- Drill / Driver
- ☐ Circular Saw &/or Table Saw
- ☐ Speed Square
- Brad Nailer (Optional)
 - To hold box in place during assembly
- ☐ Tape Measure
- ☐ Pencil
- Safety Glasses
- ☐ Hearing Protection

MATERIALS

- ☐ 3/4" x 2' x 4' MDF or Plywood
 - ☐ For Drawer Fronts
- ☐ 3/4" x 4' x 8' MDF or Plywood
 - For Box and Drawer Fronts
- **Q**ty 2 3/4" x 4' x 8' Plywood
 - ☐ For Drawer Boxes
- Qty 5 Drawer Slides
- 1-1/2" Trim Screws
- ☐ 3" Wood Screws
- ☐ 1-1/2" Brad Nails (optional)
- ☐ Wood Glue
- ☐ Wood Filler

1




CUT LIST

3/4" x 2' x 4' MDF or Plywood




28-1/2"


3/4" x 4' x 8' MDF or Plywood

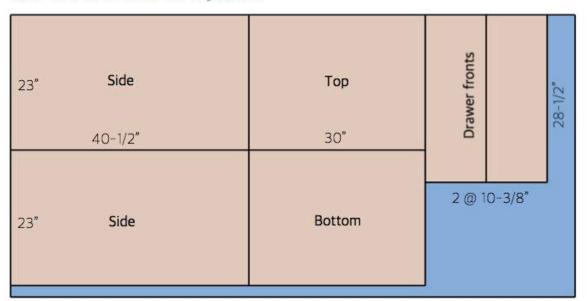




Note: Width of drawer fronts may change depending on final opening and overall installation/appearance.



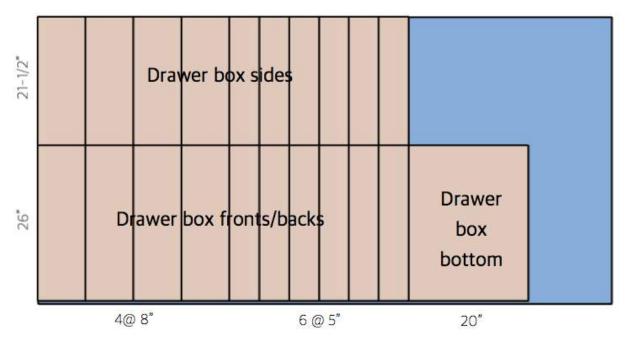

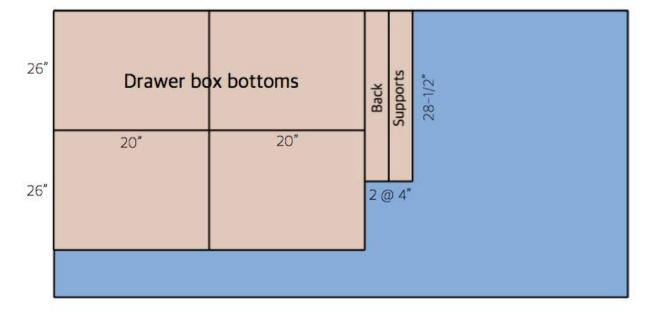




Note: Width of drawer fronts, backs and bottoms may change depending on final opening and overall installation/appearance.


Step 1: Assemble Box

Pre-drill and assemble using 1-1/2" trim screws.
(Not all shown)

Then, locate the wall studs using a stud finder. Using a level, make sure the front and sides of the unit are plumb and secure the unit to the wall studs using at least 3" wood screws.

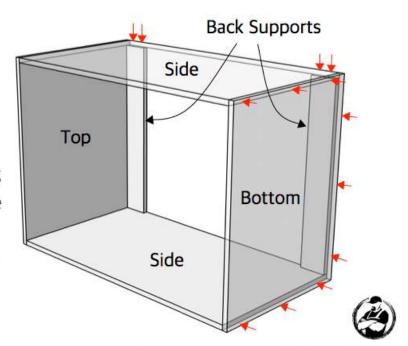

Step 2: Drawer Boxes

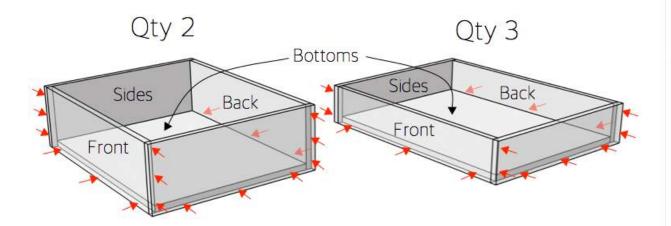


Assemble drawer boxes with wood glue and

1-1/2" staples or 18g brad nails



Step 3: Install Drawers

Install drawers at heights shown using drawer slides and included hardware.

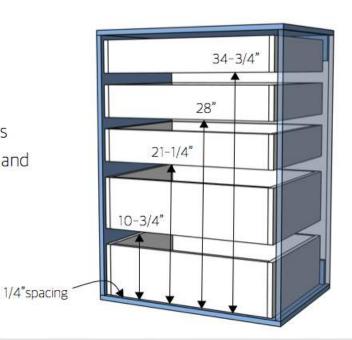



Step 4: Install Drawer Fronts

Locate bottom most drawer front and space the remaining drawer fronts 1/8" apart.

Temporarily install with hot glue or double faced tape.

Install drawer fronts with 1–1/4" wood screws from within the drawers.



